




 **GODKENDT
TIL DRIKKEVAND**

vola



705230 286211

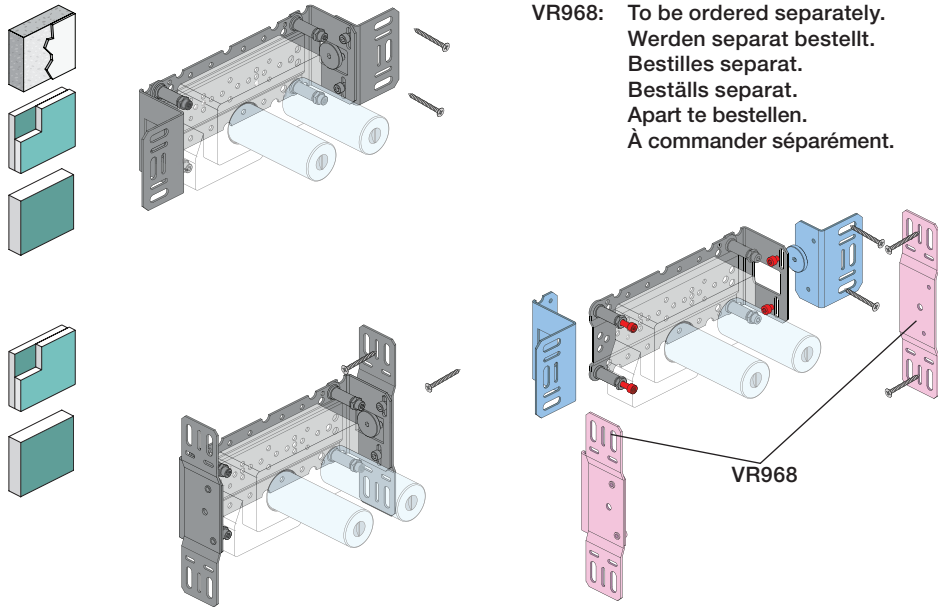
[illegible]

VR968

 Max. 65°C, 150°F

200M

PEX1

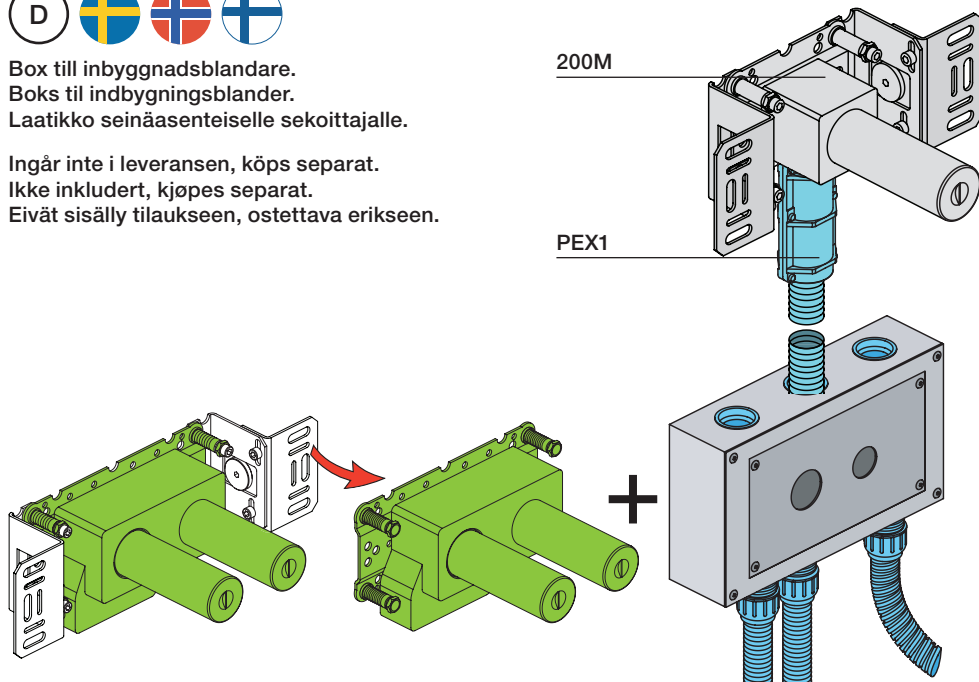

VR1260

VR2260


The diagram shows a cross-section of a standard extension cord. It consists of a blue standard section on the left, a yellow extension section in the middle, and a red section on the right. The yellow section is labeled 'EXTENSION' and has markings for +10, +20, +30, +40, and +50 feet. The red section is labeled 'DO NOT REMOVE' and has a warning symbol. A dimension line labeled 'Y' indicates the length of the yellow extension section. A ruler at the bottom shows the length of the cord in feet, from 1 to 10.

Fitting of extension
Montage von verlängerung
Montering af forlængerdele

VR1260+


VR2260+

VR2019+, VR2119+

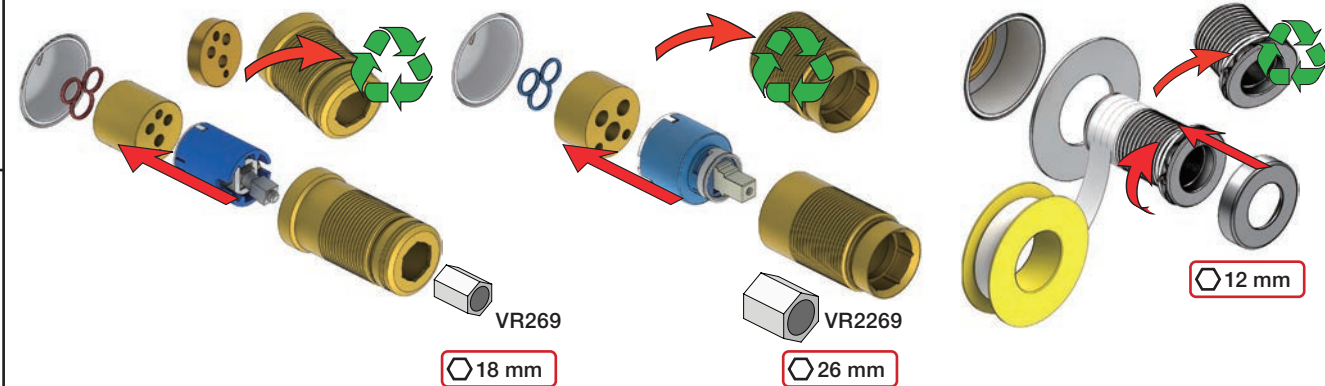

VR1400+

400-2400

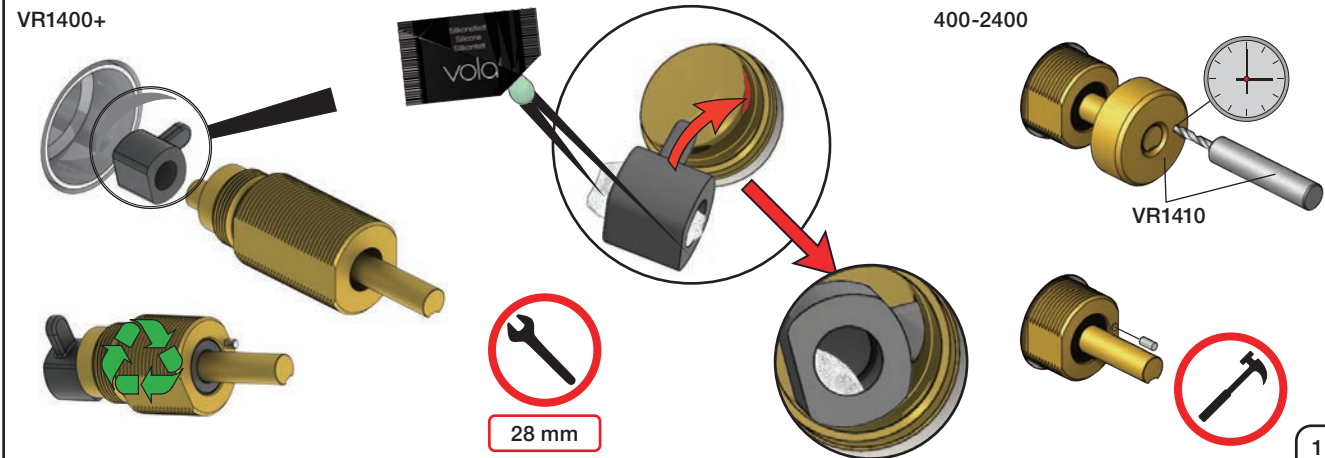

	X	VR2260 + VR1400 + VR2019
	35 - 47 mm	Std.
	25 - 35 mm	+10
	15 - 25 mm	+20
	5 - 15 mm	+30
	-5 - 5 mm	+40
	-15 - -5 mm	+50



2x13 mm Lightweight wall
Leichtwand
Let væg

Lätta konstruktion
Holle wandconstructie
Construction légère



1x15 mm
1x18 mm
1x20 mm

2x13 mm

Lightweight wall
Leichtwand
Let væg

Lätta konstruktion
Holle wandconstructie
Construction légère



Masonry
Mauerwerk
Murværk

Murverk
Massive wand
Mur Plein



2

Test Pressure
Prüfdruck
testtryk
Test tryck
Test druk
test de pression

Check the local legislation.
Bitte die örtlichen Vorschriften überprüfen.
Tjek de lokale regler.
Kontrollera den lokala lagstiftning.
Verifieer de lokale regelgeving.
Vérifiez la législation locale.



1. MAX. 16 Bar 232 Psi

2. MAX. 4 Bar 58 Psi

! Water - Wasser - Vand - Vatten - Water - L'eau
! MAX 1 Minute - Minut - Minuut !



Do not cut the membrane
Die Membran nicht schneiden
Skær ikke membranen
* Skär inte membranet
Snij het membraan niet door
Ne coupez pas la membrane
No cortar la membrana



*Membran används inte i SVERIGE,
ihop med inbygggnadsboxen.


NR.21:

1

NR.28+19+24:


2

Förlängning
Verlängerung
Forlængelse
Modification



VR2260/VR1400/VR2019


Tiles:	3 - 15 mm	Std.
Fliesen:	15 - 25 mm	+10
Fliser:	25 - 35 mm	+20
Tegels:	35 - 45 mm	+30
Carreaux:	45 - 55 mm	+40
	55 - 65 mm	+50




VR2260/VR1400/VR2019

	35 - 47 mm	Std.
	25 - 35 mm	+10
	15 - 25 mm	+20
	5 - 15 mm	+30
	-5 - 5 mm	+40
	-15 - -5 mm	+50

NR 21



NR 21 - 1



VR2279


VR2279B

VR2279C




		A
VR2279	16 mm	30 - 34 mm
VR2279B	12 mm	26 - 30 mm
VR2279C	8 mm	22 - 26 mm


NR 21 - 2




NR 21 - 3




NR 21 - 4






VR1260/VR1400/VR2019		
Titles: Fliessen: Fliessen:	Tegels: 3 - 15 mm	Std.
	Carreaux: 15 - 25 mm	+10
	25 - 35 mm	+20
	35 - 45 mm	+30
Titles: Fliessen: Fliessen:	45 - 55 mm	+40
	55 - 65 mm	+50




VR1260/VR1400/VR2019		
Titles: Fliessen: Fliessen:	40 - 52 mm	Std.
	30 - 40 mm	+10
	20 - 30 mm	+20
	10 - 20 mm	+30
Titles: Fliessen: Fliessen:	0 - 10 mm	+40
	-10 - 0 mm	+50

NR 19/NR24



NR 19:
Ø40 mm
Ø1 5/8"
NR 24:
Ø43 mm
Ø1 3/4"

NR 28




NR 28 - 1

VR3279

VR3279B

NR 28 - 2

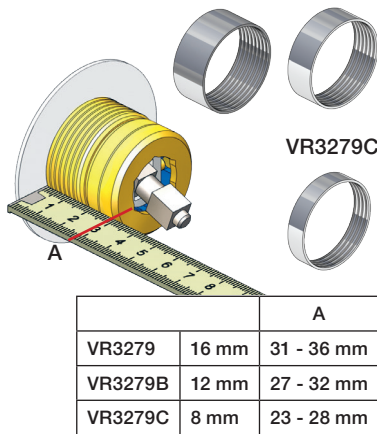


	A	
VR3279	16 mm	31 - 36 mm
VR3279B	12 mm	27 - 32 mm
VR3279C	8 mm	23 - 28 mm

NR 19 - 1 NR 24 - 1

VR2204


VR2204B

VR2204C

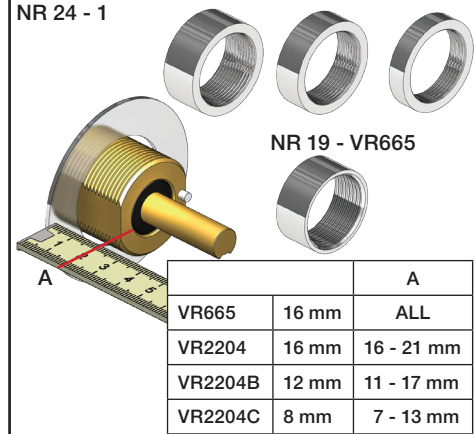


	A	
VR665	16 mm	ALL
VR2204	16 mm	16 - 21 mm
VR2204B	12 mm	11 - 17 mm
VR2204C	8 mm	7 - 13 mm


NR 28 - 3

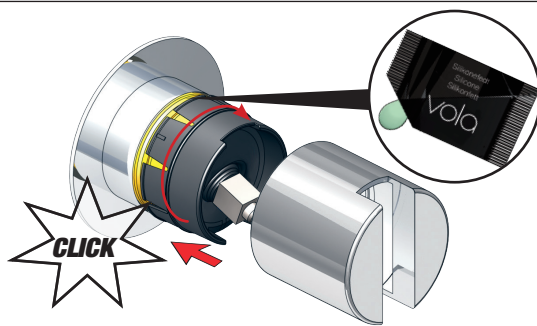

NR 28 - 4



NR 19 - 2 NR 24 - 2

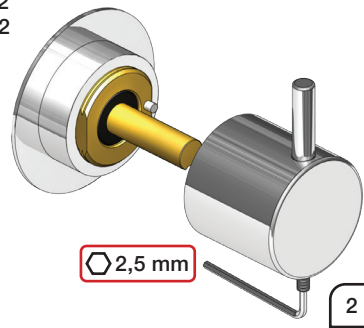





2400V

Diagram illustrating the exploded view of a 2400V electrical component assembly, showing various parts and their assembly sequence.

Key components and labels include:

- 1400
- 406
- 2213
- 403
- 21
- 2205
- 2204C
- 2204B
- 2204
- 2424
- NR24*
- NR24**
- 2A
- 23
- 968
- 969
- 2269
- 2260
- 2279
- 1275
- 22
- 20D
- 2273
- 2278
- 2279B
- 2279C
- NR21
- NR21L: 2273L
- NR21M: 2273M
- 1410
- 1411
- 1902
- 2260+
- 1277
- 2251
- 972
- x8
- D: 1249K
- 1249
- 1400+
- 2213+
- 2205+

NR21:	VR20D, VR22, VR1275, VR2269, VR2273, VR2278, VR2279, VR2279B, VR2279C
NR24*:	VR2A, VR22, VR1419, VR2204, VR2204B, VR2204C - (Brass, Messing, Laiton)
NR24**:	VR2A, VR22, VR1419, VR2204 - (Stainless steel, Edelstahl, Rustfrit stål, Acier inoxydable)
VR1277K:	VR22, VR2269, VR1277
VR1400:	VR21, VR23, VR406, VR1902, VR2213

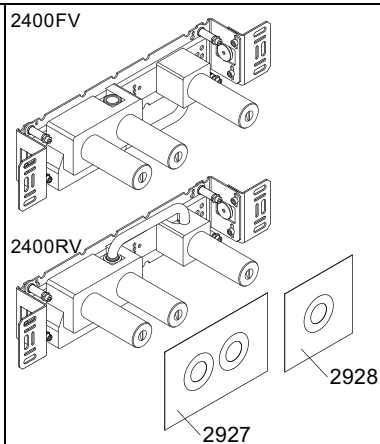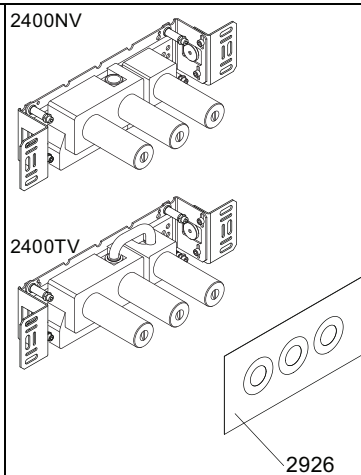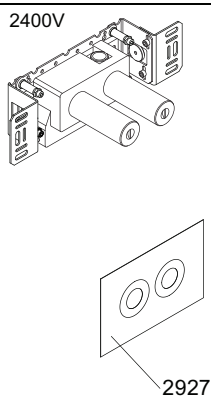

1040



2003K



2004



2003



2001, 001G



2001, 001G, 001



2001, 001G, 001



vola®
Lunavej 2
DK-8700 Horsens
Tlf : + 45 7023 5500
sales@vola.com
www.vola.com

VOLA 2400

2400V/FV/NV/RV/TV

Date
May. 22

Rev. 5

Sheet
SB 10.10