

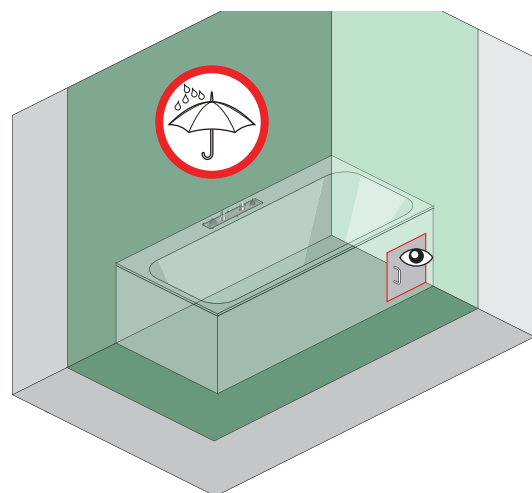


BK

Fitting instruction
Montageanleitung
Monteringsvejledning
Monteringsvægledning
Montage handleiding
Manuel de montage


$$\begin{array}{l} \text{BK} \\ \text{BKA} \\ \text{BKB} \end{array} \quad \begin{array}{l} 1 - 4 + 5 - 15 \\ A1 - A4 + 5 - 16 \\ B1 - B3 + 5 - 16 \end{array}$$


BK_V1_40998626
31-01-2020




Ⓢ BK: 1, 2, 5, 7, 9



Ⓛ BK: 3, 4, 6, 8, 10, 11, 12, 13, 14, 15, 16

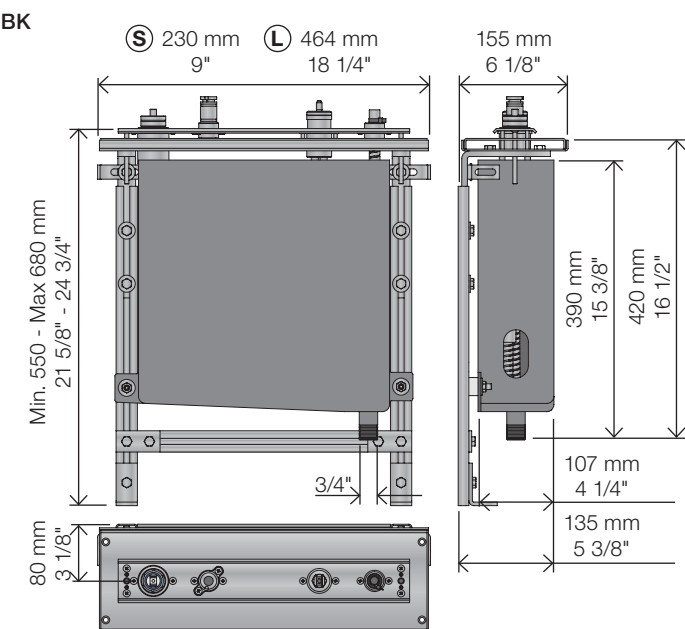


BKA

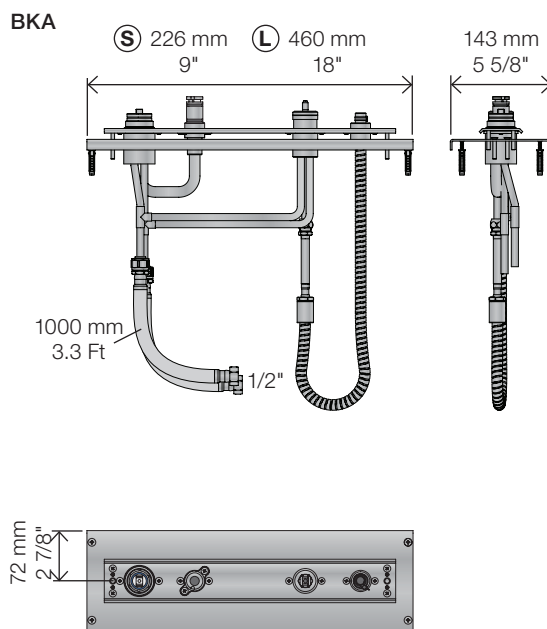


BKB

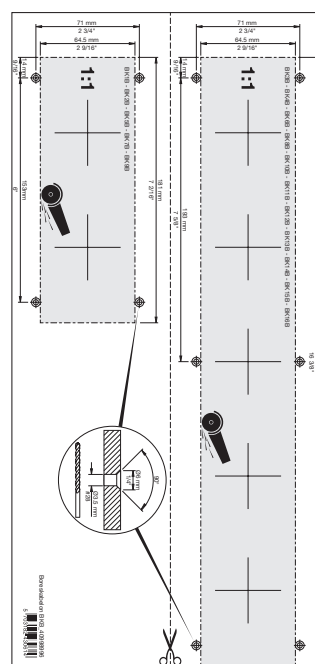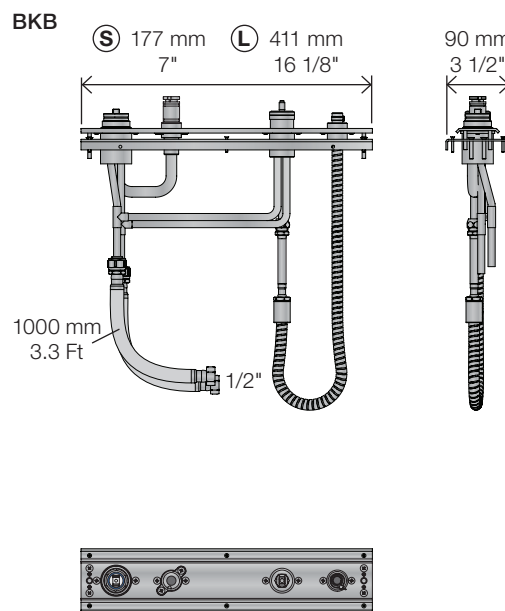


BK

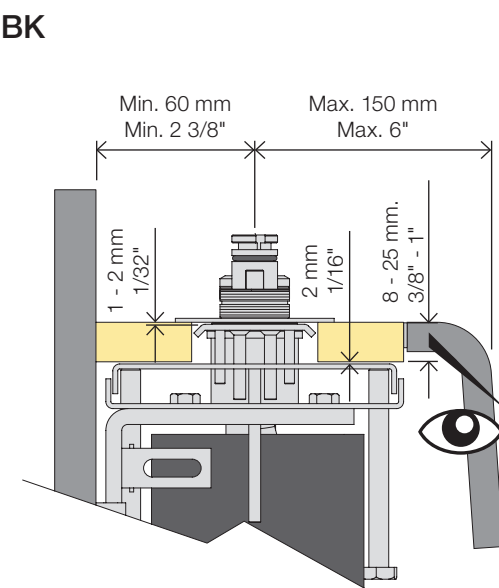


1

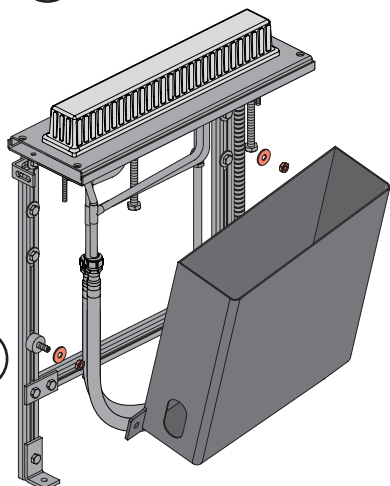



2

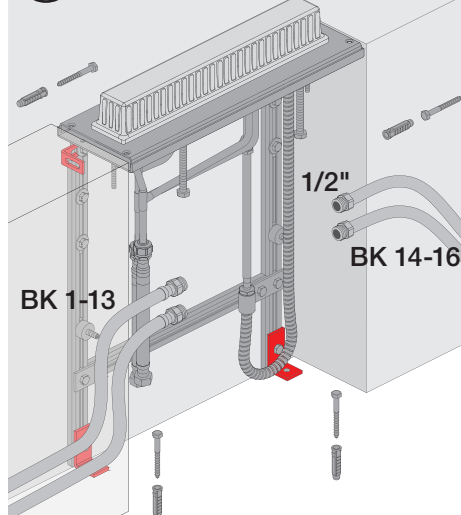

3

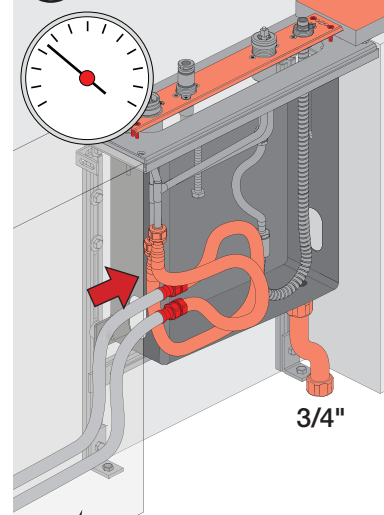


4

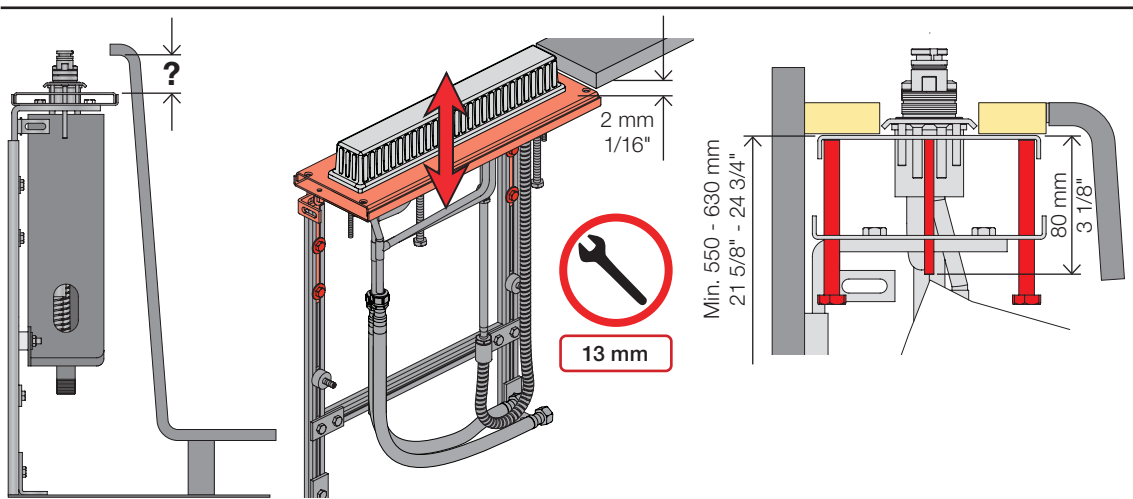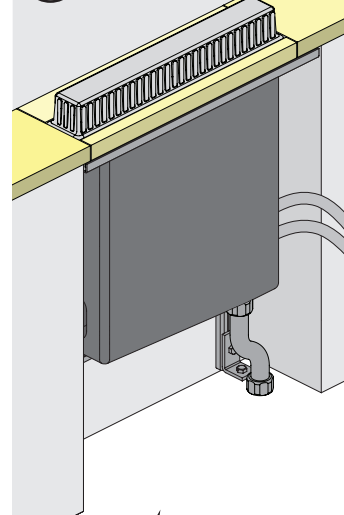


Technical drawing of the rear view of the lamp housing. The drawing shows a rectangular lamp body with a textured outer ring and a smooth inner ring. The overall width is 182 mm (7 1/8 inches) and the overall height is 66 mm (2 5/8 inches). The mounting bracket on the right has a length of 415 mm (16 3/8 inches).


BK

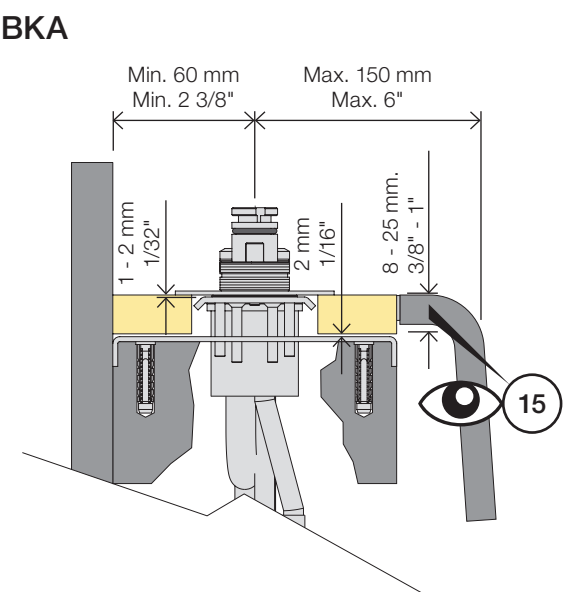


A1

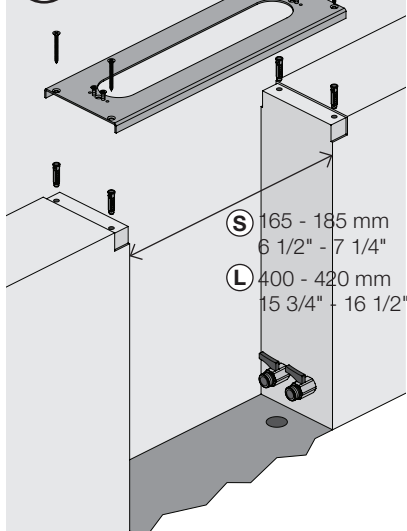


A2

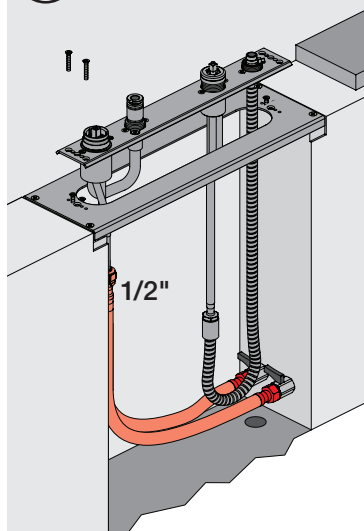















A3

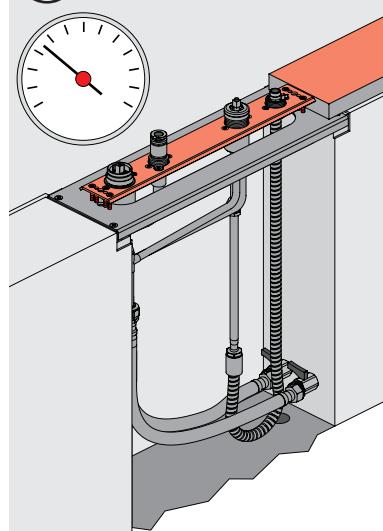

A4

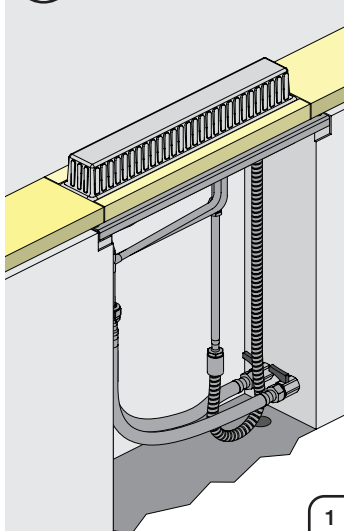

BKB

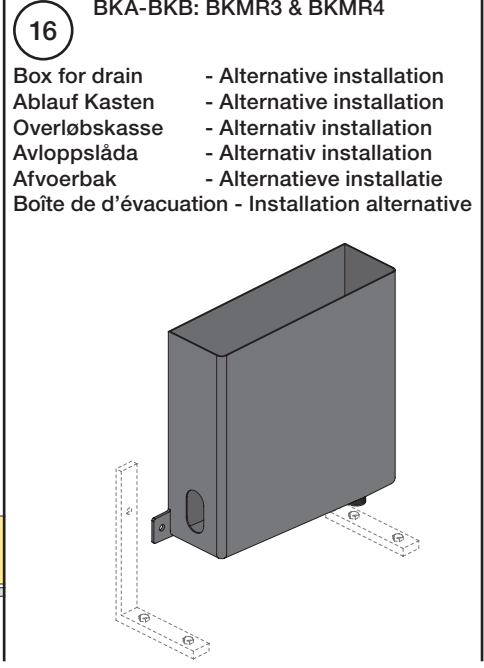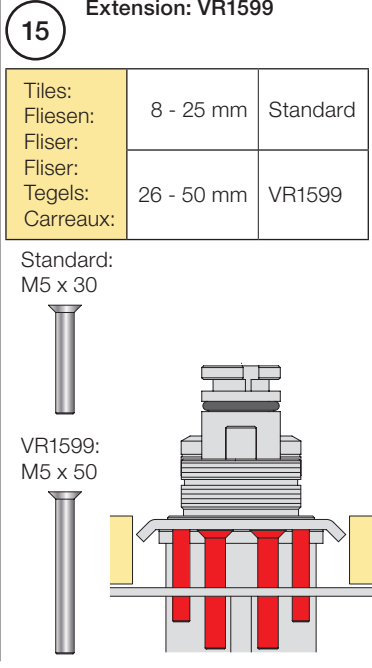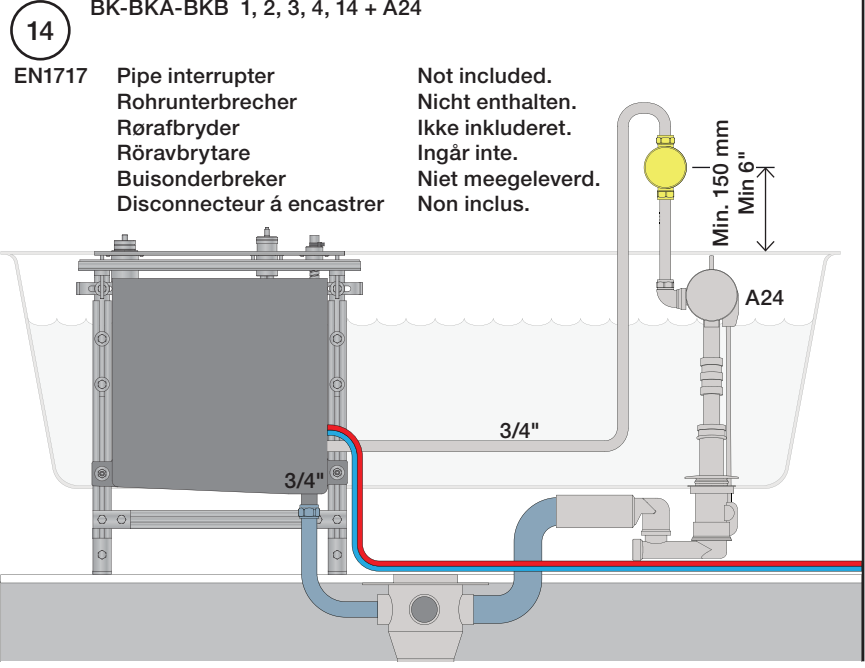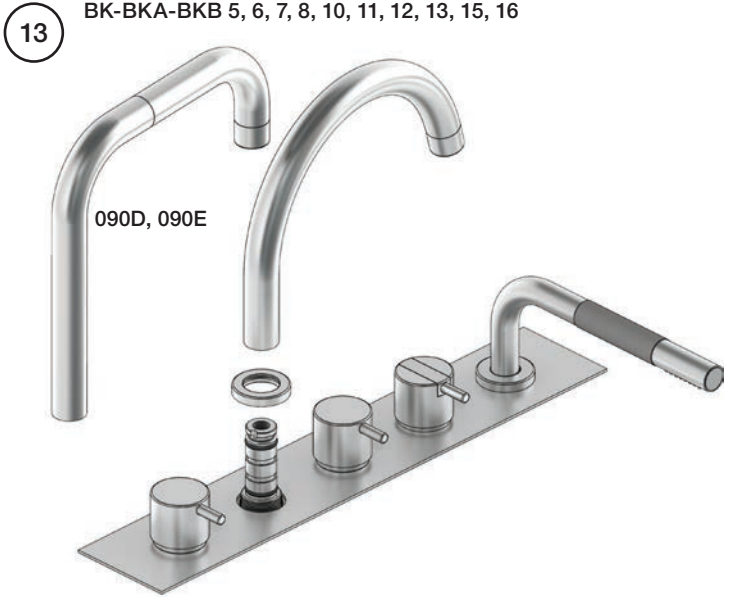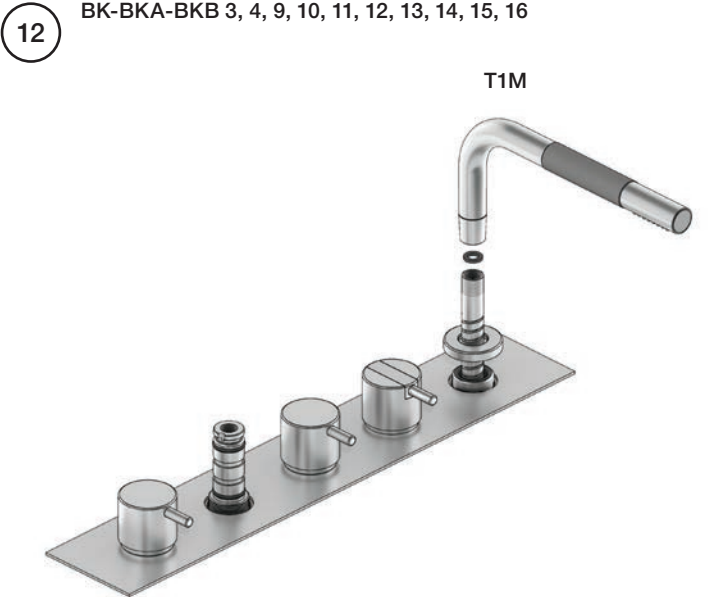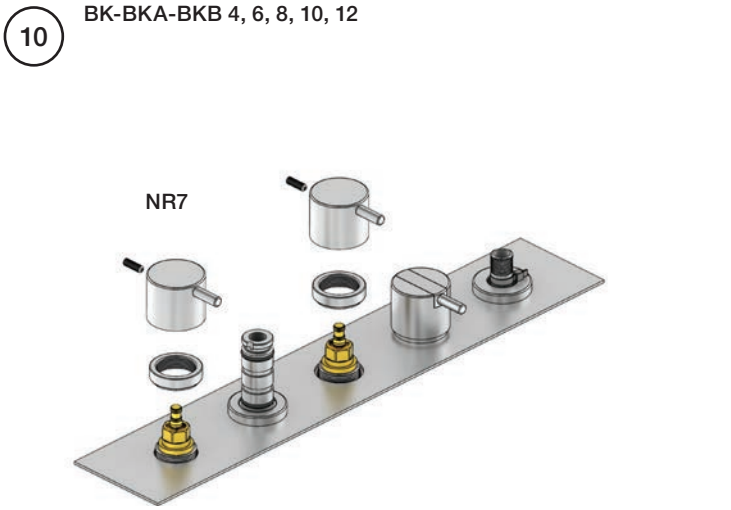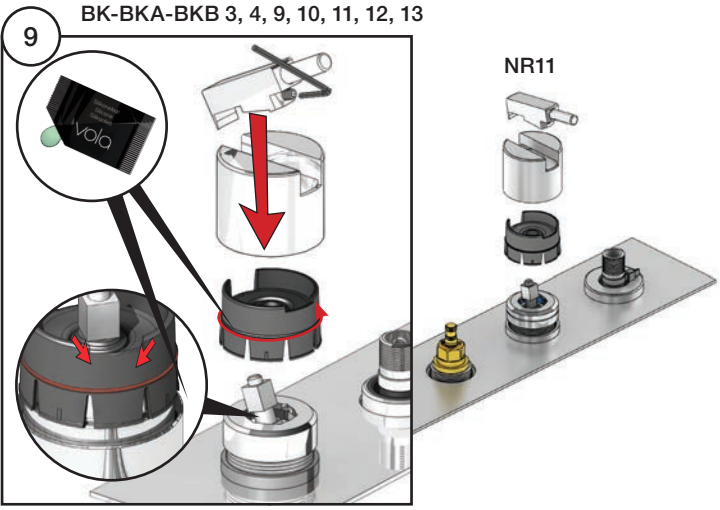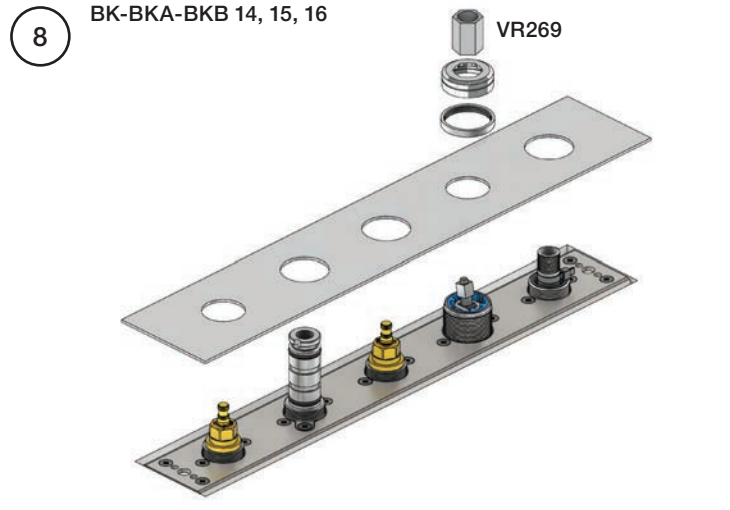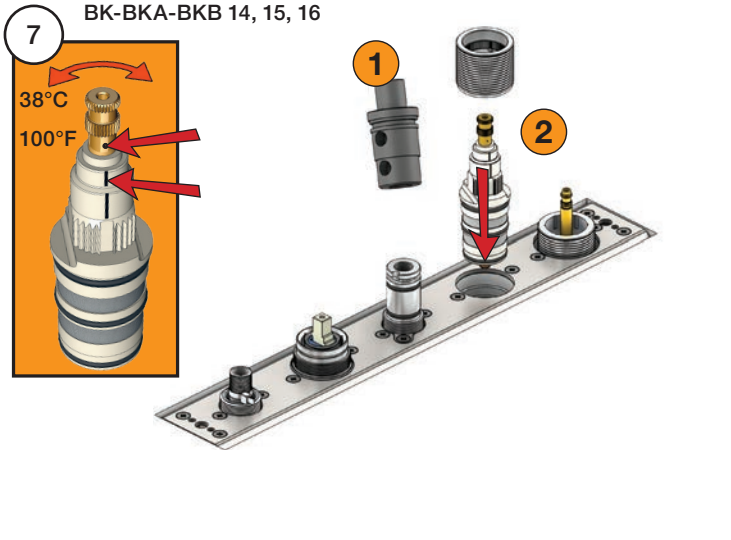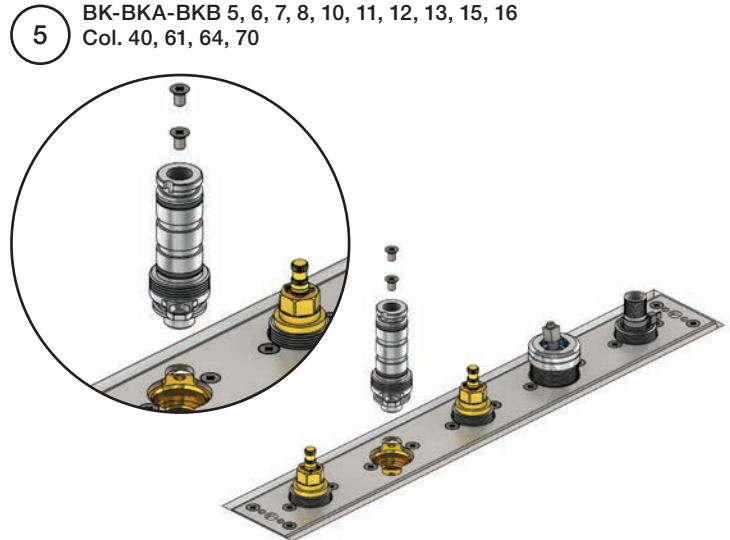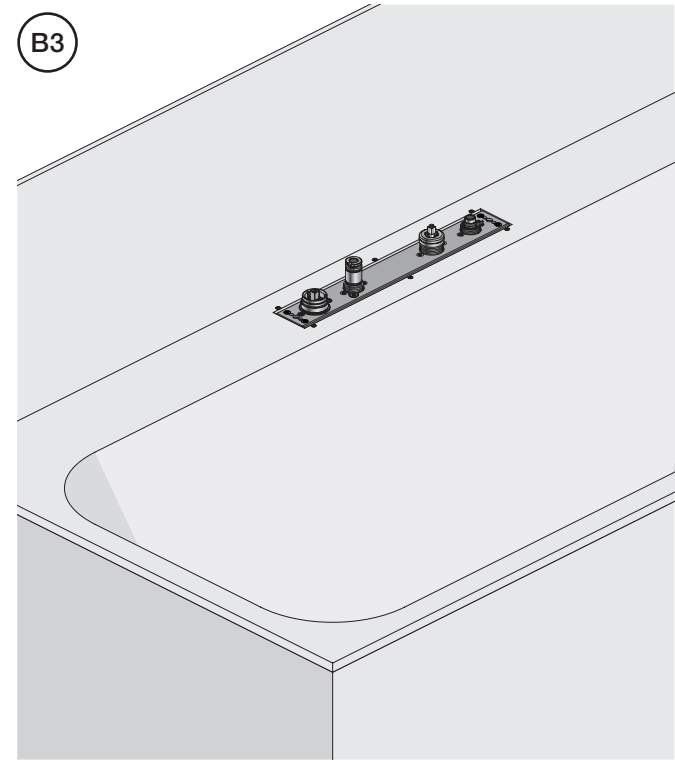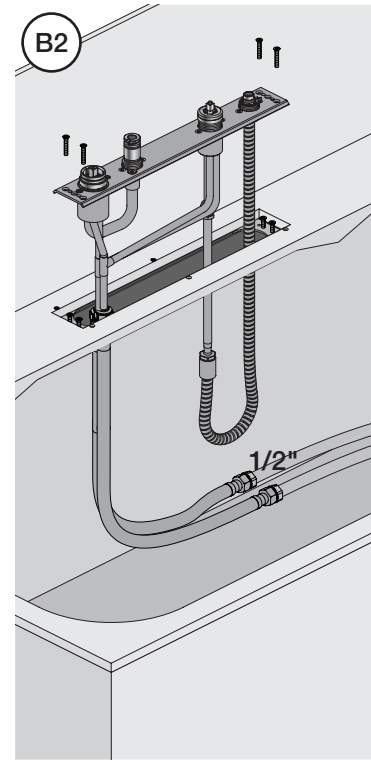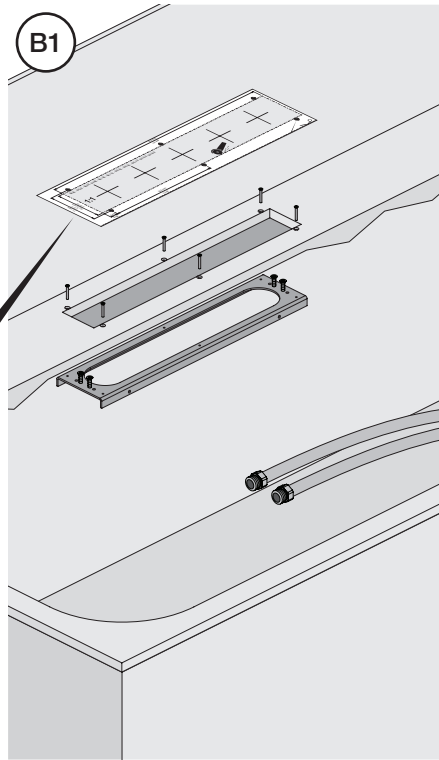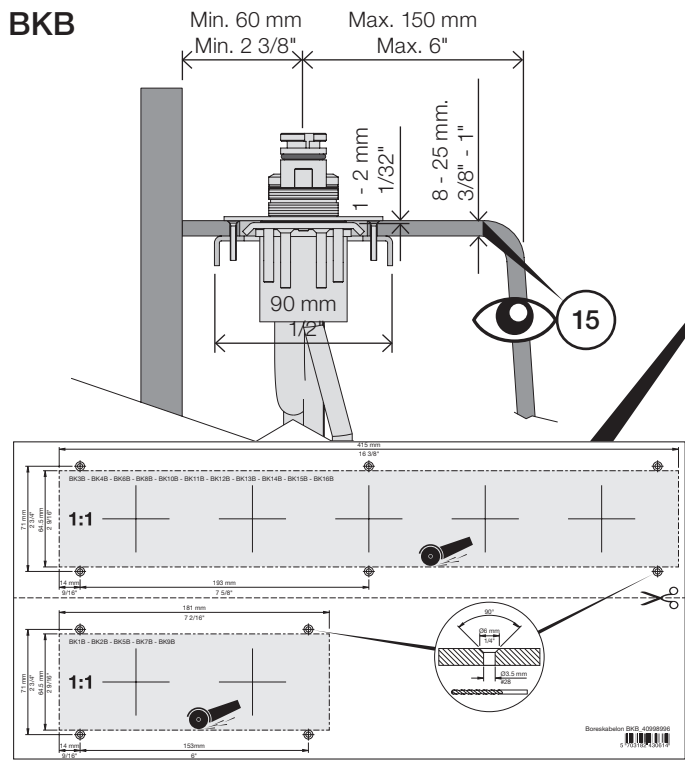

17

Data, 3 Bar (Max. 10 Bar):

		l/min.	Gal/min.
T1		10	2.6
090D/E	{ BK 5, 7, 10, 12:	20	5.3
	{ BK 6, 8, 11, 13:	25	6.6
	{ BK 15, 16:	25	6.6
A24	{ BK 1, 3:	15	3.9
	{ BK 2, 4:	19	5.0
	{ BK 14:	22	5.8

A vertical thermometer icon with a red bulb and a red liquid column. The scale is not explicitly labeled, but it is used to indicate a temperature range.

Max. 65°C, 150°F

2

Sheet
SB 67