


Fitting instruction
Montageanleitung
Monteringsvejledning
Monteringsvægledning
Montage hanleiding
Manuel de montage

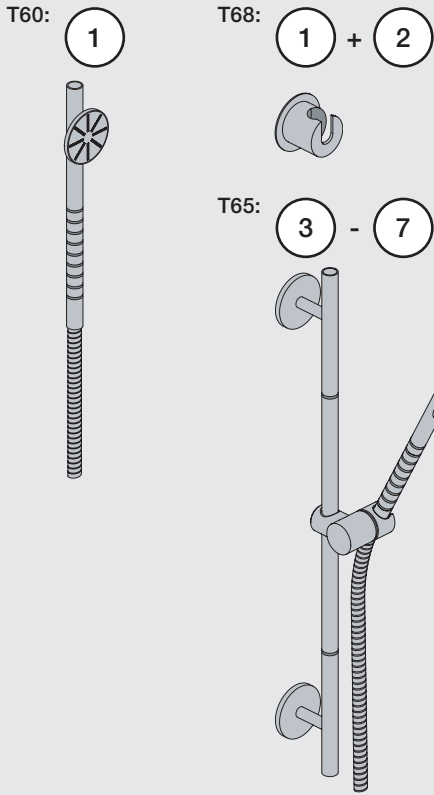

1 T60

28 mm 1 1/8"

55 mm 2 1/8"

Ø17 mm Ø11/16"

290 mm 11 3/8"

1500 mm 5'

G1/2"

Ø60 mm Ø2 3/8"

Data	Bar:	1	2	3	4	5
T60	(l/min)	6.9	9.8	12	14	15
	(Gal/min)	1.8	2.6	3.2	3.7	4.1

Max. 65°C. 150°F

Service - VR556

USA: Max. flow rate: 1.6 Gal/min 6.0 l/min.

2 T68

Ø43 mm Ø1 3/4"

40 mm 1 5/8"

Ø6 mm 1/4"

25 mm 1"

001G

SILICONE

Bathtub Badewanne

Badekar Badkar

Badkuip Baignoire

3 T65

50 mm 2"

55 mm 2 1/8"

Ø60 mm Ø2 3/8"

490 mm 19 1/4"

590 mm 23 1/4"

690 mm 27 1/8"

790 mm 31"

900 mm 35 3/8"

490 mm 19 1/4"

590 mm 23 1/4"

690 mm 27 1/8"

790 mm 31"

900 mm 35 3/8"



600 mm 23 5/8"

700 mm 27 1/2"




800 mm 31 1/2"

900 mm 35 3/8"




4

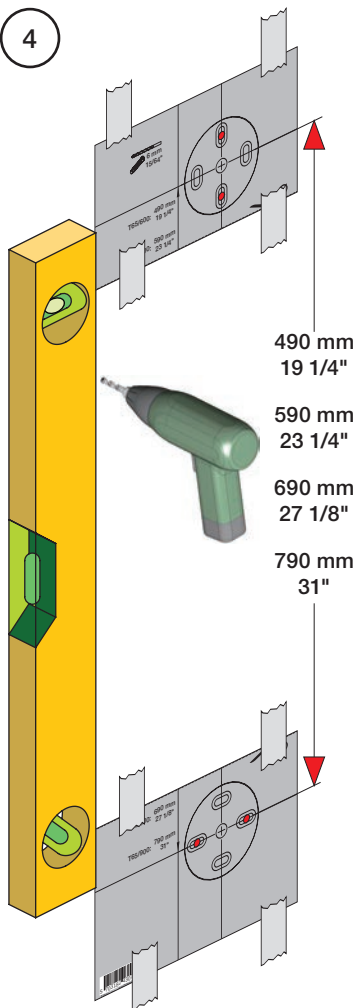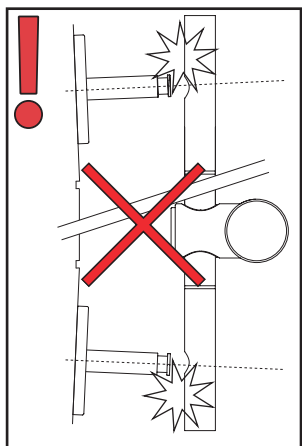490 mm
19 1/4"590 mm
23 1/4"690 mm
27 1/8"790 mm
31"

5

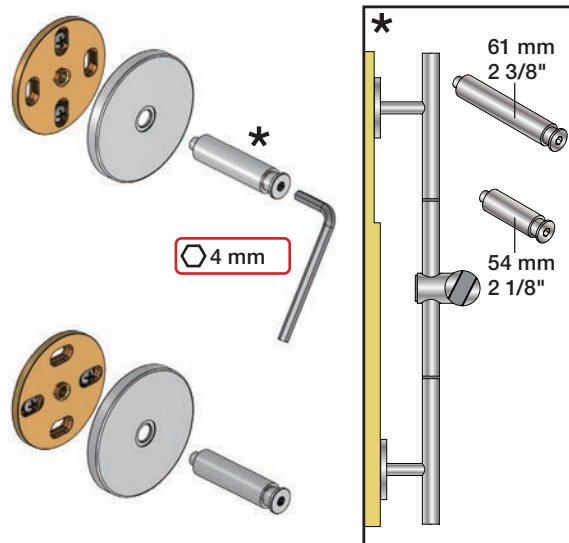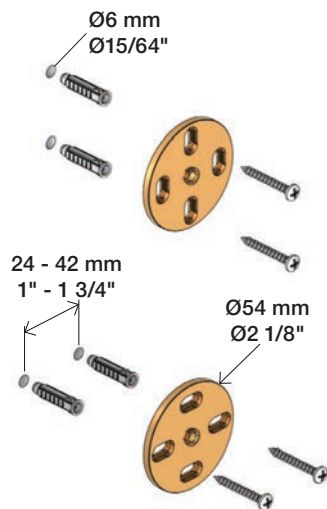

6

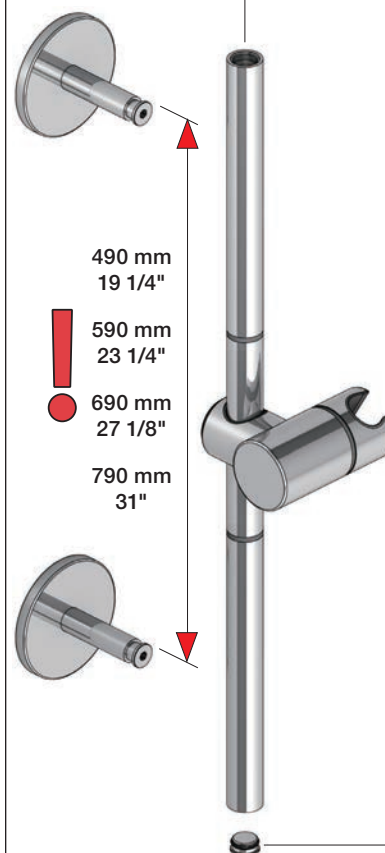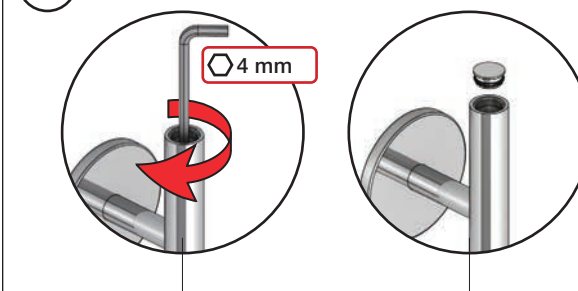
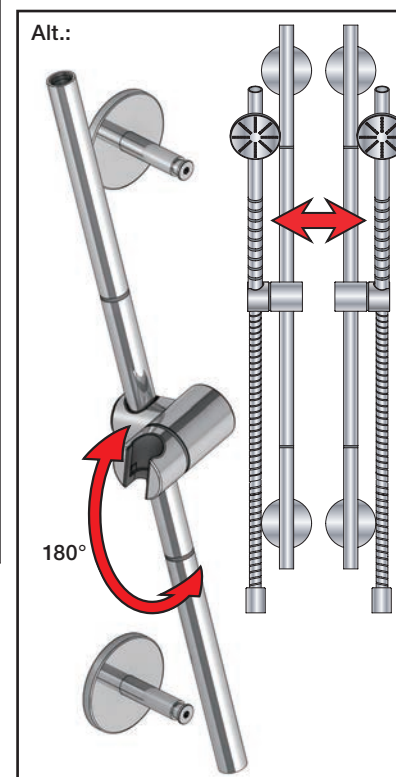
490 mm
19 1/4"590 mm
23 1/4"690 mm
27 1/8"790 mm
31"

7



8



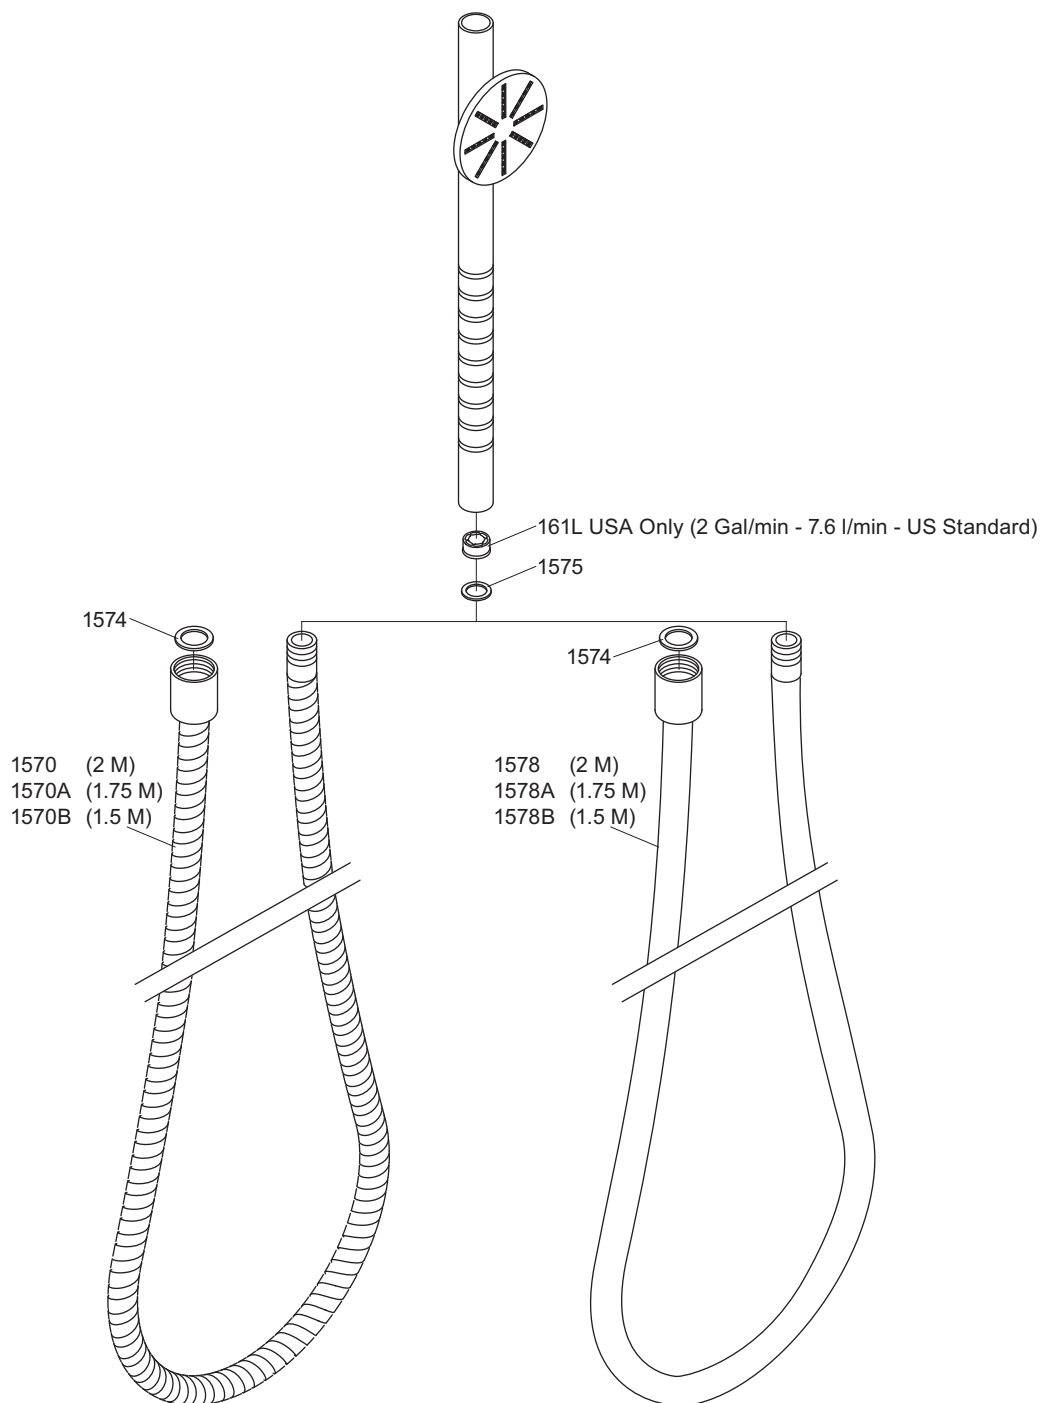

VOLA A/S
 Lunavej 2
 DK-8700 Horsens
 Tlf : + 45 7023 5500
 Fax: + 45 7023 5511
 sales@vola.com
 www.vola.com

VOLA T60

Dato

Mar. 15

Rev.

0

Blad

SB 42.60