

VOLA 100, 100X, 200, 200V, 300  
VOLA 400DV, 400, 400V, 400N, 400NV, 400T  
VOLA 400TV, 400F, 400FV, 400R, 400RV  
VOLA 2100, 2100X, 2200, 2200V, 2300, 2400  
VOLA 2400V, 2400N, 2400NV, 2400T, 2400TV  
VOLA 2400F, 2400FV, 2400R, 2400RV

Fitting instruction      Monteringsv gledning  
Montageanleitung      Montage hanleiding  
Monteringsvejledning      Manuel de montage



04/00029  
04/00031  
04/00055

www.vola.com

100-2100\_V3\_40998502  
09-01-2024

5 705230 286211

| vola.com                                                             | L                 | L1            | L2                | H               | H1               | D               |
|----------------------------------------------------------------------|-------------------|---------------|-------------------|-----------------|------------------|-----------------|
| 100, 100X, 200V, 300, 400V, 400DV<br>2100, 2100X, 2200V, 2300, 2400V | 377 mm<br>14 3/4" | 260 mm<br>10" | 268 mm<br>10 1/2" | 95 mm<br>3 3/4" | 186 mm<br>7 3/8" | 70 mm<br>2 3/4" |
| 400NV, 400TV<br>2400NV, 2400TV                                       | 475 mm<br>18 3/4" | 355 mm<br>14" | 367 mm<br>14 1/2" |                 |                  |                 |
| 400FV, 400RV<br>2400FV, 2400RV                                       | 552 mm<br>21 3/4" | 435 mm<br>17" | 447 mm<br>17 5/8" |                 |                  |                 |

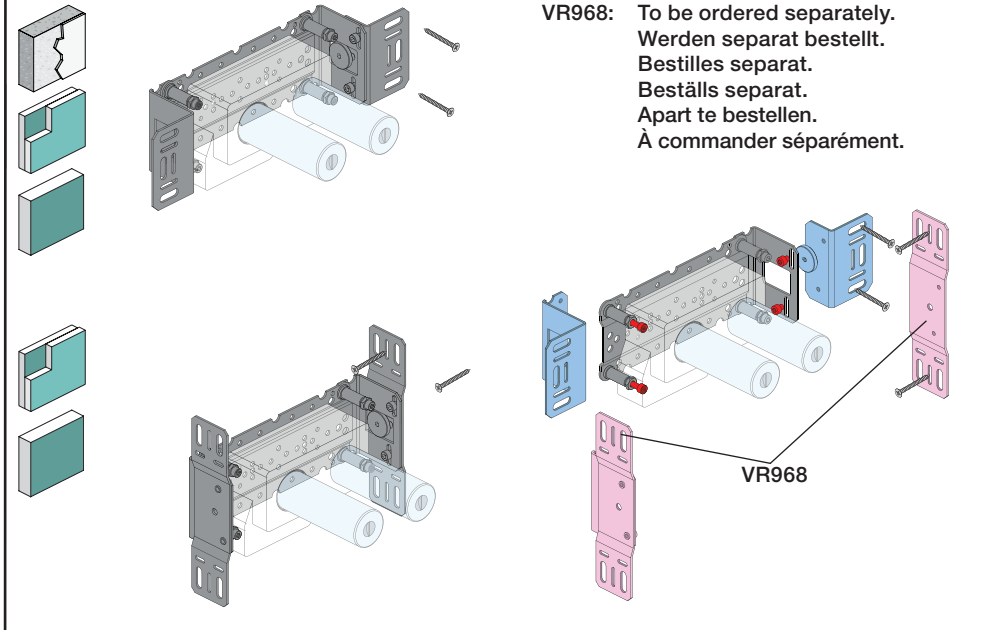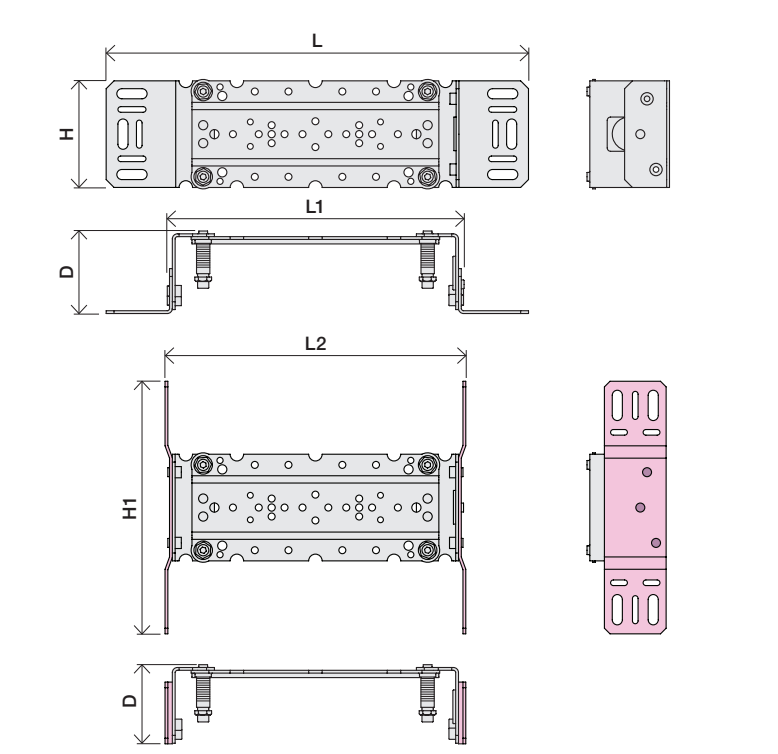

VR968: To be ordered separately.  
Werden separat bestellt.  
Bestilles separat.  
Best lls separat.  
Apart te bestellen.  
  commander s par ment.

| A                    | Data, 3 Bar/43.5 Psi: |        |          | Max. 65 C, 150 F |
|----------------------|-----------------------|--------|----------|------------------|
|                      |                       | l/min. | Gal/min. |                  |
|                      | 100:                  | 18,3   | 4.8      |                  |
|                      | 400V:                 | 15,6   | 4.1      |                  |
|                      | 2100:                 | 25,2   | 6.7      |                  |
| 2400V:               | 22,2                  | 5.9    |          |                  |
| Max.: 10 Bar/145 psi |                       |        |          |                  |

**B** Check the local legislation.  
Bitte die  rtlichen Vorschriften  berpr fen.  
Tjek de lokale regler.  
Kontrollera den lokala lagstiftning.  
Verifieer de lokale regelgeving.  
V rifiez la l gislation locale.

**!DO NOT!  
!REMOVE!**

**C** DE:  
Bitte separat beiliegende Anleitung f r die Schalld mpfer VR1249 beachten

DE:  
Bitte separat beiliegende Anleitung f r die Schallentkopplung VR972 beachten

**D**

Box till inbygggnadsblandare.  
Boks til indbyggningsblander.  
Laatikko sein asenteiselle sekoittajalle.

Ing r inte i leveransen, k ps separat.  
Ikke inkludert, k pes separat.  
Eiv t sis lly tilaukseen, ostettava erikseen.

Extension  
Verl ngerung  
Forl ngerdele  
F rl ngning  
Aanpassing  
Modification

|     |     |     |
|-----|-----|-----|
| STD | +10 | +20 |
| +30 | +40 | +50 |

**T** Min. 3 mm  
Max 65 mm

**Y** Min. 48 mm  
Max. 110 mm

| T          | Y           | VR1260/2260/1400/2019 |
|------------|-------------|-----------------------|
| 3 - 15 mm  | 110 - 98 mm | Std.                  |
| 15 - 25 mm | 98 - 88 mm  | +10                   |
| 25 - 35 mm | 88 - 78 mm  | +20                   |
| 35 - 45 mm | 78 - 68 mm  | +30                   |
| 45 - 55 mm | 68 - 58 mm  | +40                   |
| 55 - 65 mm | 58 - 48 mm  | +50                   |

Fitting of extension  
Montage von verl ngerung  
Montering af forl ngerdele

Montering av f rl ngning  
Montage van de verlengstukken  
Montage des rallonges

Extension, retrofit  
Verl ngerung, nachtr glicher Einbau  
Forl ngerdele, eftermontering  
F rl ngning, eftermontering  
Aanpassing na montage  
Modification apr s installation

**X** 52 - 0 mm

**X** -15 - 0 mm

|  | X          | VR1260 + VR1400 + VR2019 |
|--|------------|--------------------------|
|  | 40 - 52 mm | Std.                     |
|  | 30 - 40 mm | +10                      |
|  | 20 - 30 mm | +20                      |
|  | 10 - 20 mm | +30                      |
|  | 0 - 10 mm  | +40                      |
|  | -10 - 0 mm | +50                      |

|  | X           | VR2260 + VR1400 + VR2019 |
|--|-------------|--------------------------|
|  | 35 - 47 mm  | Std.                     |
|  | 25 - 35 mm  | +10                      |
|  | 15 - 25 mm  | +20                      |
|  | 5 - 15 mm   | +30                      |
|  | -5 - 5 mm   | +40                      |
|  | -15 - -5 mm | +50                      |

VR1260+


VR2260+

VR2019+, VR2119+

VR1400+


400-2400



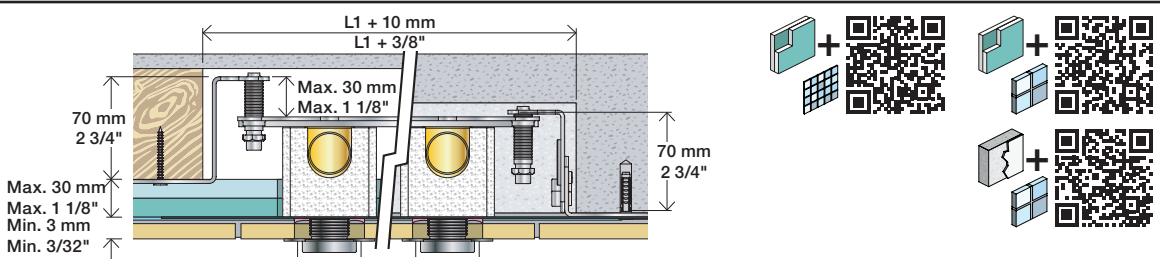

2x13 mm Lightweight wall  
Leichtwand  
Let væg

Lätta konstruktion  
Holle wandconstructie  
Construction légère

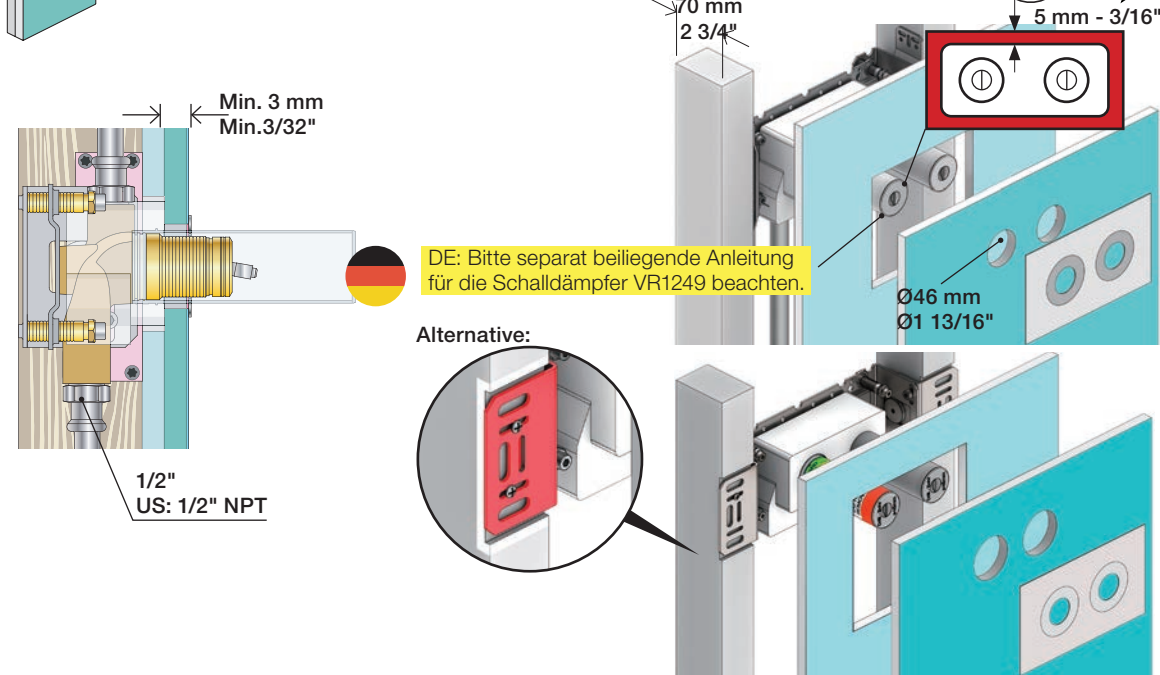


1x15 mm  
1x18 mm  
1x20 mm

2x13 mm


Lightweight wall  
Leichtwand  
Let væg

Lätta konstruktion  
Holle wandconstructie  
Construction légère

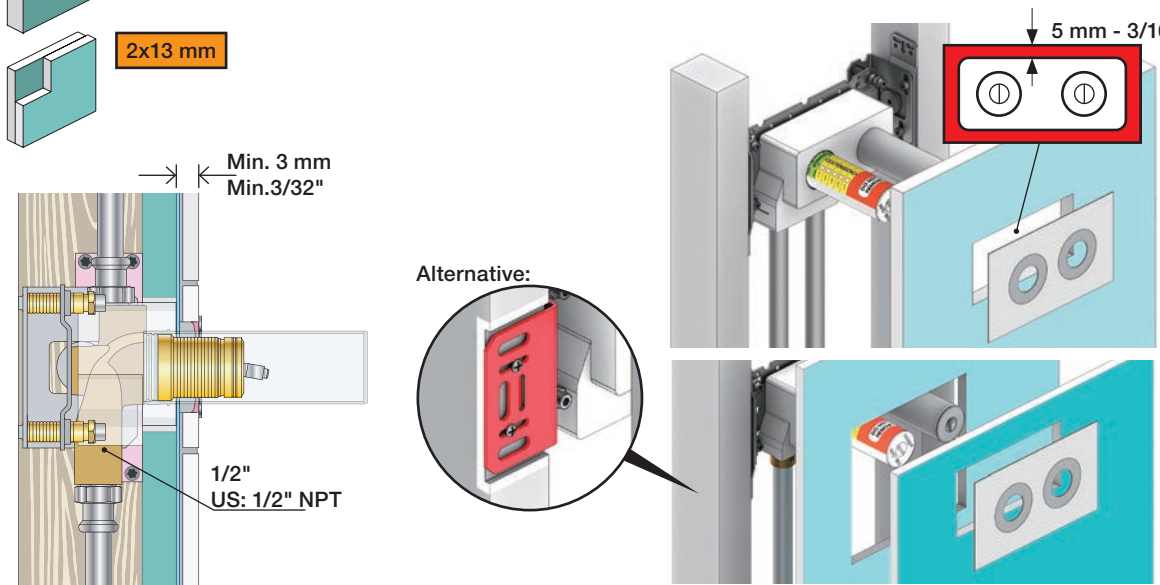

Masonry  
Mauerwerk  
Murværk

Murverk  
Massive wand  
Mur Plein







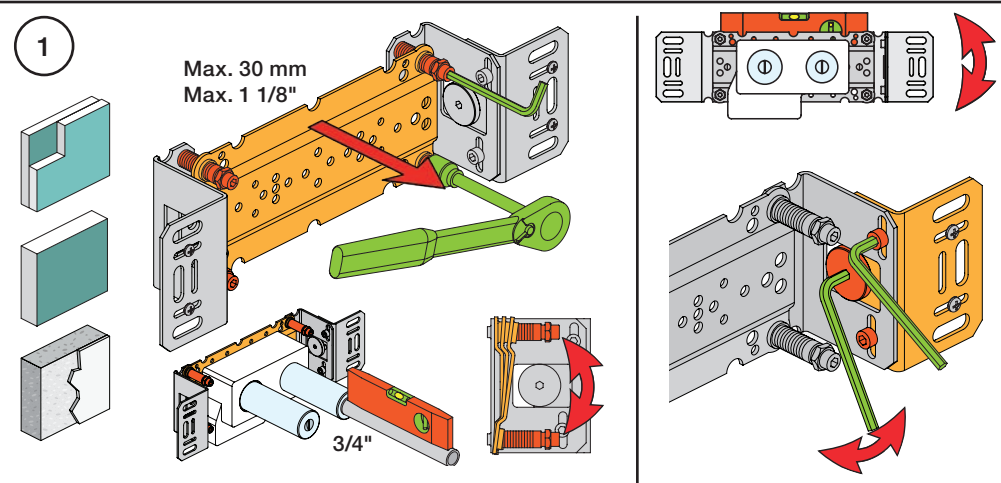


2 Test Pressure  
Prüfdruck  
testtryk  
Test tryck  
Test druk  
test de pression

Check the local legislation.  
Bitte die örtlichen Vorschriften überprüfen.  
Tjek de lokale regler.  
Kontrollera den lokala lagstiftning.  
Verifieer de lokale regelgeving.  
Vérifiez la législation locale.


1. MAX. 16 Bar 232 Psi  
2. MAX. 4 Bar 58 Psi

**! Water - Wasser - Vand - Vatten - Water - L'eau**  
**! MAX 1 Minute - Minut - Minuut !**

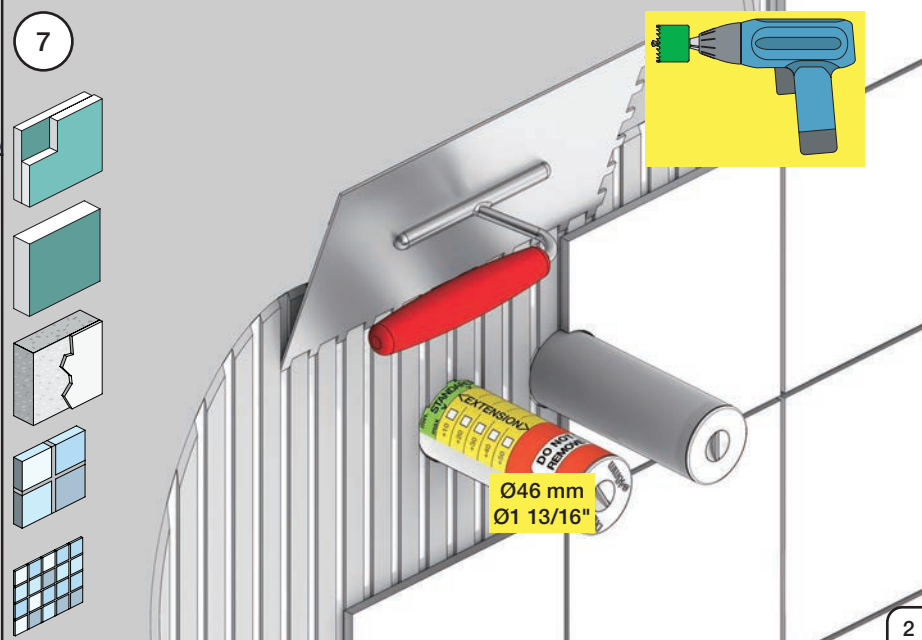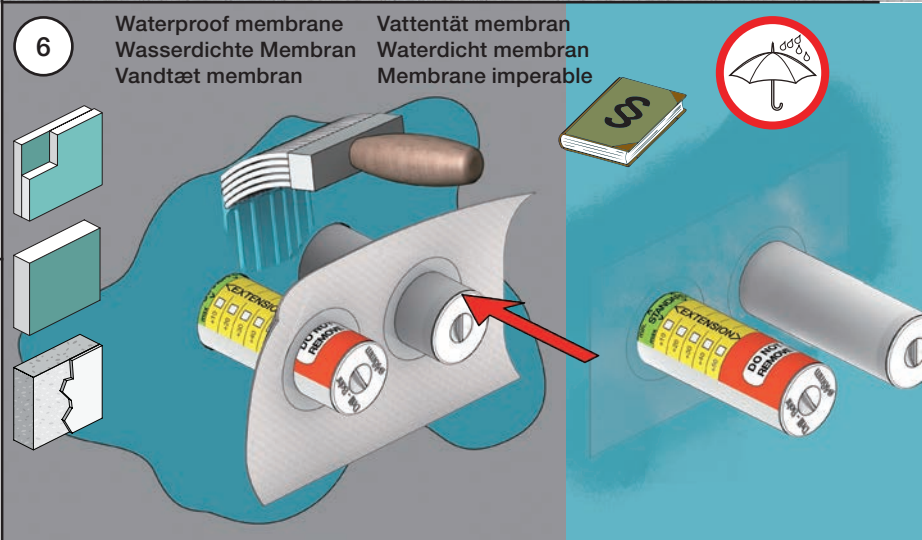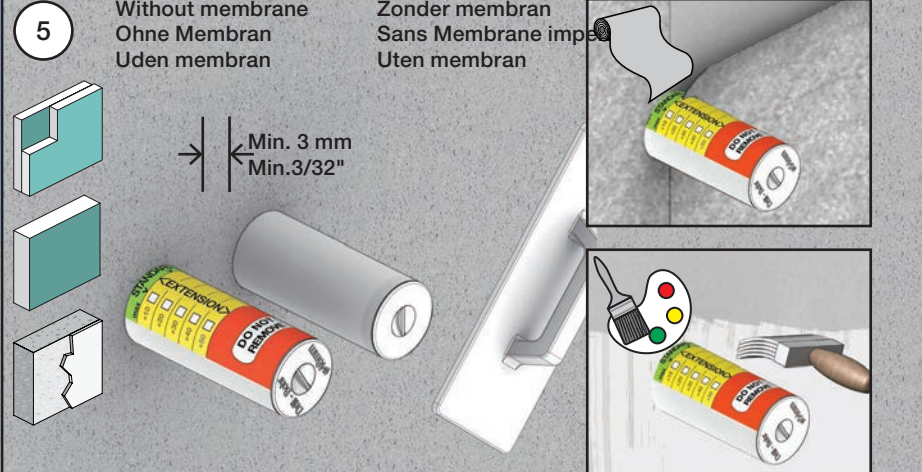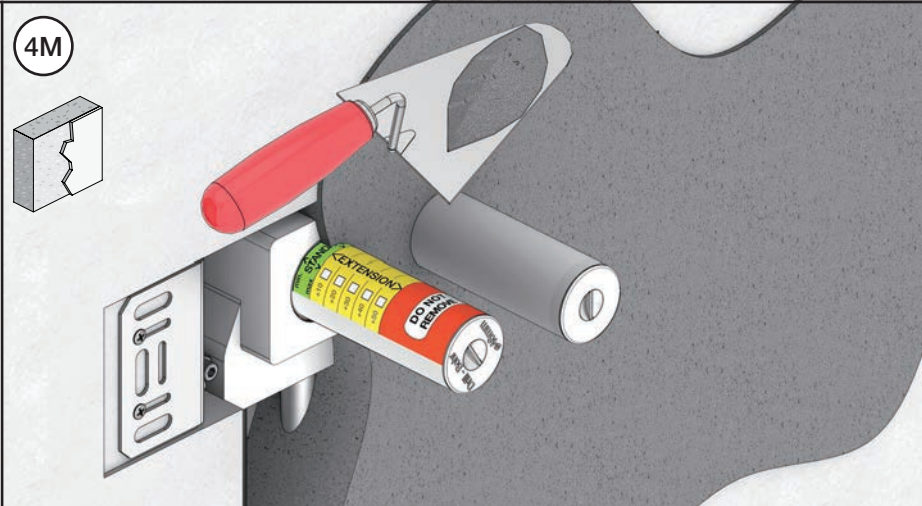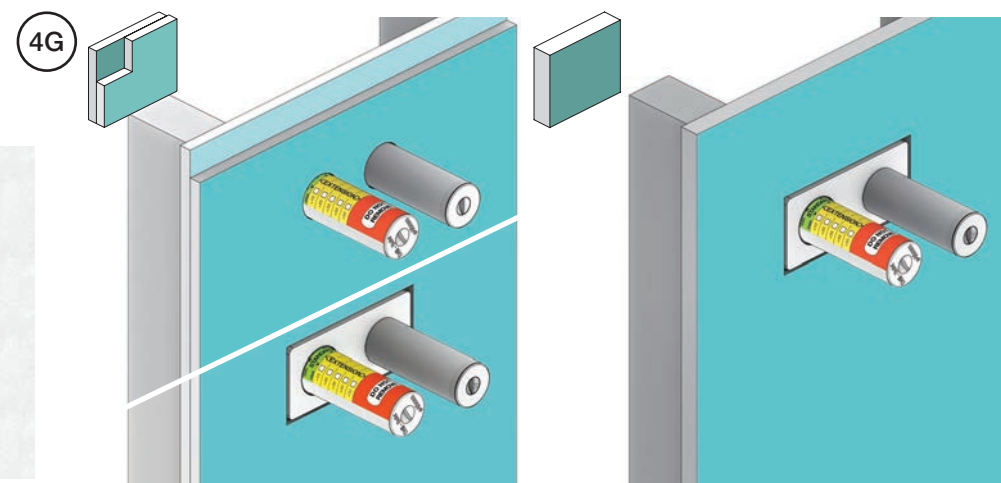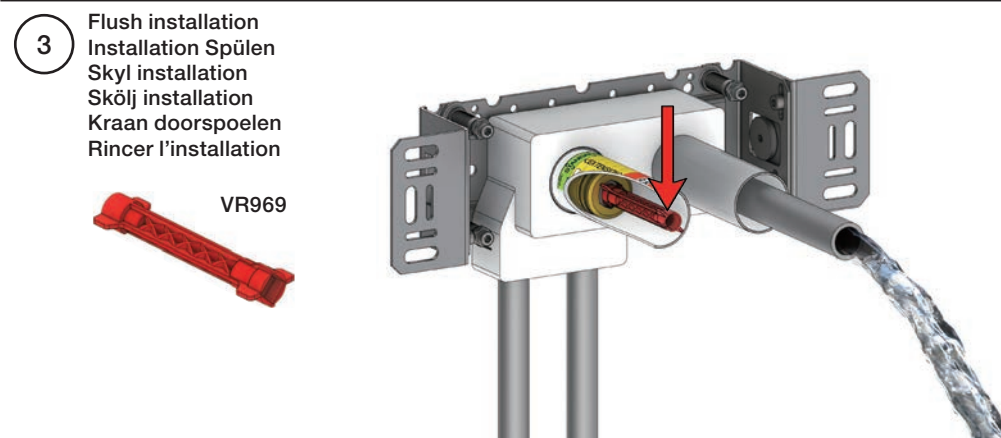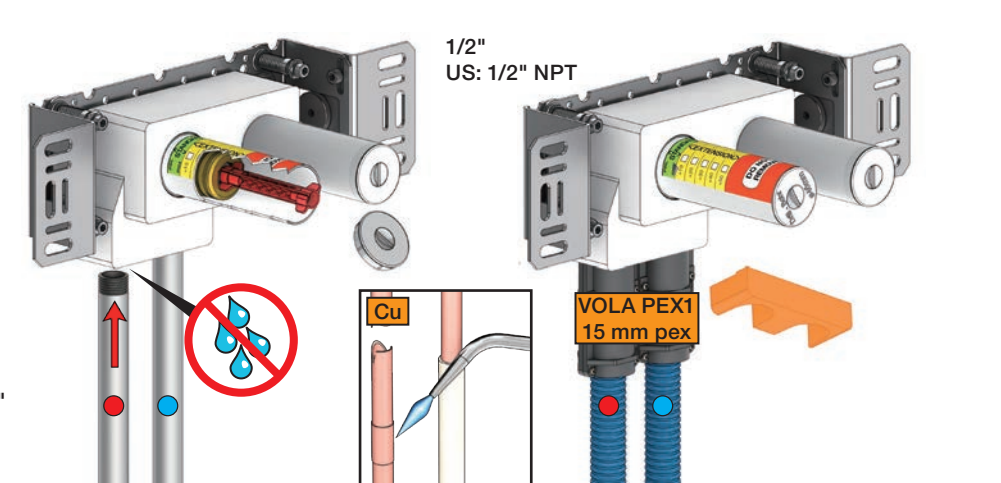



Fitting instruction  
Montageanleitung  
Monteringsvejledning  
Monteringsvægledning  
Montage hanleiding  
Manuel de montage

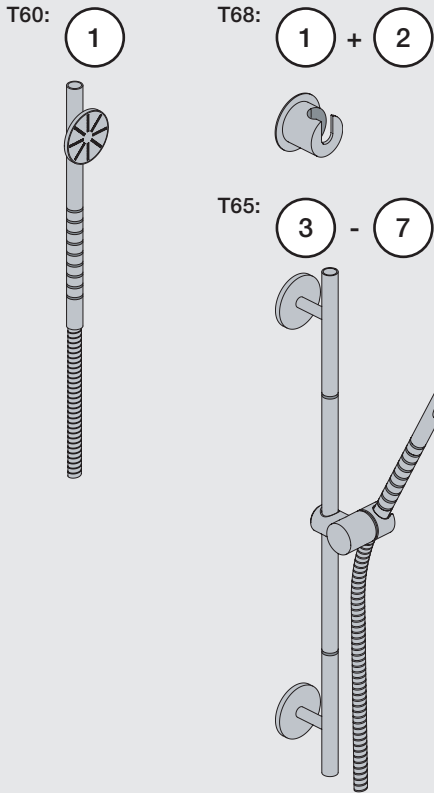

1 T60

28 mm 1 1/8"

55 mm 2 1/8"

Ø17 mm Ø11/16"

290 mm 11 3/8"

1500 mm 5'

G1/2"

Ø60 mm Ø2 3/8"

| Data | Bar:      | 1   | 2   | 3   | 4   | 5   |
|------|-----------|-----|-----|-----|-----|-----|
| T60  | (l/min)   | 6.9 | 9.8 | 12  | 14  | 15  |
|      | (Gal/min) | 1.8 | 2.6 | 3.2 | 3.7 | 4.1 |

Max. 65°C. 150°F

Service - VR556

USA:

Max. flow rate:  
1.6 Gal/min  
6.0 l/min.

2 T68

Ø43 mm Ø1 3/4"

40 mm 1 5/8"

Ø6 mm 1/4"

25 mm 1"

001G

SILICONE

Bathtub  
Badewanne

Badekar  
Badkar

Badkuip  
Baignoire

3 T65

50 mm 2"

55 mm 2 1/8"

Ø60 mm Ø2 3/8"

490 mm 19 1/4"

590 mm 23 1/4"

690 mm 27 1/8"

790 mm 31"

900 mm 35 3/8"

490 mm 19 1/4"

590 mm 23 1/4"

690 mm 27 1/8"

790 mm 31"

900 mm 35 3/8"



600 mm 23 5/8"

700 mm 27 1/2"



800 mm 31 1/2"

900 mm 35 3/8"


4

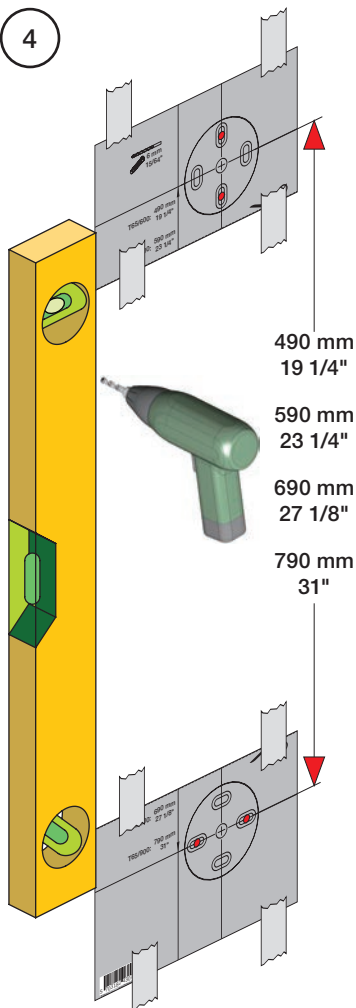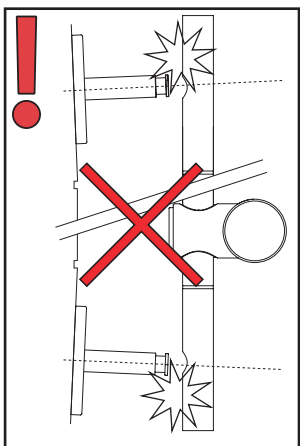490 mm  
19 1/4"590 mm  
23 1/4"690 mm  
27 1/8"790 mm  
31"


5

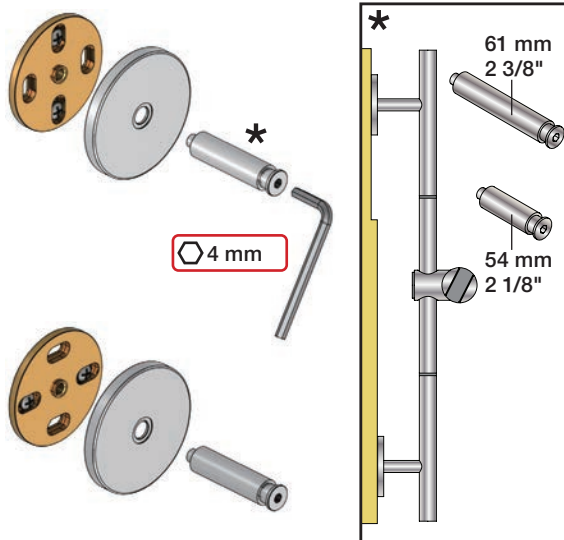Ø6 mm  
Ø15/64"24 - 42 mm  
1" - 1 3/4"Ø54 mm  
Ø2 1/8"


6

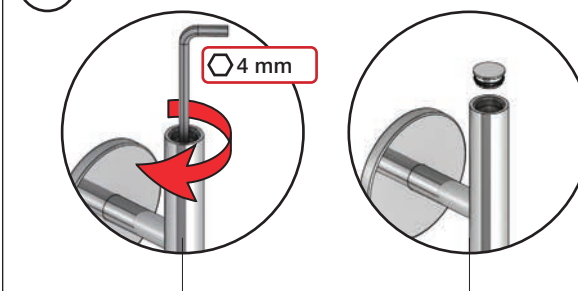

4 mm

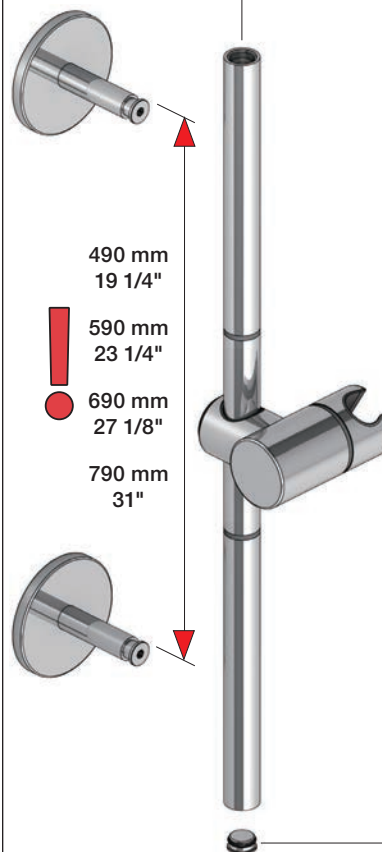490 mm  
19 1/4"590 mm  
23 1/4"690 mm  
27 1/8"790 mm  
31"

Alt.:

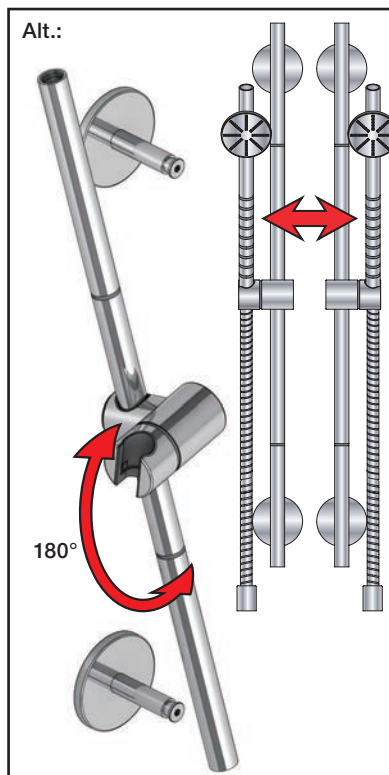

7





8

2 mm





Do not cut the membrane  
 Die Membran nicht schneiden  
 Skær ikke membranen  
 \* Skär inte membranet  
 Snij het membraan niet door  
 Ne coupez pas la membrane  
 No cortar la membrana



\*Membran används inte i SVERIGE,  
 ihop med inbyggboxen.


NR.21:

1

NR.28+19+24:


2

Förlängning  
 Verlängerung  
 Verlængelse  
 Modification



VR2260/VR1400/VR2019


|           |            |      |
|-----------|------------|------|
| Tiles:    | 3 - 15 mm  | Std. |
| Fliesen:  | 15 - 25 mm | +10  |
| Fliser:   | 25 - 35 mm | +20  |
| Tegels:   | 35 - 45 mm | +30  |
| Carreaux: | 45 - 55 mm | +40  |
|           | 55 - 65 mm | +50  |




VR2260/VR1400/VR2019

|  |             |      |
|--|-------------|------|
|  | 35 - 47 mm  | Std. |
|  | 25 - 35 mm  | +10  |
|  | 15 - 25 mm  | +20  |
|  | 5 - 15 mm   | +30  |
|  | -5 - 5 mm   | +40  |
|  | -15 - -5 mm | +50  |

NR 21



NR 21 - 1




VR2279

VR2279B


VR2279C




NR 21 - 2




NR 21 - 3




NR 21 - 4






| VR1260/VR1400/VR2019              |                      |      |
|-----------------------------------|----------------------|------|
| Titles:<br>Fliessen:<br>Fliessen: | Tegels: 3 - 15 mm    | Std. |
|                                   | Carreaux: 15 - 25 mm | +10  |
|                                   | 25 - 35 mm           | +20  |
|                                   | 35 - 45 mm           | +30  |
|                                   | 45 - 55 mm           | +40  |
|                                   | 55 - 65 mm           | +50  |



| VR1260/VR1400/VR2019 |            |      |
|----------------------|------------|------|
|                      | 40 - 52 mm | Std. |
|                      | 30 - 40 mm | +10  |
|                      | 20 - 30 mm | +20  |
|                      | 10 - 20 mm | +30  |
|                      | 0 - 10 mm  | +40  |
|                      | -10 - 0 mm | +50  |
|                      |            |      |


## NR 19/NR24



NR 19:  
Ø40 mm  
Ø1 5/8"

NR 24:  
Ø43 mm  
Ø1 3/4"

## NR 28




## NR 28 - 1

## VR3279

## VR3279B

## NR 28 - 2

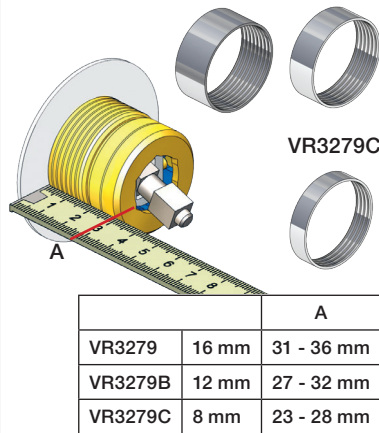


|         | A     |            |
|---------|-------|------------|
| VR3279  | 16 mm | 31 - 36 mm |
| VR3279B | 12 mm | 27 - 32 mm |
| VR3279C | 8 mm  | 23 - 28 mm |

## NR 19 - 1 NR 24 - 1

## VR2204


## VR2204B

## VR2204C

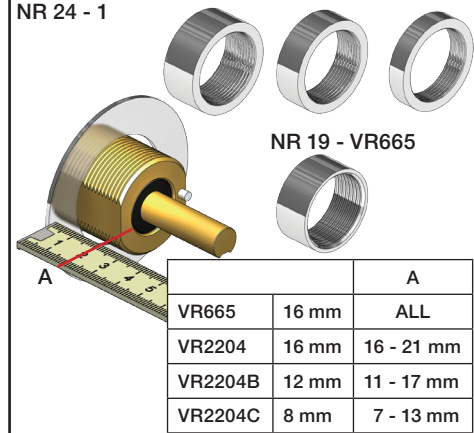


|         | A     |            |
|---------|-------|------------|
| VR665   | 16 mm | ALL        |
| VR2204  | 16 mm | 16 - 21 mm |
| VR2204B | 12 mm | 11 - 17 mm |
| VR2204C | 8 mm  | 7 - 13 mm  |


## NR 28 - 3

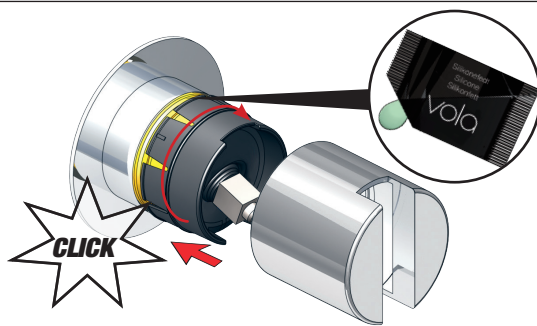

## NR 28 - 4




## NR 19 - 2 NR 24 - 2

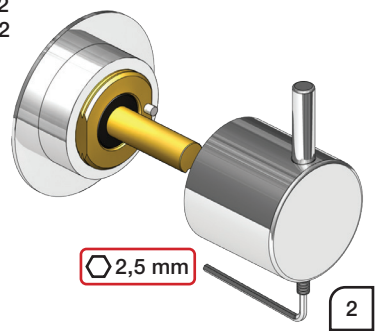




2100

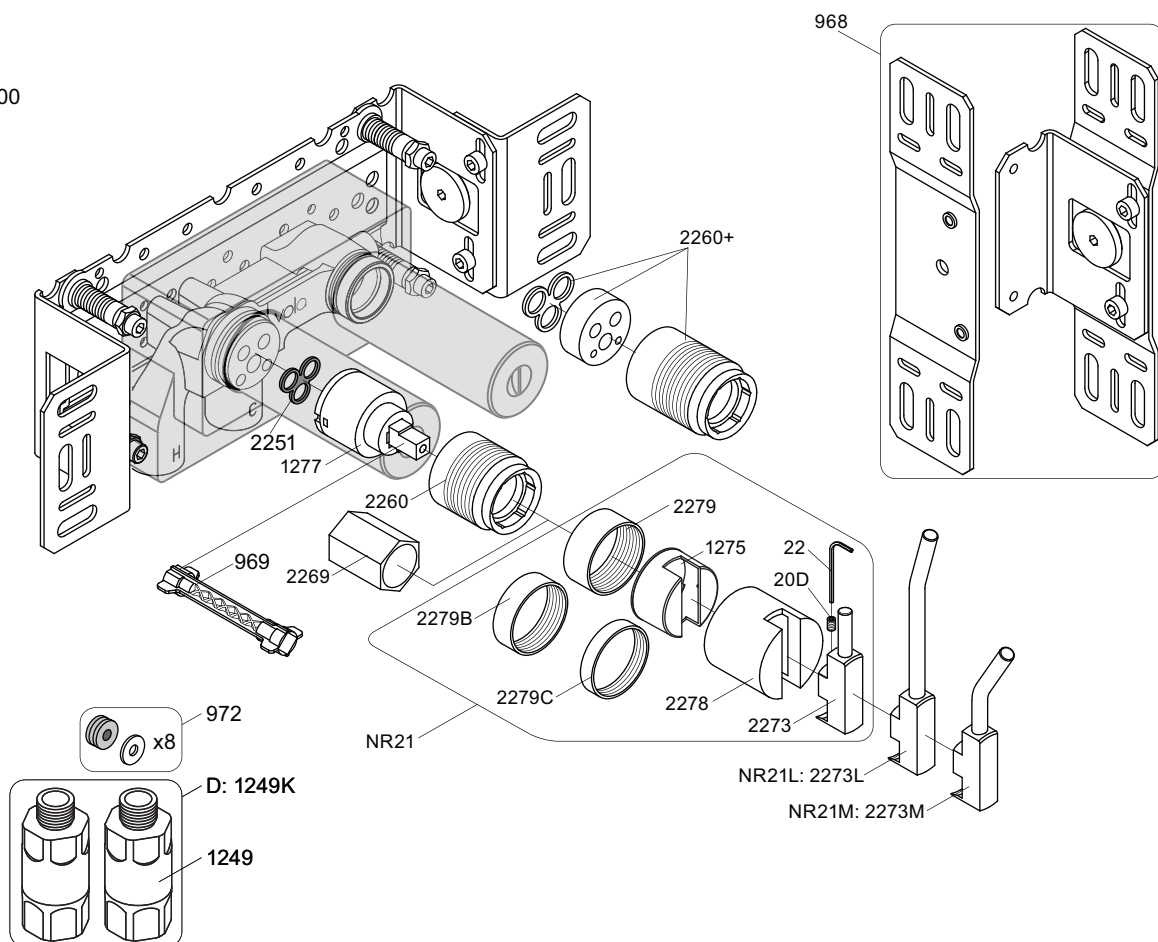


NR21: VR20D, VR22, VR1275, VR2269, VR2273, VR2278, VR2279, VR2279B, VR2279C  
 VR1277K: VR22, VR1277, VR2269


2100





2100X




2200V




2300



2002




2003KB



2003B

-



2002



2001, 001




2001, 001



2001



2001, 001






**vola**  
 Lunavej 2  
 DK-8700 Horsens  
 Tlf : + 45 7023 5500  
 sales@vola.com  
 www.vola.com

**VOLA 2100**  
 2100X, 2200V, 2300


Date  
 May. 22

Rev.  
 4

Sheet  
 SB 10.7

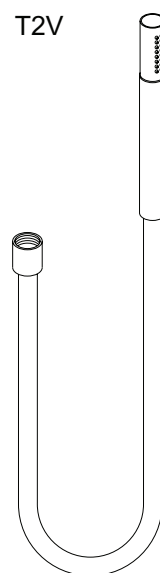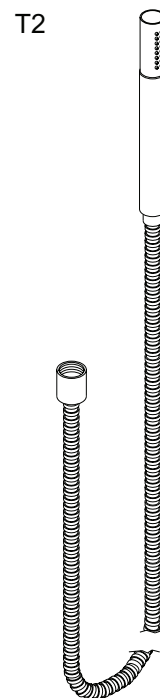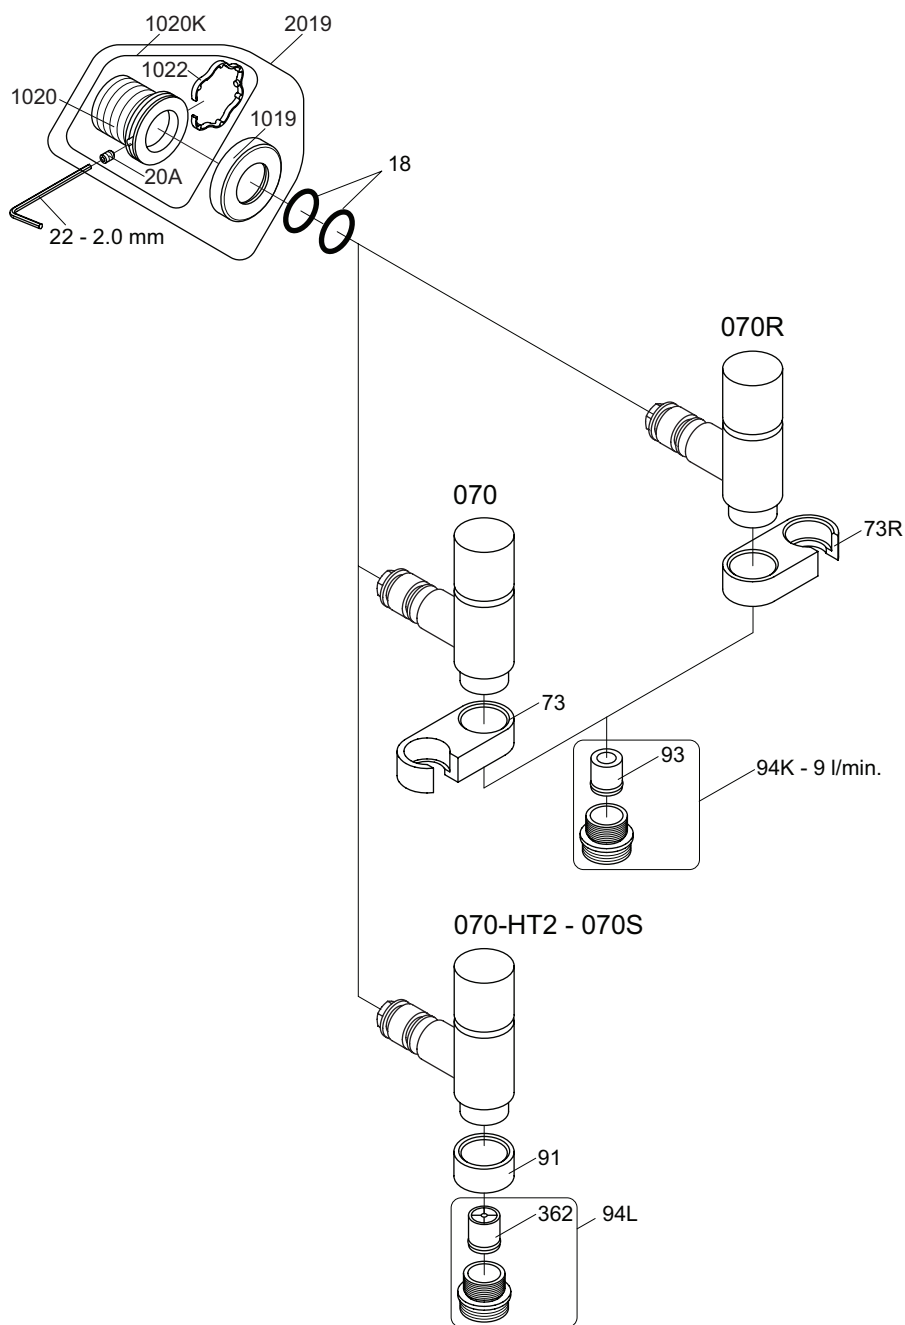

VR1020K: VR20A, VR22, VR1020, VR1022  
 VR2019: VR20A, VR22, VR1019, VR1020, VR1022



**vola**  
 Lunavej 2  
 DK-8700 Horsens  
 Tlf : + 45 7023 5500  
 sales@vola.com  
 www.vola.com

## VOLA 070, 070R 070-HT2

Date  
 Apr. 21

Rev.  
 5

Sheet  
 SB 16