




voilà

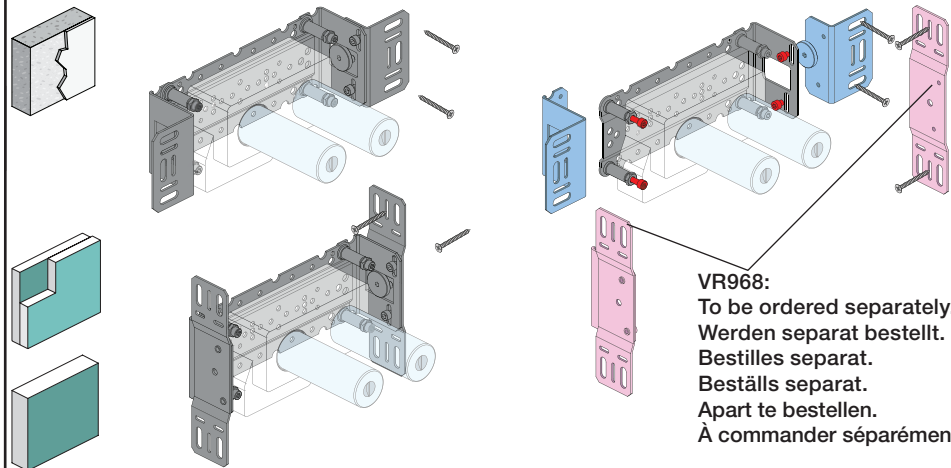

5 705230 287317

[illegible]

VR968:
To be ordered separately.
Werden separat bestellt.
Bestilles separat.
Beställs separat.
Apart te bestellen.
À commander séparément.

Max. 65°C, 150°F

5100/5200V/5300:

5400/5600A3:

5400/5600:  - 

5400/5600A4:  - 

5400 5600	5400A3 5600A3	5400A4 5600A4							
									
Out 2	Out 1	Out 1	32/(8.5)	16/(4.2)	-	-	-	-	-
Out 3	Out 2	Out 2	-		32/(8.5)	16/(4.2)	-	-	-
-	Out 3	Out 3	-	-	-		32/(8.5)	16/(4.2)	-
-	-	Out 4	-	-	-	-	32/(8.5)		

 USA - For use with showerheads rated at 5.7 L/min. (1.5 gpm.) or higher.

 AUS - Hot water inlet:
Max. 50°C, 122°F.
(AS 4032)

**!DO NOT!
!REMOVE!**

  DE:
Bitte separat beiliegende Anleitung für die Schallentkopplung
VR972 beachten

Ingår inte i leveransen, köps separat.
Ikke inkludert, kjøpes separat.
Eivät sisälly tilaukseen, ostettava erikseen.

200M

PEX1

Y Min. 48 mm
Max. 110 mm

A diagram of a standard extension cord. The cord is divided into three main sections: a blue section on the left labeled "STANDARD", a yellow section in the middle labeled "EXTENSION", and a red section on the right labeled "DO NOT REMOVE". The yellow section is further divided into five segments, each labeled with a number: +10, +20, +30, +40, and +50. A dimension line above the yellow section is labeled "Y". Below the cord is a ruler showing inches from 1 to 10.

	T	Y	VR5250/VR5410/VR2019
	3 - 15 mm	110 - 98 mm	Std.
	15 - 25 mm	98 - 88 mm	+10
	25 - 35 mm	88 - 78 mm	+20
	35 - 45 mm	78 - 68 mm	+30
	45 - 55 mm	68 - 58 mm	+40
	55 - 65 mm	58 - 48 mm	+50

Montering af forlængerdele
Montering av förlängning

VR5250



An exploded view diagram of a water filter assembly. The components shown include a blue filter housing, a white pleated filter cartridge, a grey O-ring, a brass fitting, a brass nut, a brass elbow, a brass cap, a brass plug, a brass pin, and a brass screw. Red arrows point to the brass fitting, brass nut, brass elbow, brass cap, brass plug, and brass pin, indicating they should be recycled. Green recycling symbols are placed next to the brass fitting, brass nut, and brass elbow.

X₅₂ - 0 mm

X_{-15 - 0 mm}

	X	VR5250/VR5410/VR2019
	37 - 49 mm	Std.
	27 - 37 mm	+10
	17 - 27 mm	+20
	7 - 17 mm	+30
	-3 - 7 mm	+40
	-13 - -3 mm	+50

Montage van de verlengstukken		
Montage des rallonges		

VR2019+. VR2119+

VR5410

A yellow, cylindrical component with a hexagonal base and a central threaded hole, likely a valve or connector.

5400:
5600:

5400A	
5600A	

5400/5600:


5400A3/ 5600A3: 5400A4:

5600A4:

VR5411


32 mm

14 mm

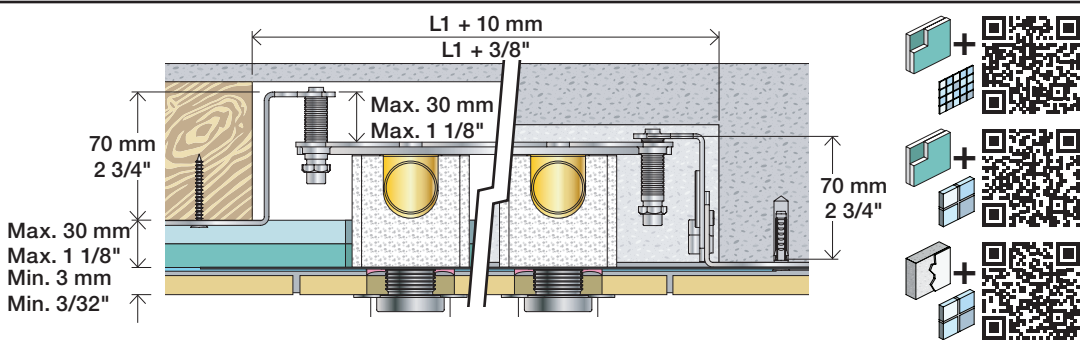

2x13 mm Lightweight wall
Leichtwand
Let væg

Lätta konstruktion
Holle wandconstructie
Construction légère

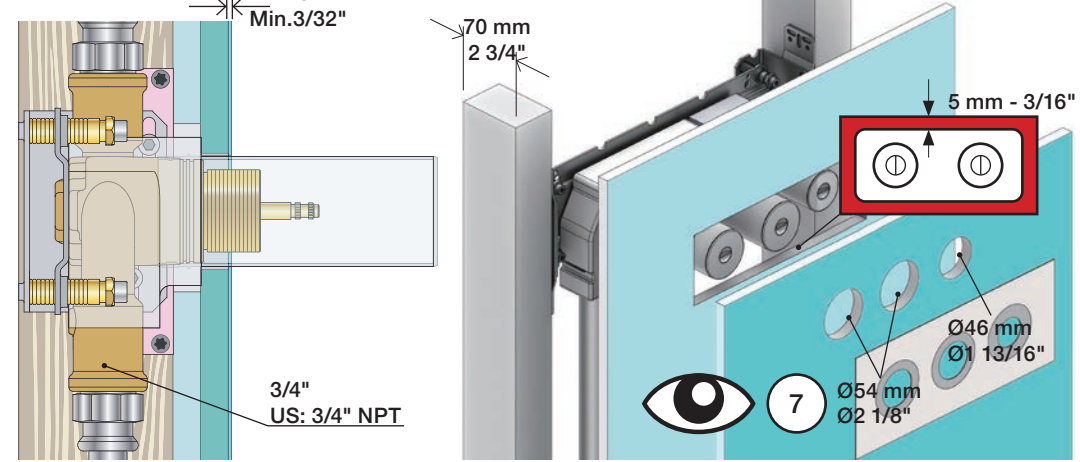

1x15 mm
1x18 mm
1x20 mm

Lightweight wall
Leichtwand
Let væg


Lätta konstruktion
Holle wandconstructie
Construction légère

2x13 mm



Masonry
Mauerwerk
Murværk

Murverk
Massieve wand
Mur Plein







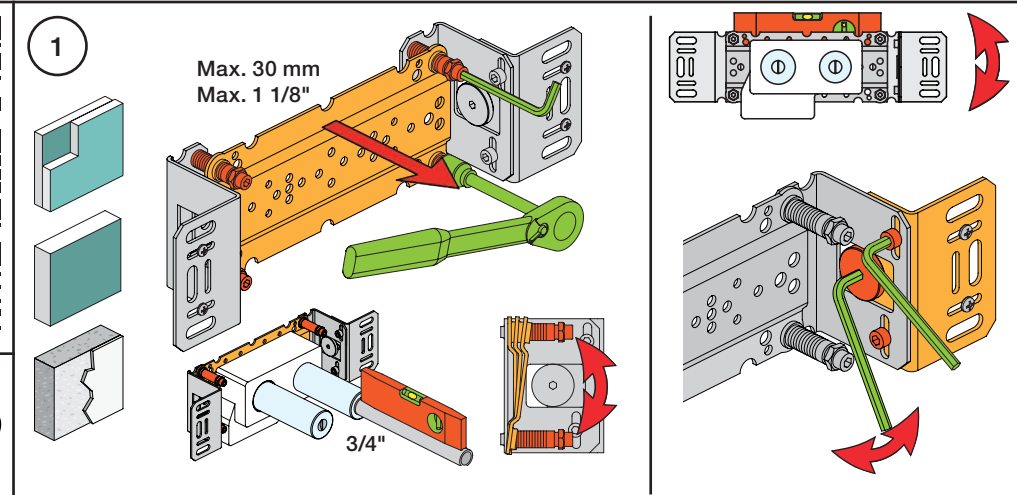


2

Test Pressure
Prüfdruck
testtryk
Test tryck
Test druk
test de pression

Check the local legislation.
Bitte die örtlichen Vorschriften überprüfen.
Tjek de lokale regler.
Kontrollera lokala föreskrifter.
Nazitten lokale regelgeving.
Vérifiez la législation locale.

! Water - Wasser - Vand - Vatten - Water - L'eau
! MAX 1 Minute - Minut - Minuut !

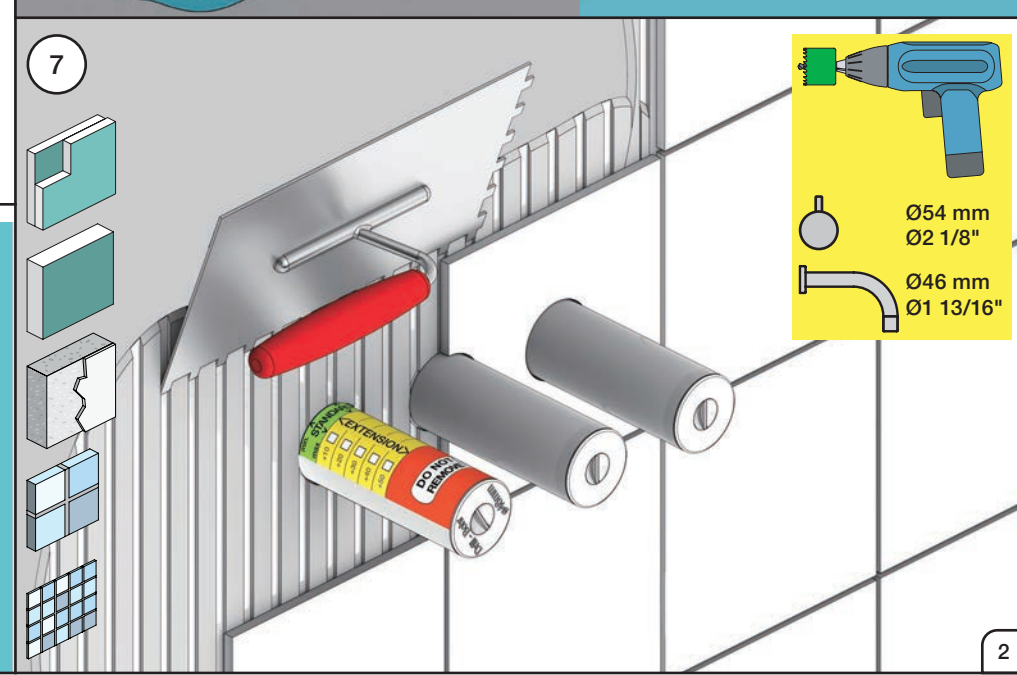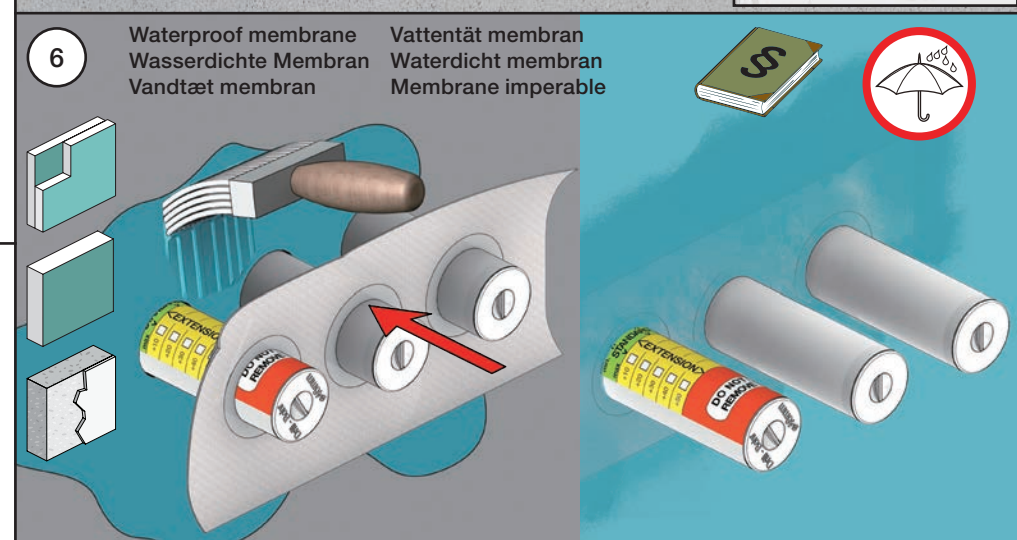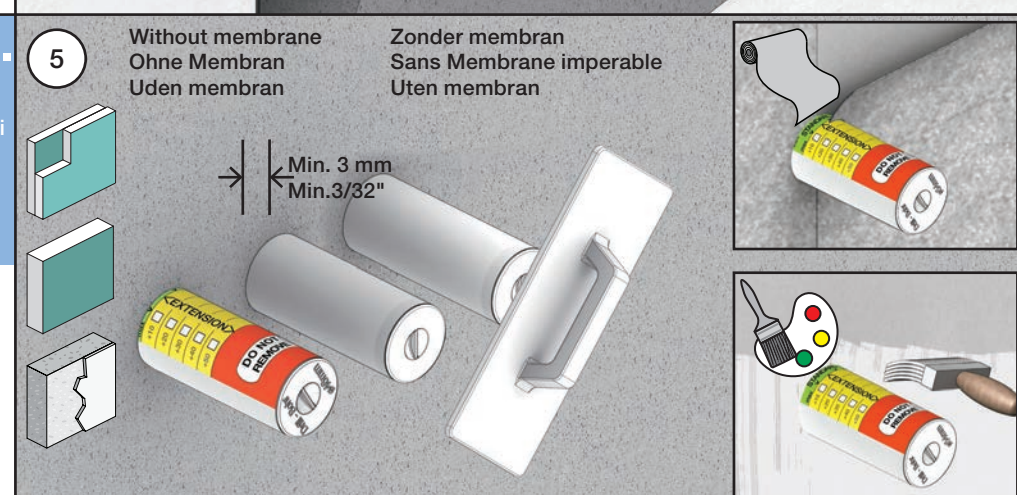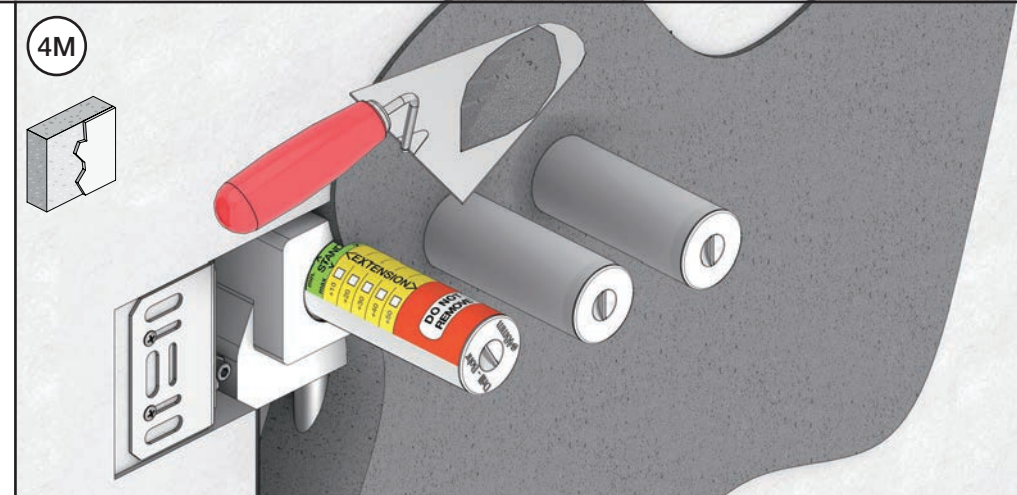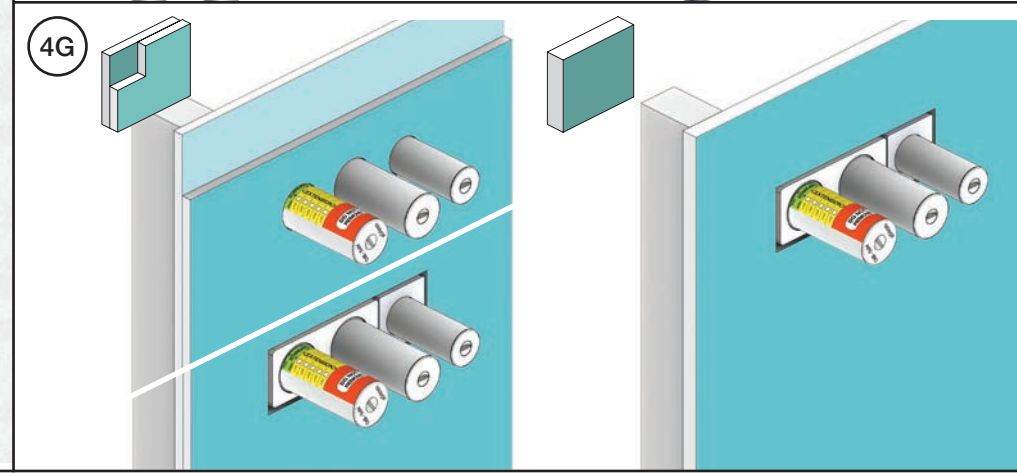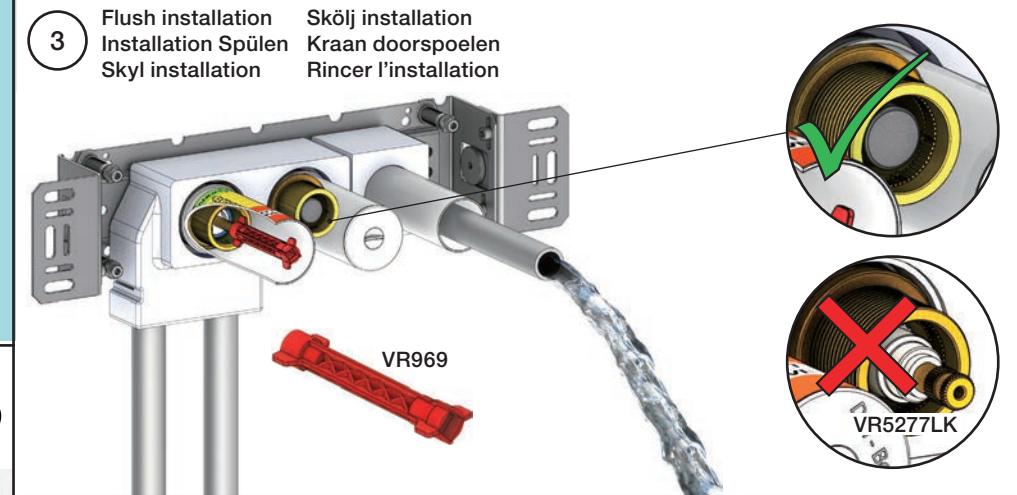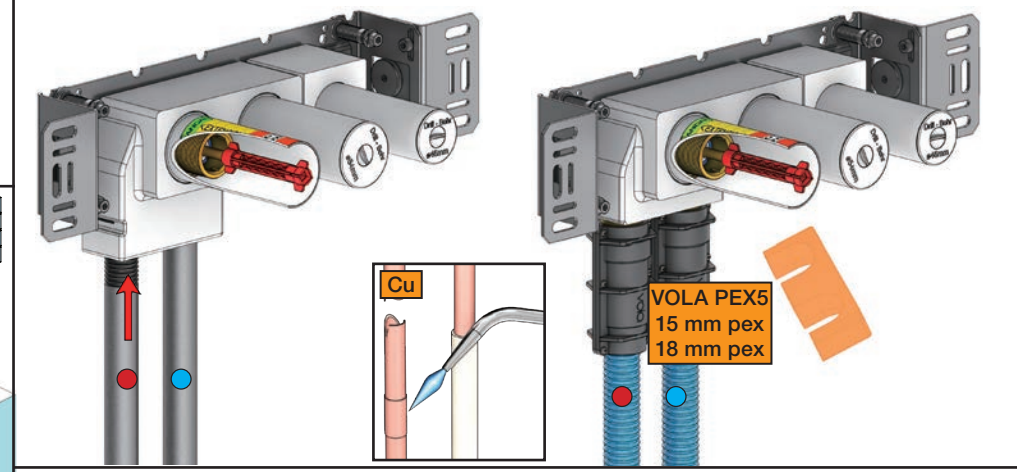

VOLA 010, 020, 030, 040
VOLA 010C, 020C, 040D

Fitting instruction
 Montageanleitung
 Monteringsvejledning
 Monteringsvægledning
 Montage hanleiding
 Manuel de montage



04/00026
 04/00101
 04/00175
 04/00298

010, 020

010C, 020C

030

040

040D

www.vola.com

mnt_010_V1_40998360
 02-10-2023



5 705230 341750

Standard Flow data:		Max.
010/020	(l/min)	5.0
	(Gal/min)	1.3
010C/020C	(l/min)	30
	(Gal/min)	7.9
030	(l/min)	9.0
	(Gal/min)	2.0
040	(l/min)	25
	(Gal/min)	6.6
040D	(l/min)	30
	(Gal/min)	7.9
		Max. 65°C. Max. 150°F



VR161:

VR161K: 7 l/min - 1.8 Gal/min

VR161D: 9 l/min - 2.5 Gal/min

VR161F: 14 l/min - 3.7 Gal/min




VR161K



VR161D



VR161F




For more water saving possibilities please see:
 Weitere Wassersparmöglichkeiten finden Sie auf:
 For flere vandbesparende muligheder se venligst:
 För mer vattenbesparande möjligheter hänvisas till:
 Voor meer waterbesparende mogelijkheden zie:
 Pour plus d'informations sur les options : économie d'eau, voir le site:


www.vola.com





010, 020

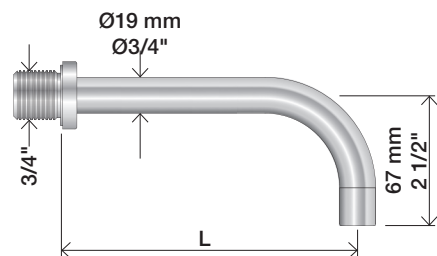


010C, 020C

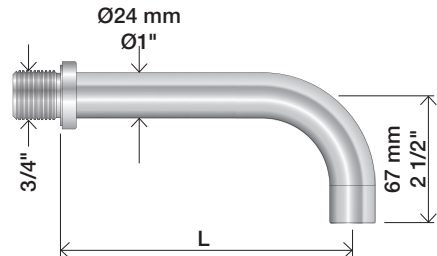



030

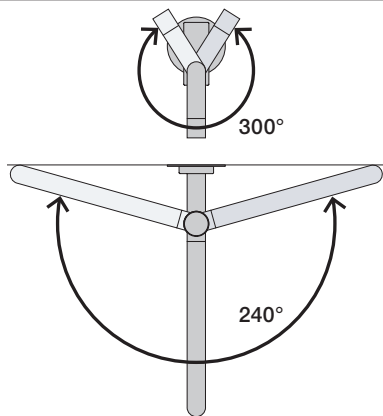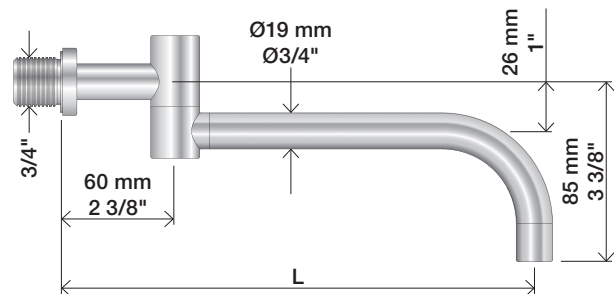

040

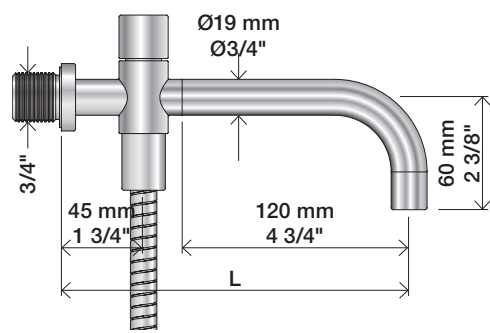

040D

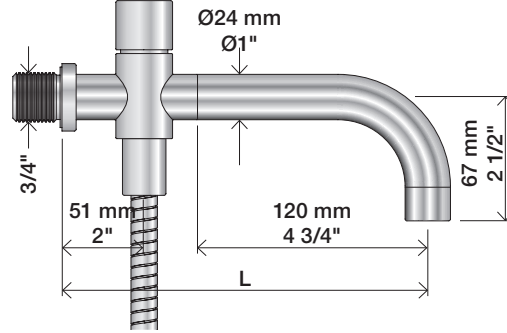


	L (mm)	L (Inch)
010(C)/100	100	4"
010(C)/130	130	5"
010(C)/160	160	6"
020(C)/200	200	7 3/4"
020(C)/225	225	8 3/4"
020(C)/260	260	10 1/4"
020(C)/300	300	11 3/4"

	L (mm)	L (Inch)
030/200	200	7 3/4"
030/250	250	9 3/4"
030/300	300	11 3/4"
030/350	350	13 3/4"

	L (mm)	L (Inch)
040	185	7 3/4"
040D	200	7 3/4"
040D/250	250	9 3/4"
040D/300	300	11 3/4"

1

010, 010C, 020, 020C, 030, 040, 040D

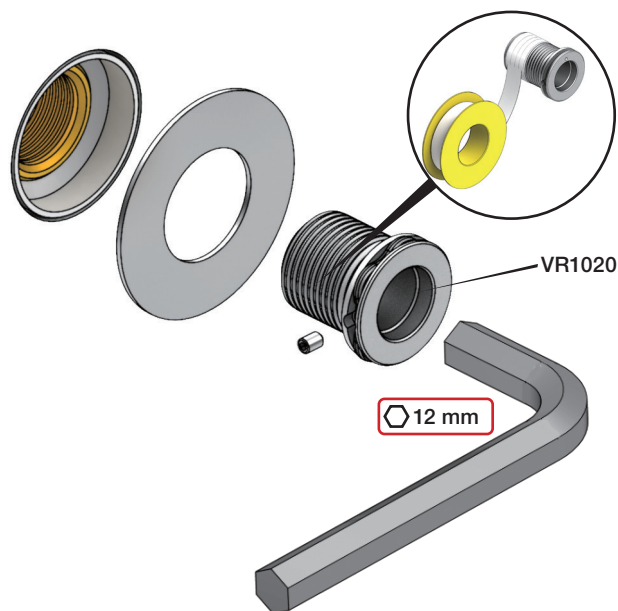

2






3

Ø19: 010, 020, 030, 040




Ø24: 010C, 020C, 040D

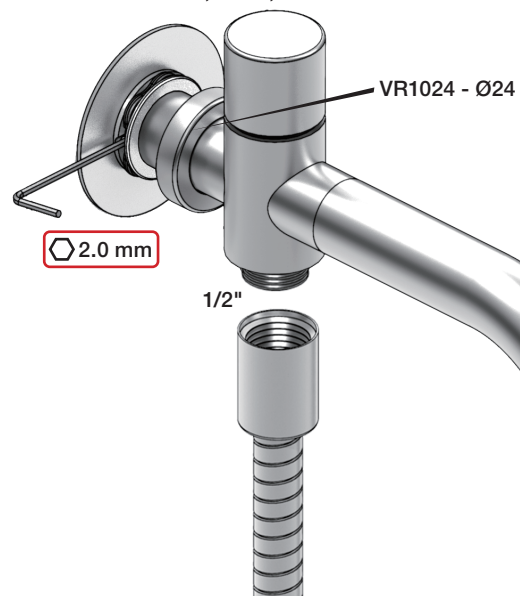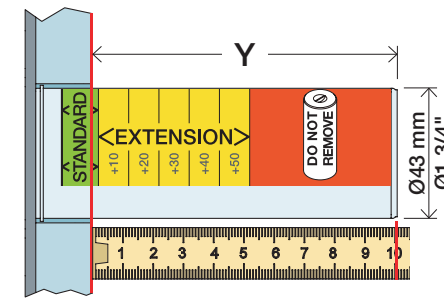Extension
VerlängerungForlængerdele
FörlängningVerlængstücken
ModificationT Min. 3 mm
Max. 65 mmY Min. 48 mm
Max. 110 mm

T	Y	VR2019 (Ø19) VR2119 (Ø24)
3 - 15 mm	110 - 98 mm	Std.
15 - 25 mm	98 - 88 mm	+10
25 - 35 mm	88 - 78 mm	+20
35 - 45 mm	78 - 68 mm	+30
45 - 55 mm	68 - 58 mm	+40
55 - 65 mm	58 - 48 mm	+50

VR2019+/VR2219+

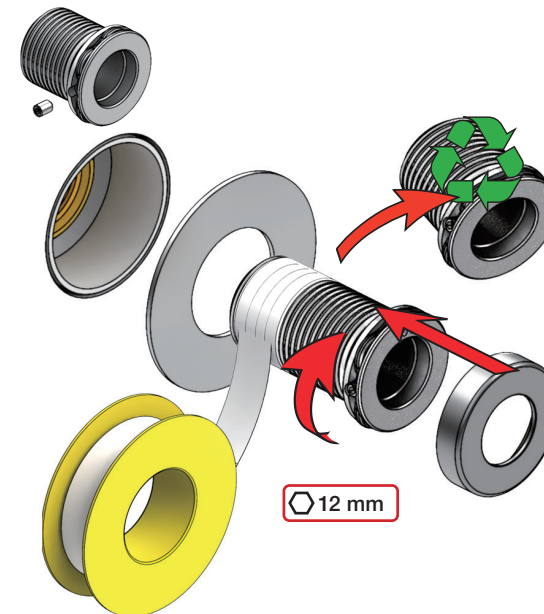



NR.51:

1


NR.52+64:

2


Do not cut the membrane
Die Membran nicht schneiden
Skær ikke membranen
Skär inte membranet
Snij het membraan niet door
Ne coupez pas la membrane
No cortar la membrana

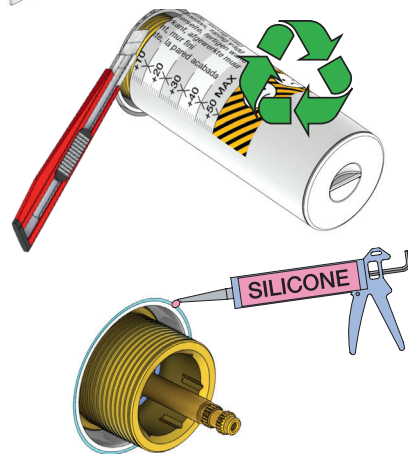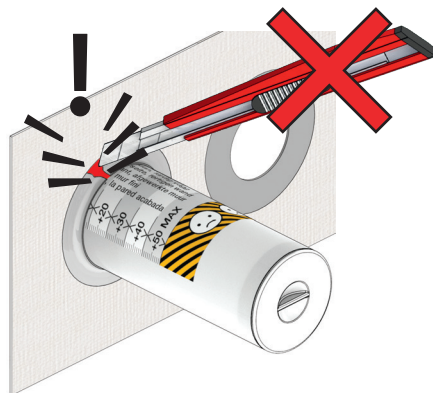

NR 51




NR 51 - 1



VR2279


VR2279B

VR2279C




		A
VR2279	16 mm	16 - 22 mm
VR2279B	12 mm	12 - 18 mm
VR2279C	8 mm	8 - 15 mm


NR 51 - 2

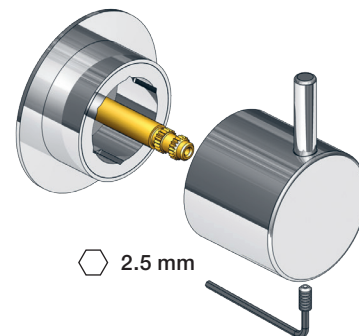


NR 52



NR 52 - 1




NR 52 - 2

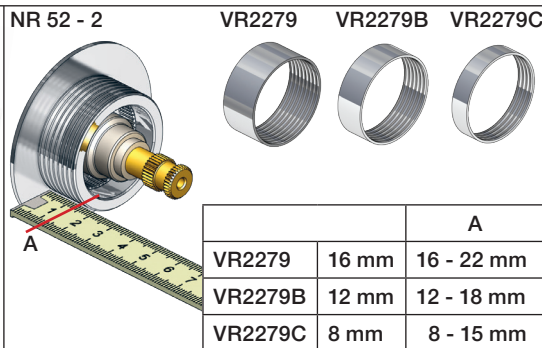


NR 52 - 3


Anti scald settings
Verbrühschutz
Skoldningssikring
Skållnings skydd
Broeien verzekeringen
Prévention des brûlures

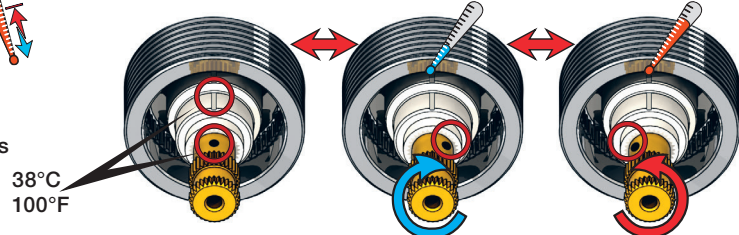


NR 52 - 4

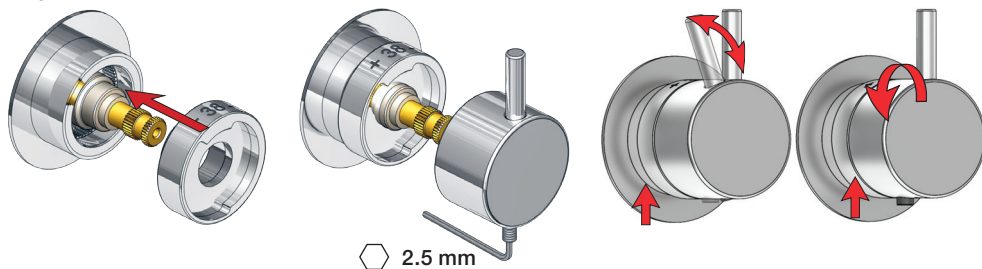


NR 64




NR 64 - 1

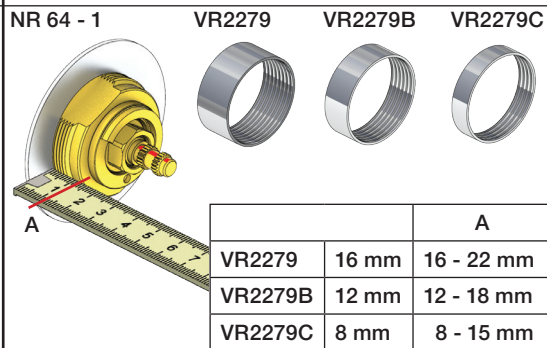

NR 64 - 2

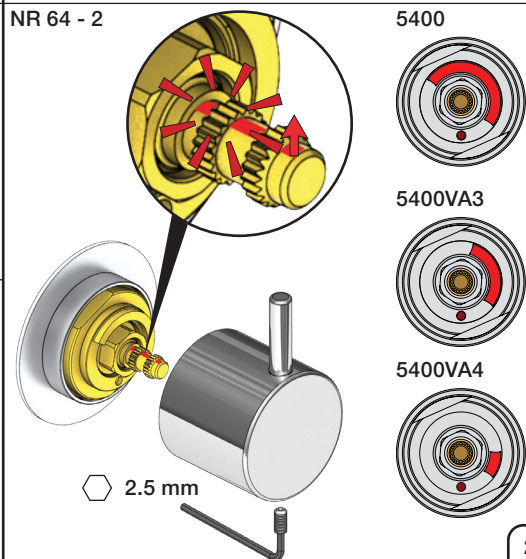

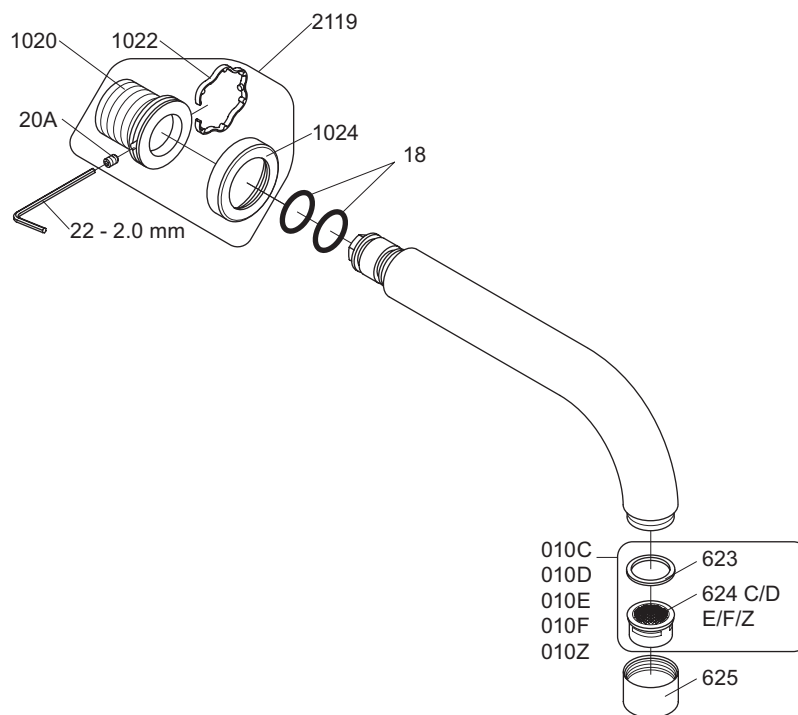

VR010C: VR623, VR624C
 VR010D: VR623, VR624D
 VR010E: VR623, VR624E
 VR010F: VR623, VR624F
 VR010Z: VR623, VR624Z
 VR1020K: VR20A, VR22, VR1020, VR1022
 VR2119: VR20A, VR22, VR1020, VR1022, VR1024



vola
 Lunavej 2
 DK-8700 Horsens
 Tlf : + 45 7023 5500
 sales@vola.com
 www.vola.com



VOLA 010C/020C

Date
Apr. 21

Rev.
2

Sheet
SB 11.1

5100

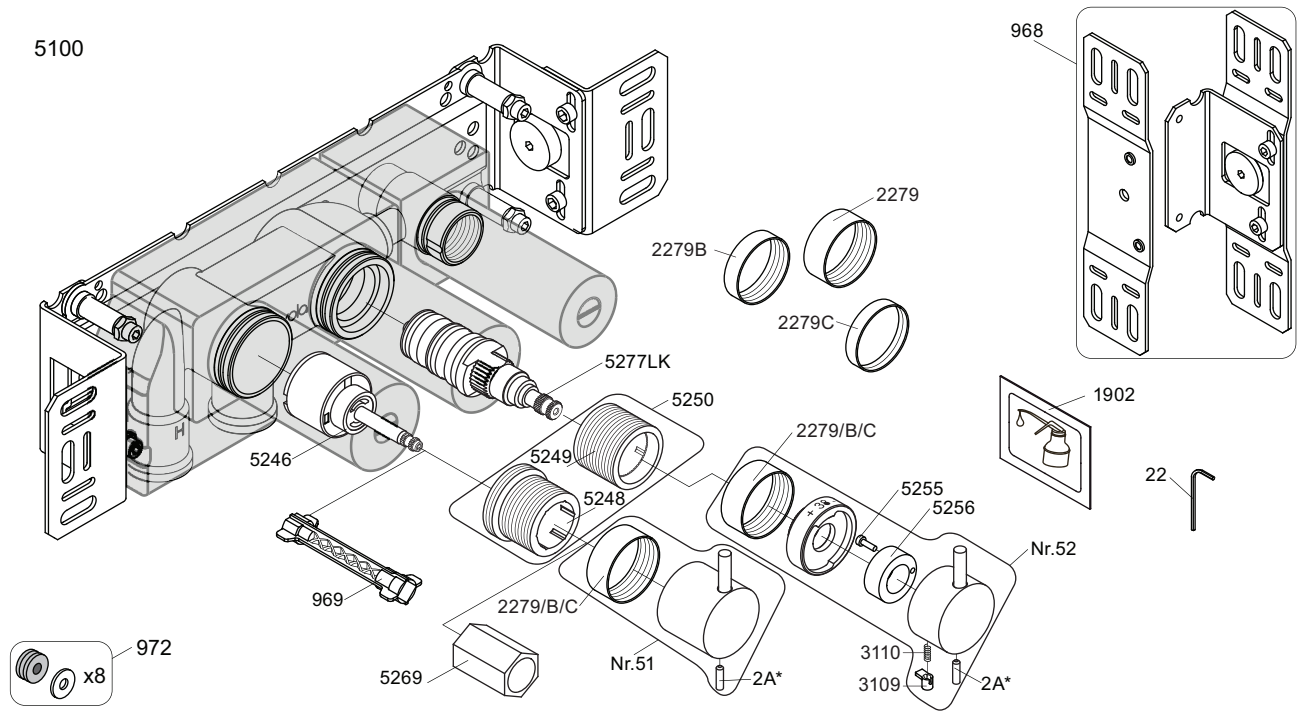


2A*  Color



VR2A-Steel: Standard
VR2A-F60: F17-F27-F60
VR2A-F63: F63-F64
VR2A-F65: F19-F65-F70

NR51: VR5251, VR2279+B+C, VR2A
NR52: VR2A, VR5252, VR5253, VR5255, VR5256, VR2279+B+C, VR3113, VR2A
VR3113: VR3109, VR3110, VR5255
VR5250+: VR5248+, VR5249+, VR5257, VR5258, VR5259, VR5260
VR5257+: VR5257+, VR5259+
VR5258+: VR5258+, VR5260+

5100/5100X/5300

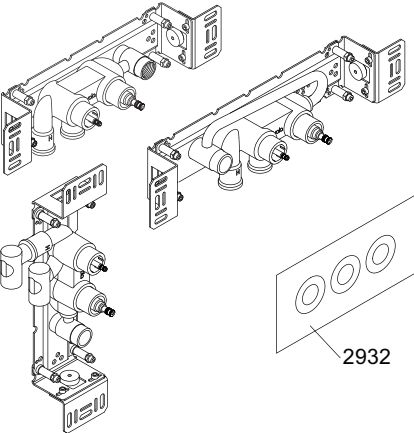

5200V

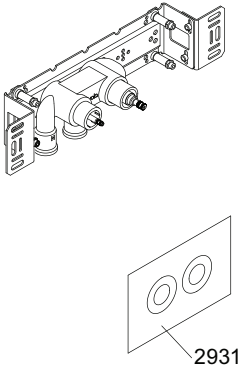

5003K



5002



2x2001, 001



2x2001



vola
Lunavej 2
DK-8700 Horsens
Tlf : + 45 7023 5500
sales@vola.com
www.vola.com

VOLA 5100
5100X, 5200V, 5300

Date
May 22

Rev.
4

Sheet
SB 10.51