

Fitting instruction
Montageanleitung
Monteringsvejledning
Monteringsvægledning
Montage hanleiding
Manuel de montage



T60:



T68:



T65:



1

T60

28 mm
1 1/8"

55 mm
2 1/8"

Ø17 mm
Ø11/16"

290 mm
11 3/8"

1500 mm
5'

G1/2"

28 mm
1 1/8"

Ø60 mm
Ø2 3/8"

Data	Bar:	1	2	3	4	5
T60	(l/min) (Gal/min)	6.9 1.8	9.8 2.6	12 3.2	14 3.7	15 4.1
	Max. 65°C. 150°F					

Service - VR556

USA: Max. flow rate:
1.6 Gal/min
6.0 l/min.

3

T65

50 mm
2"

55 mm
2 1/8"

Ø60 mm
Ø2 3/8"

50 mm
2"

Bathtub
Badewanne

Badekar
Badkar

Badkuip
Baignoire

2

T68

Ø43 mm
Ø1 3/4"

40 mm
1 5/8"

Ø6 mm
1/4"

25 mm
1"

001G

40 mm
1 5/8"

Min. 200 mm
Min. 8"

070

Min. 350 mm
Min. 14"

T68

790 mm
31"

690 mm
27 1/8"

590 mm
23 1/4"

490 mm
19 1/4"

900 mm
35 3/8"

800 mm
31 1/2"

700 mm
27 1/2"

600 mm
23 5/8"

1

T8 → T68

3

T65

50 mm
2"

55 mm
2 1/8"

Ø60 mm
Ø2 3/8"

50 mm
2"

790 mm
31"

690 mm
27 1/8"

590 mm
23 1/4"

490 mm
19 1/4"

900 mm
35 3/8"

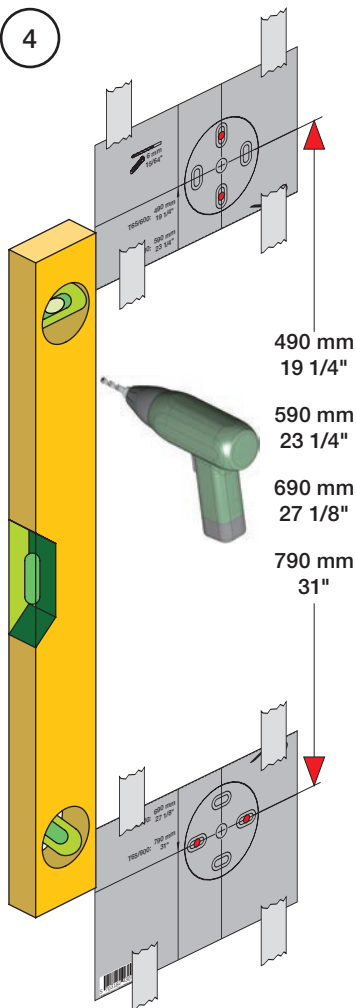
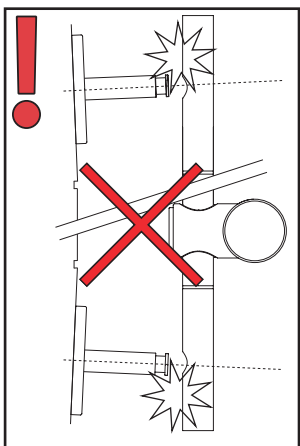
800 mm
31 1/2"

700 mm
27 1/2"


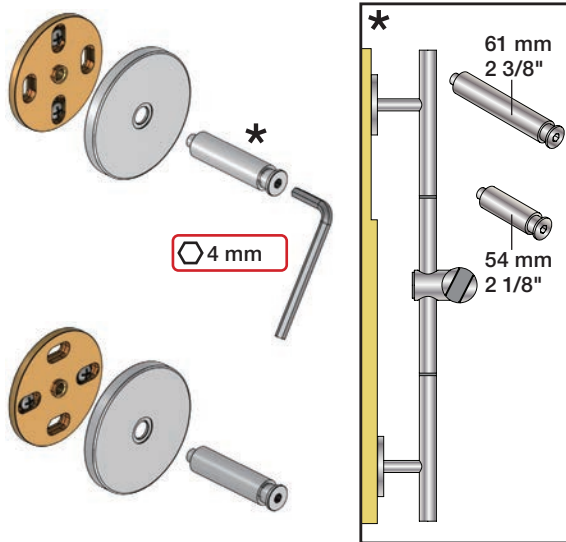
600 mm
23 5/8"

1

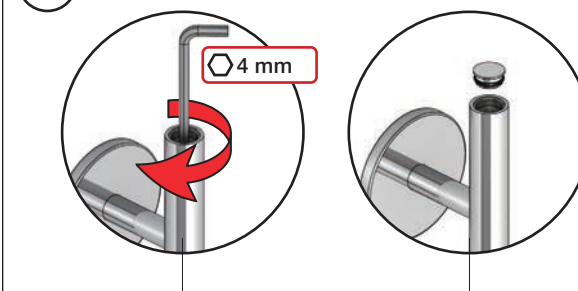
4

490 mm
19 1/4"590 mm
23 1/4"690 mm
27 1/8"790 mm
31"

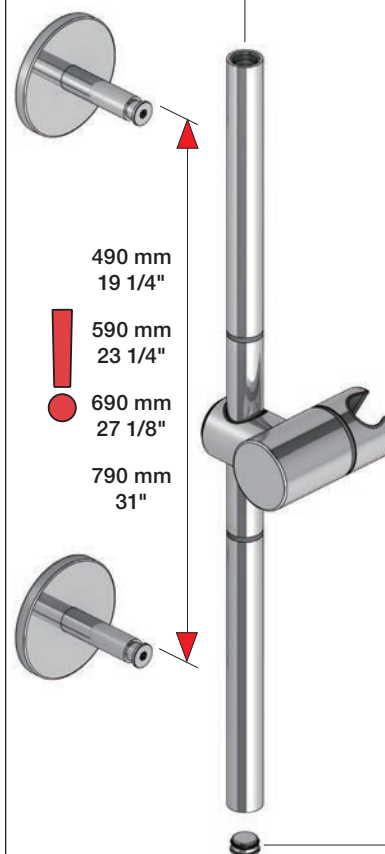
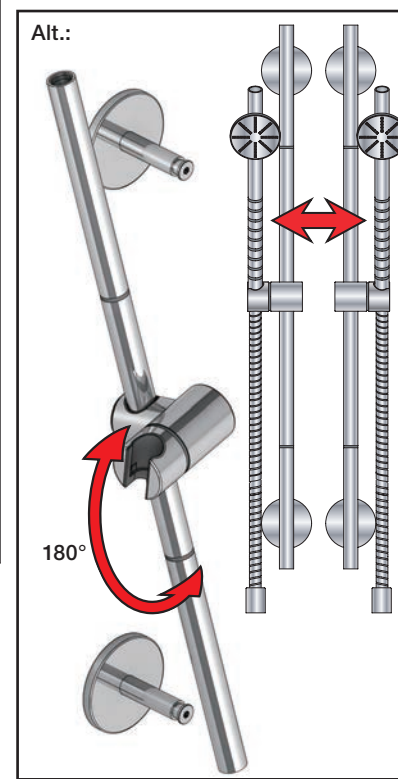
5

Ø6 mm
Ø15/64"24 - 42 mm
1" - 1 3/4"Ø54 mm
Ø2 1/8"

6



4 mm

490 mm
19 1/4"590 mm
23 1/4"690 mm
27 1/8"790 mm
31"

Alt.: 180°

7



8



2 mm

