


VOLA 5100, 5100X, 5200V, 5300
VOLA 5400DV, 5400V, 5400NV & A3/A4
VOLA 5400TV, 5400FV, 5400RV & A3/A4
VOLA 5600V & A3/A4



Fitting instruction
Montageanleitung
Monteringsvejledning



Monteringsv gledning
Montage hanleiding
Manuel de montage

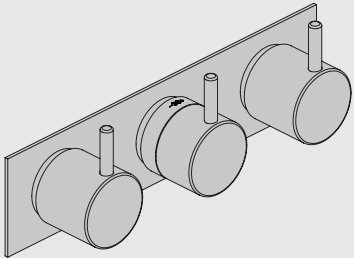

www.vola.com
5000_V4_40998504
04-01-2023

5 705230 287317

	L	L1	L2	H	H1	D
5400DV	377 mm 14 3/4"	260 mm 10"	268 mm 10"	95 mm 3 3/4"	186mm 7 3/8"	70 mm 2 3/4"
5100, 5200V, 5300, 5400V, 5600V	475 mm 19 3/4"	355 mm 14"	367 mm 14 1/2"			
5100X, 5400NV, 5400TV	552 mm 21 3/4"	435 mm 17"	447 mm 17 5/8"			
5400FV, 5400RV	630 mm 25 1/2"	514 mm 20 3/8"	522 mm 20 1/2"			

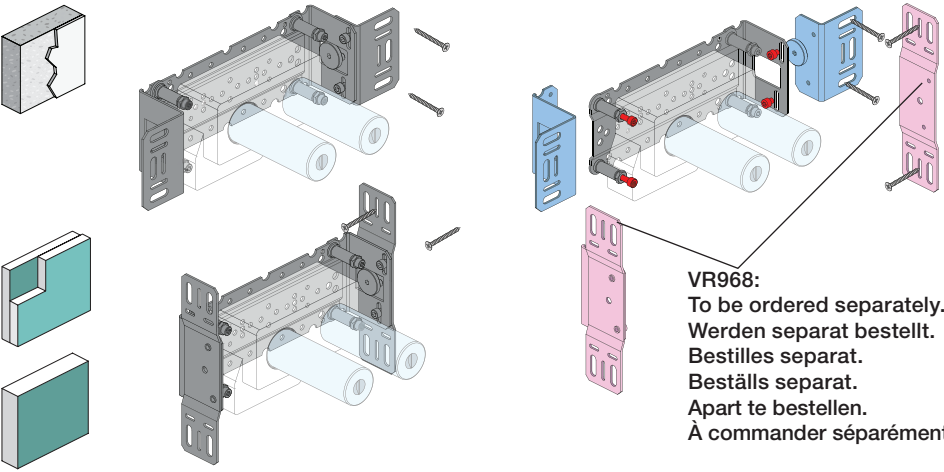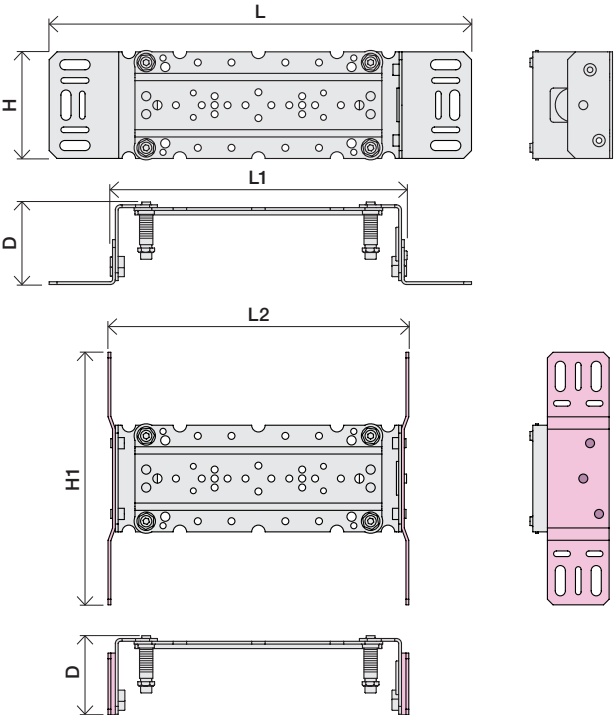

VR968:
To be ordered separately.
Werden separat bestellt.
Bestilles separat.
Apart te bestellen.
  commander s par ment.

A Max.: 10 Bar/145 psi
Max. 65 C, 150 F

USA - For use with showerheads rated at 5.7 L/min. (1.5 gpm.) or higher.

AUS - Hot water inlet: Max. 50 C, 122 F. (AS 4032)

Data, l/min. / (Gpm) 3 Bar/43.5 Psi:

5100/5200V/5300: **A** 5400/5600A3: **A** - **C**

5400/5600: **A** - **B** 5400/5600A4: **A** - **D**

5400 5600	5400A3 5600A3	5400A4 5600A4							
			A	M	B	M	C	M	D
Out 2	Out 1	Out 1	32/(8.5)	16/(4.2)	-	-	-	-	-
Out 3	Out 2	Out 2	-	-	32/(8.5)	16/(4.2)	-	-	-
-	Out 3	Out 3	-	-	-	-	32/(8.5)	16/(4.2)	-
-	-	Out 4	-	-	-	-	-	-	32/(8.5)

B Check the local legislation.
Bitte die  rtlichen Vorschriften  berpr fen.
Tjek de lokale regler.
Kontrollera lokala f reskrifter
Nazitten lokale regelgeving.
V rifiez la l gislation locale.

**!DO NOT!
!REMOVE!**

C DE:
Bitte separat beiliegende Anleitung f r die Schallentkopplung VR972 beachten

D

Box till inbyggnadsblandare.
Boks til indbygningsblander.
Laatikko sein asenteiselle sekoittajalle.

Ing r inte i leveransen, k ps separat.
Ikke inkludert, k pes separat.
Eiv t sis lly tilaukseen, ostettava erikseen.

200M
PEX1

Extension
Verl ngerung
Forl ngerdele
F rl ngning
Aanpassing
Modification

T Min. 3 mm
Max 65 mm

Y Min. 48 mm
Max. 110 mm

VR5250/VR5410/VR2019

	T	Y	VR5250/VR5410/VR2019
	3 - 15 mm	110 - 98 mm	Std.
	15 - 25 mm	98 - 88 mm	+10
	25 - 35 mm	88 - 78 mm	+20
	35 - 45 mm	78 - 68 mm	+30
	45 - 55 mm	68 - 58 mm	+40
	55 - 65 mm	58 - 48 mm	+50

Fitting of extension
Montage von verl ngerung
Montering af forl ngerdele
Montering av f rl ngning

VR5250

VR2019+, VR2119+

VR5410

5400:
5600:

5400A3/A4:
5600A3/A4:

VR5411

32 mm
14 mm

Extension, retrofit
Verl ngerung, nachtr glicher Einbau
Forl ngerdele, eftermontering
F rl ngning, eftermontering
Aanpassing na montage
Modification apr s installation

X 52 - 0 mm

X -15 - 0 mm

	X	VR5250/VR5410/VR2019
	37 - 49 mm	Std.
	27 - 37 mm	+10
	17 - 27 mm	+20
	7 - 17 mm	+30
	-3 - 7 mm	+40
	-13 - -3 mm	+50

Montage van de verlengstukken
Montage des rallonges

VR2019+, VR2119+

 12 mm

5400/5600:


5400A3/ 5600A3:

5400A4:

5600A4:


VR5411

32 mm
14 mm

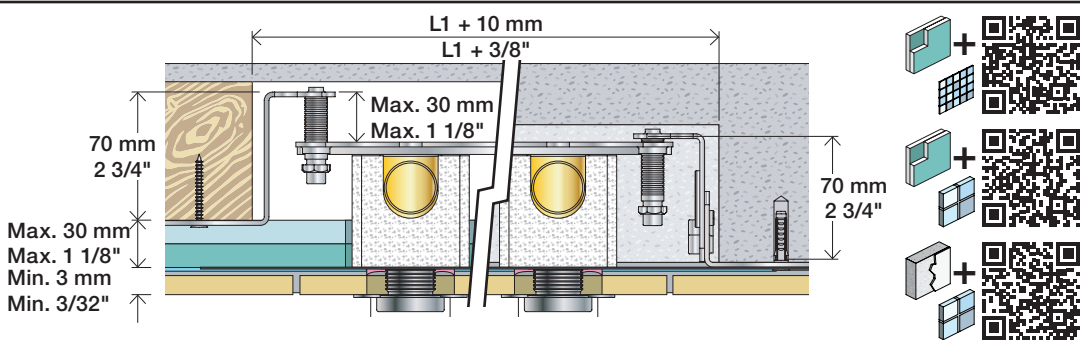

2x13 mm Lightweight wall
Leichtwand
Let væg

Lätta konstruktion
Holle wandconstructie
Construction légère

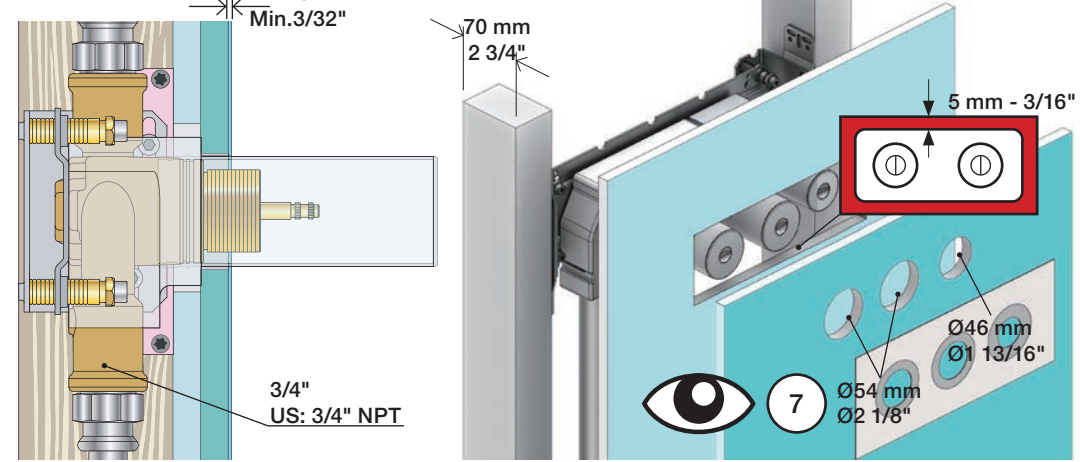

1x15 mm
1x18 mm
1x20 mm

Lightweight wall
Leichtwand
Let væg


Lätta konstruktion
Holle wandconstructie
Construction légère

2x13 mm



Masonry
Mauerwerk
Murværk

Murverk
Massieve wand
Mur Plein







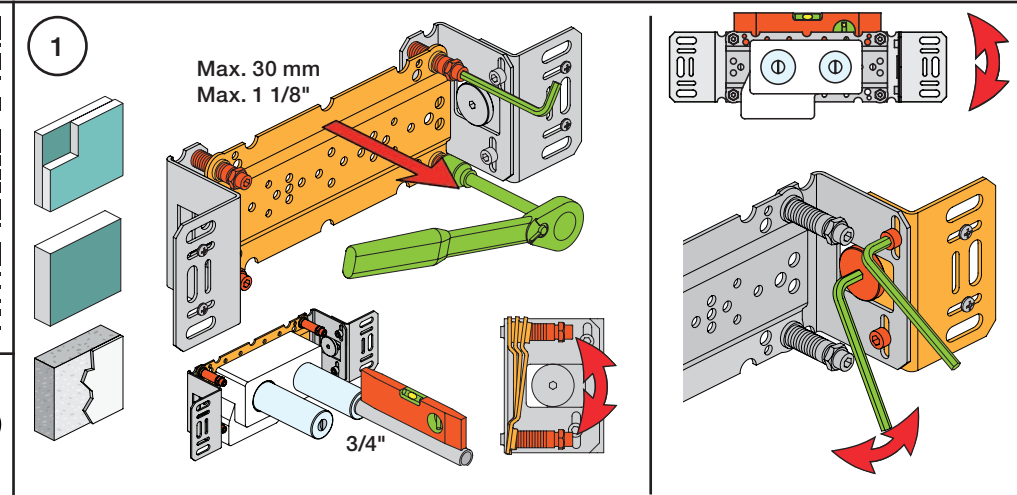


2


Test Pressure
Prüfdruck
testtryk
Test tryck
Test druk
test de pression

Check the local legislation.
Bitte die örtlichen Vorschriften überprüfen.
Tjek de lokale regler.
Kontrollera lokala föreskrifter.
Nazitten lokale regelgeving.
Vérifiez la législation locale.


! Water - Wasser - Vand - Vatten - Water - L'eau
! MAX 1 Minute - Minut - Minuut !

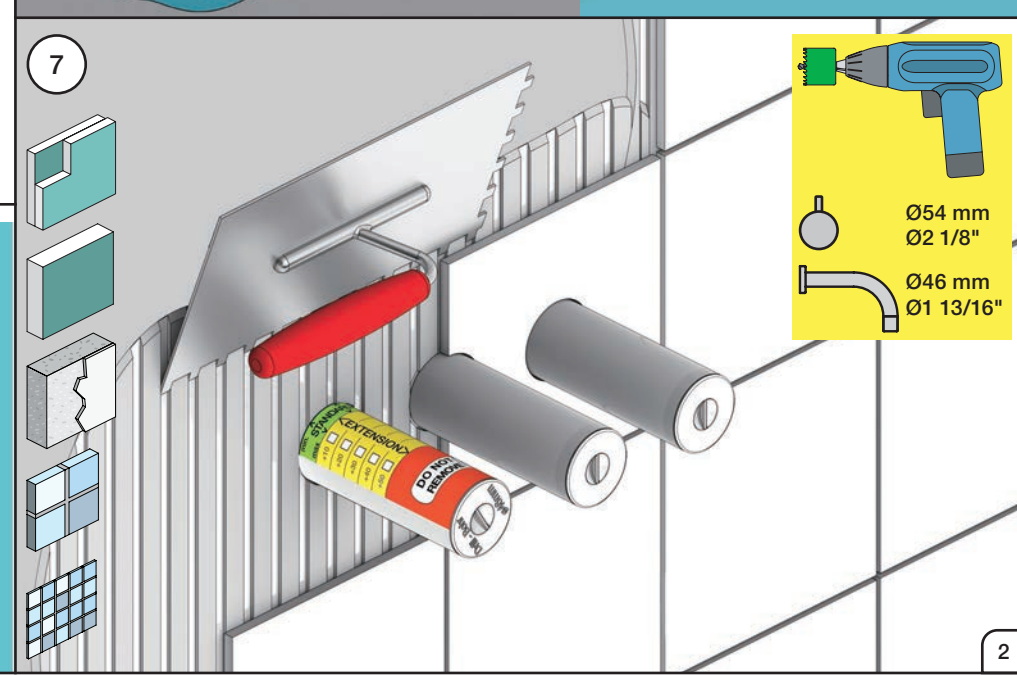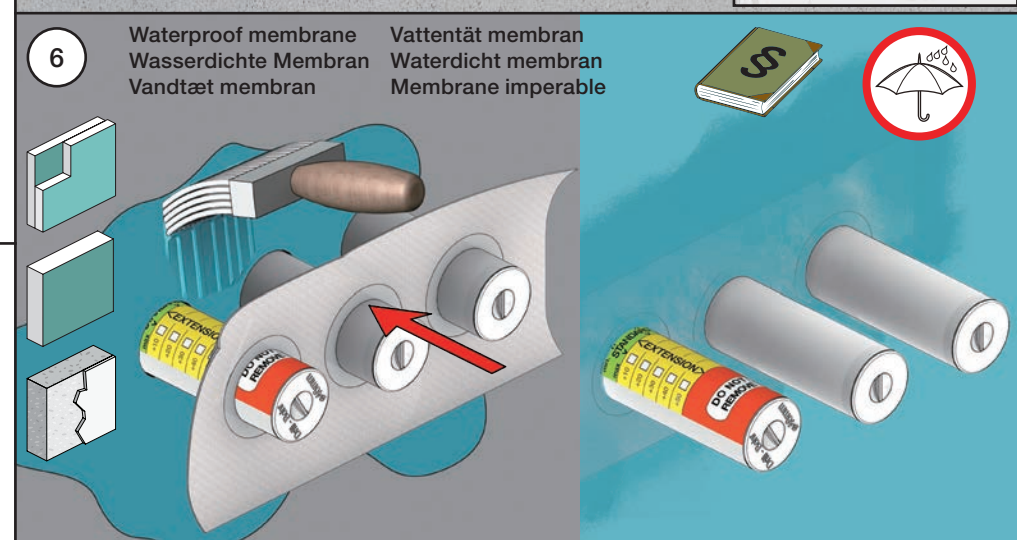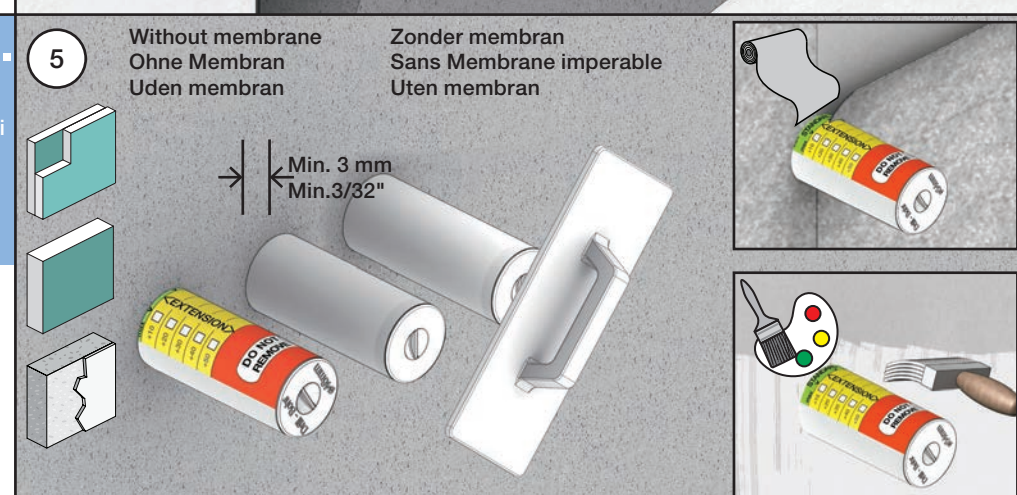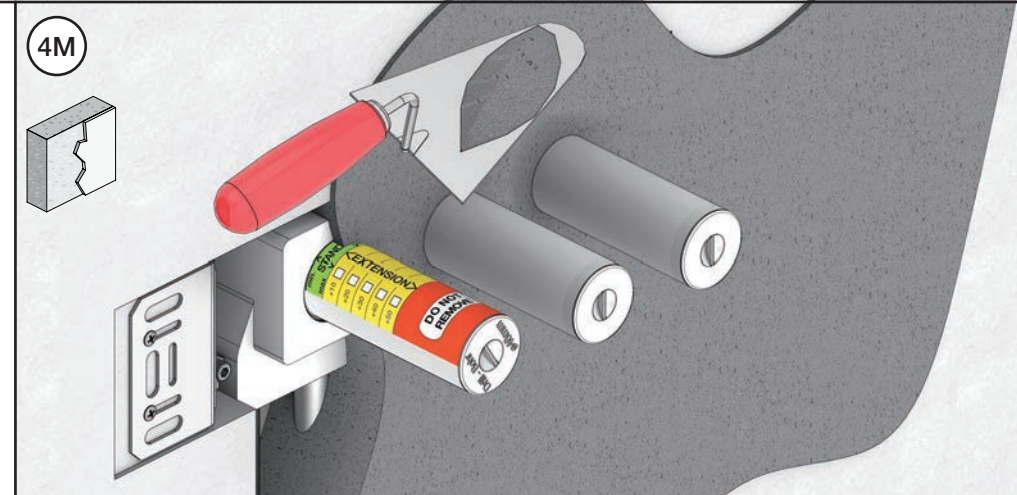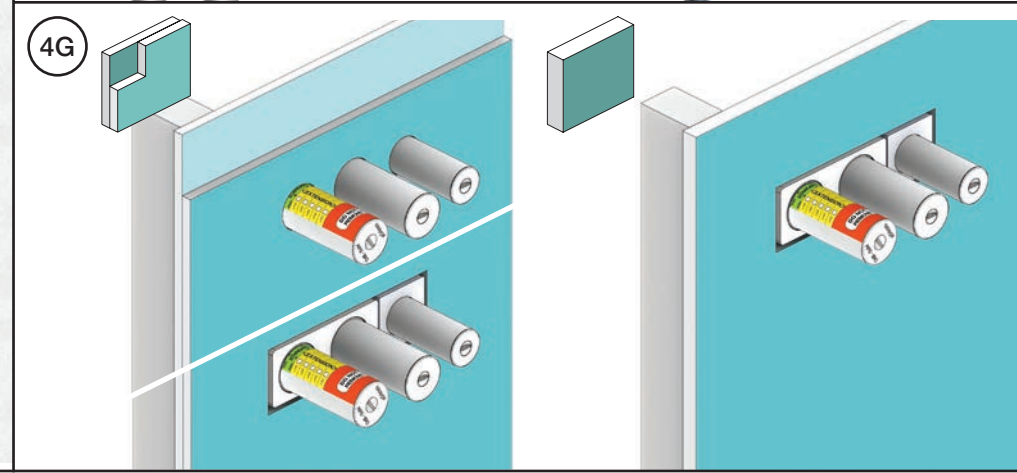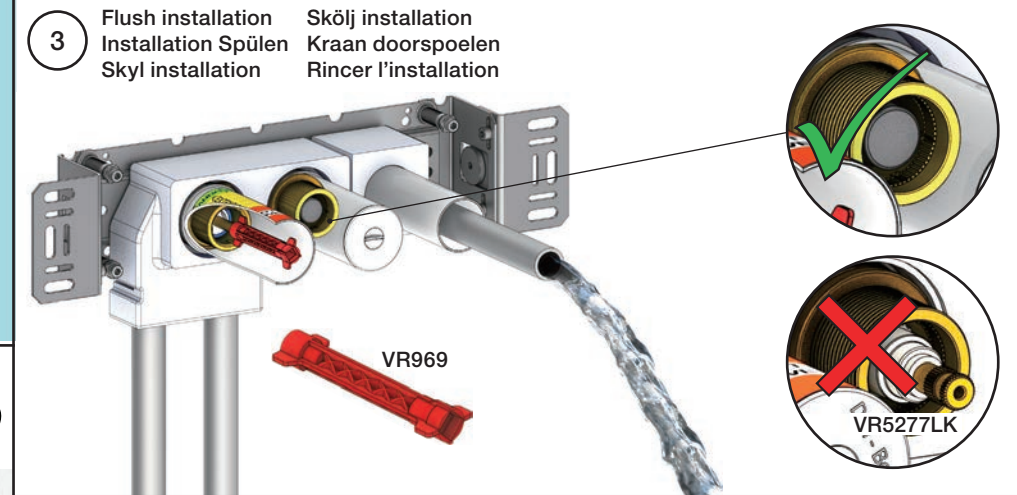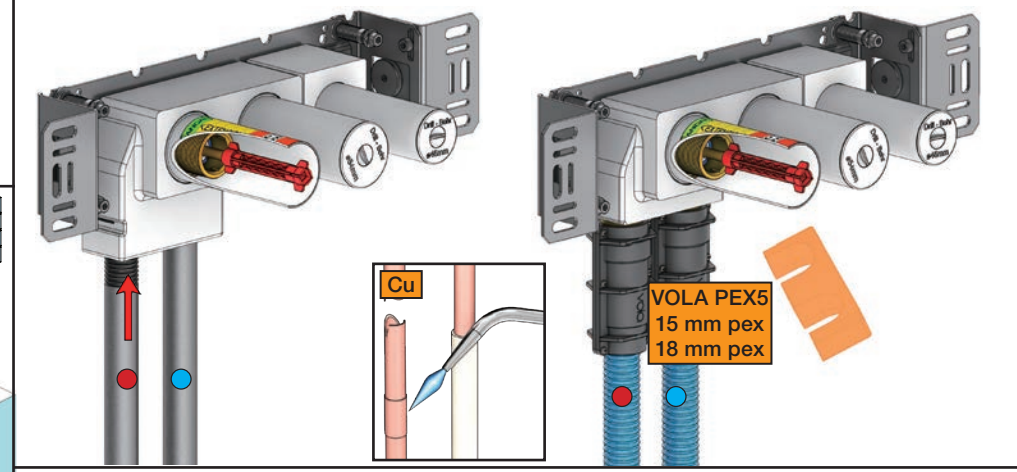


5400VA3

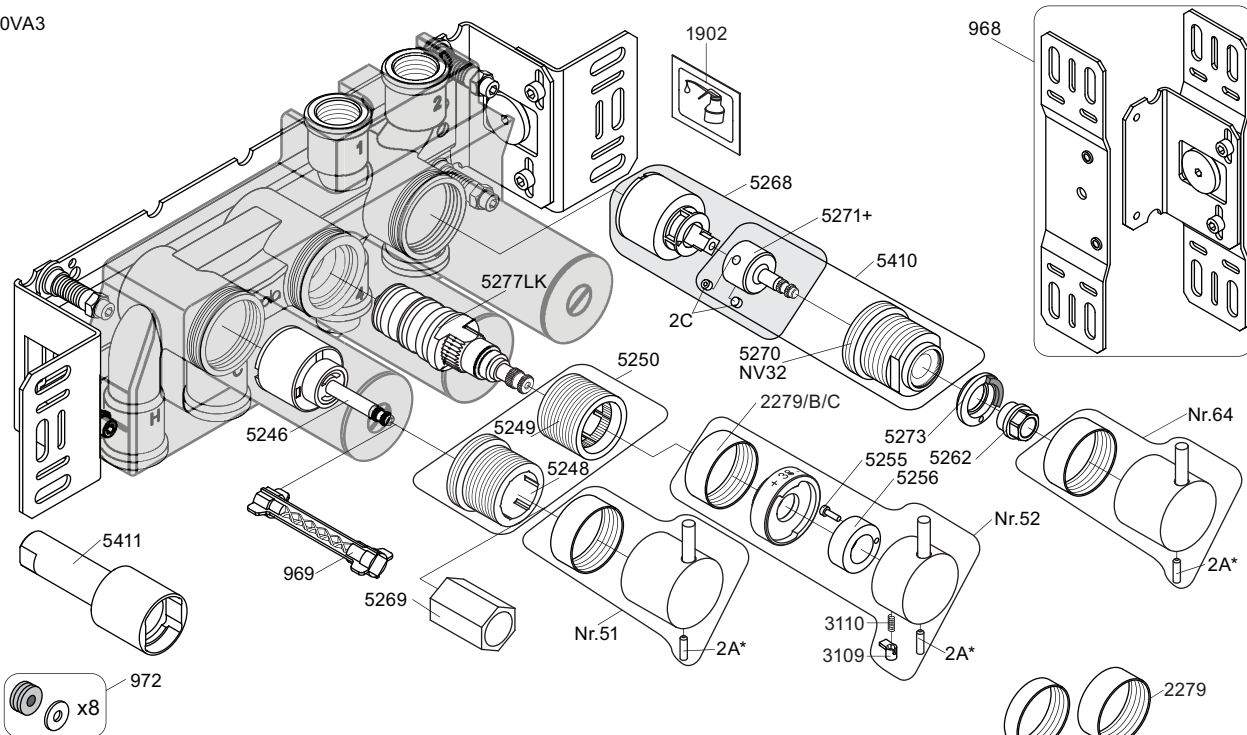


5250+



5410+




5268+



2A* Color

VR2A-Steel: Standard
VR2A-F60: F17-F27-F60
VR2A-F63: F63-F64
VR2A-F65: F19-F65-F70



NR51:

VR5251, VR2279+B+C, VR2A

NR52:

VR2A, VR5252, VR5253, VR5255, VR5256, VR2279+B+C, VR3113, VR2A

NR64:

VR5251, VR2279+B+C, VR2A

VR3113:

VR3109, VR3110, VR5255

VR5250+:

VR5248+, VR5249+, VR5257, VR5258, VR5259, VR5260

VR5257+:

VR5257+, VR5259+

VR5258+:

VR5258+, VR5260+


VR5268+:

2xVR2C, VR1902, VR5268, VR5271+


VR5410+:

2xVR2C, VR5270+, VR5271+


5400VA3
5600VA3

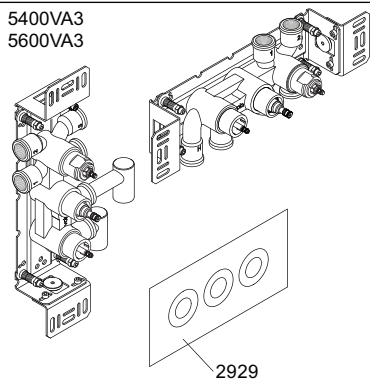


5400NVA3
5400TVA3

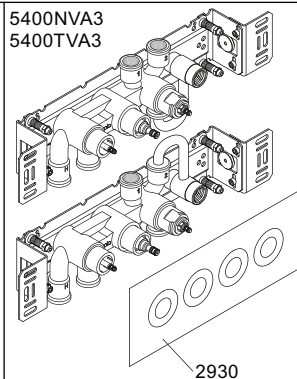


5400FVA3
5400RVA3

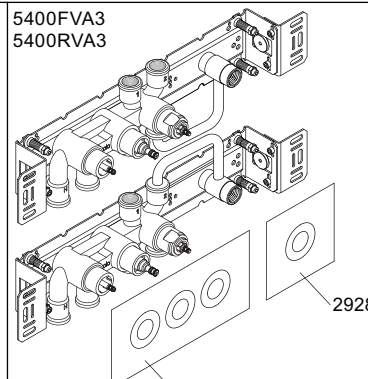


5400DVA3

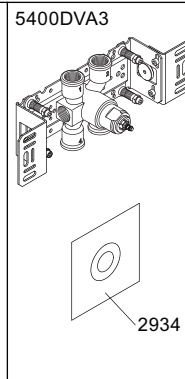


5003B



5004B



5004L



3x2001




3x2001, 001



3x2001, 001



2001



vola

Lunavej 2
DK-8700 Horsens
Tlf : + 45 7023 5500
sales@vola.com
www.vola.com

VOLA 5400VA3

5400FVA3, 5400NVA3

5400RVA3, 5400TVA3

5600VA3

Date

May 22

Rev.

6

Sheet

SB 10.54