


Datum:

Klant:

Project:

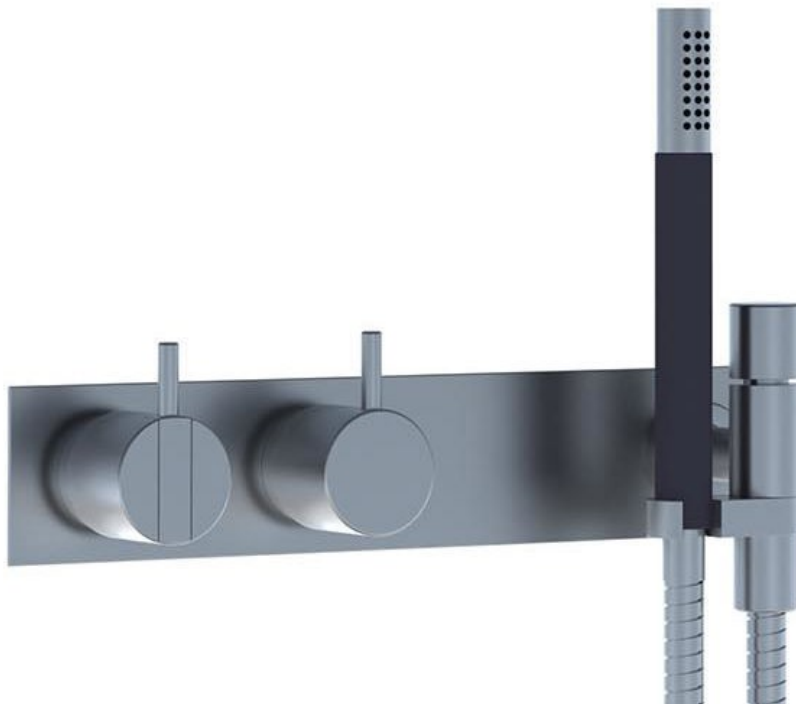


2473-051

Monoknop inbouw douchemengkraan met 2-weg omstel naar handdouche met houder en regendouche, wandmontage. 2473-051UP = Inbouwmengkraan 2400F. 2473-051AP = Bedieningsknop NR21, omstelknop NR24G, handdouche en houder 070, regendouche 050 voor wandmontage, 3-gats afdekplaat 60 x 309 mm 2003.

Doorstroom


	Bar:	1,0	2,0	3,0	4,0	5,0
070	(l/min)	5,2	7,3	9,0	9,0	9,0
050	(l/min)	11,6	16,3	20,0	23,1	25,8

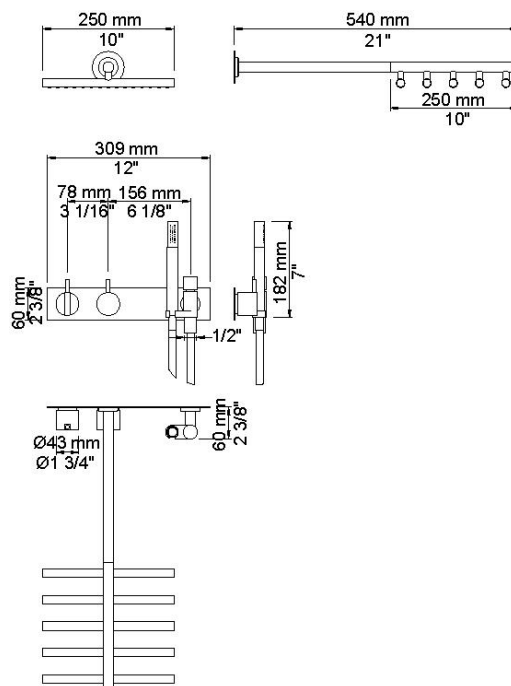**Beschikbaar in de kleuren**


Kleur 02, Grijs	Kleur 21, Karmijnrood
Kleur 04, Blauw	Kleur 25, Rose
Kleur 05, Oranje	Kleur 27, Mat zwart
Kleur 06, Lichtgroen	Kleur 28, Mat wit
Kleur 08, Geel	Kleur 40, Geborsteld roestvrij staal
Kleur 09, Donkergrijs	Kleur 60, Zwart
Kleur 12, Bruin	Kleur 61, Geborsteld zwart
Kleur 14, Oranjerood	Kleur 62, Diepzwart
Kleur 15, Donkerblauw	Kleur 63, Koper
Kleur 16, Chroom	Kleur 64, Geborsteld koper
Kleur 17, Hoogglans zwart	Kleur 65, Goud
Kleur 18, Wit	Kleur 68, Zilver
Kleur 19, Messing	Kleur 70, Geborsteld goud
Kleur 20, Geborsteld chroom	

**001**


Rozet Ø60 mm, gat Ø30 mm.

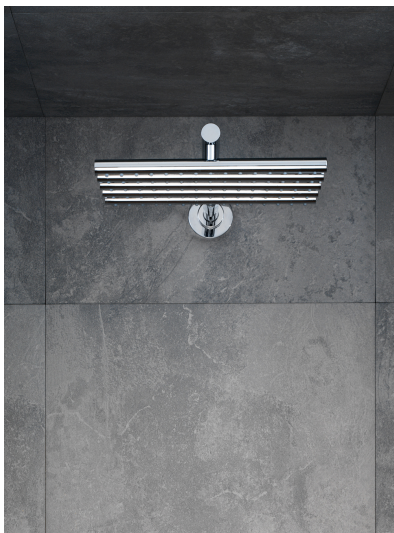**050**

Regendouche, totale lengte 540 mm, wandmontage. Exclusief aansluithuis 200M.

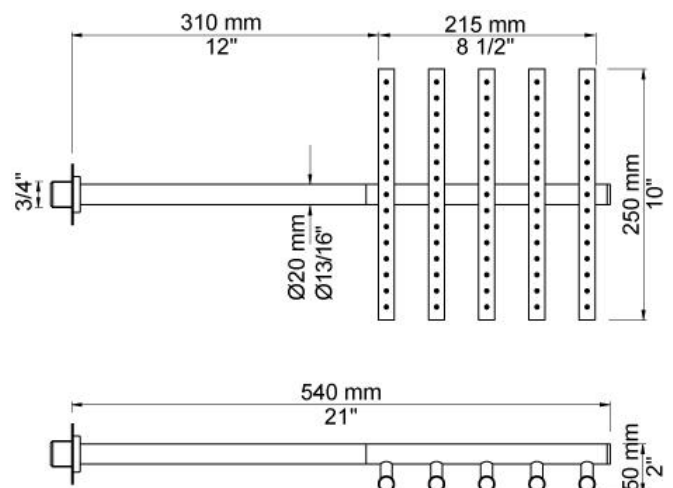
**070**

Muuraansluitbocht met terugslagklep, handdouche met houder links en metalen doucheslang 1500 mm. Exclusief aansluithuis 200M, exclusief rozet.





Technical drawing of a rectangular plate with three circular holes. The plate dimensions are 309 mm (12") wide and 60 mm (2 3/8") high. The holes are spaced 78 mm (3 1/8") apart. The hole diameters are 39 mm (1 1/2"), 33 mm (1 3/8"), and 30 mm (1 1/8").

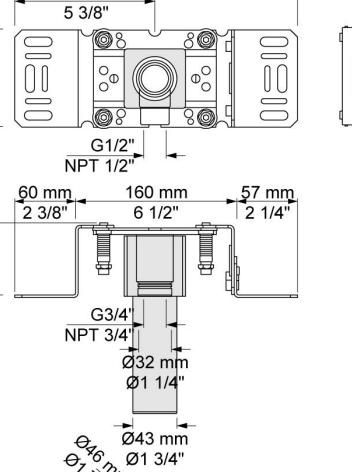

Technical drawing of the G1/2" NPT 1/2" fitting, showing dimensions in mm and inches.

Top View Dimensions:

- Overall width: 276 mm (10 7/8")
- Distance between mounting holes: 137 mm (5 3/8")
- Height: 95 mm (3 3/4")

Side View Dimensions:


- Overall height: 70 mm (2 3/4")
- Distance from mounting hole to centerline: 60 mm (2 3/8")
- Distance between mounting holes: 160 mm (6 1/2")
- Distance from centerline to end of fitting: 57 mm (2 1/4")

Thread and Hole Dimensions:

- Thread: G1/2" NPT 1/2"
- Threaded section length: 32 mm (1 1/4")
- Threaded section diameter: Ø32 mm
- Overall diameter: Ø43 mm (Ø1 3/4")
- Outer diameter at base: Ø46 mm (Ø1 7/8")

Assembly Note:

Use a 46 mm (1 7/8") drill bit for mounting.

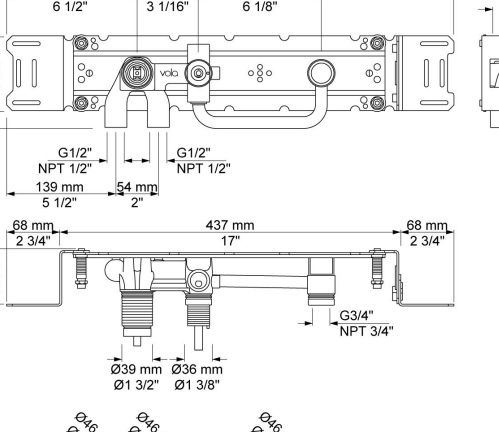

Technical drawing of the G1/2" NPT 1/2" valve assembly, showing dimensions in millimeters (mm) and inches (").

Top View Dimensions:

- Overall width: 570 mm (23")
- Distance from left end to first valve: 166 mm (6 1/2")
- Distance between first and second valves: 78 mm (3 1/16")
- Distance from second valve to right end: 156 mm (6 1/8")
- Overall height: 120 mm (4 3/4")
- Distance from top to center of valves: 95 mm (3 3/4")

Right View Dimensions:

- Connection: G1/2" NPT 1/2"

Front View Dimensions:

- Distance from left end to first valve: 139 mm (5 1/2")
- Distance between first and second valves: 54 mm (2")
- Connection: G1/2" NPT 1/2"

Bottom View Dimensions:


- Distance from left end to first valve: 68 mm (2 3/4")
- Overall width: 437 mm (17")
- Distance from second valve to right end: 68 mm (2 3/4")
- Distance from top to center of valves: 70 mm (2 3/4")
- Connection: G3/4" NPT 3/4"
- Valve diameters: Ø39 mm (Ø1 3/8") and Ø36 mm (Ø1 3/8")

Drill Bit and Hole Dimensions:

- Drill bit diameter: Ø46 mm (Ø1 7/8")
- Hole diameter: Ø46 mm (Ø1 7/8")
- Hole diameter: Ø46 mm (Ø1 7/8")

**NR21**

Bedieningsknop voor 2100, 2100X, 2200, 2300 en 2400.

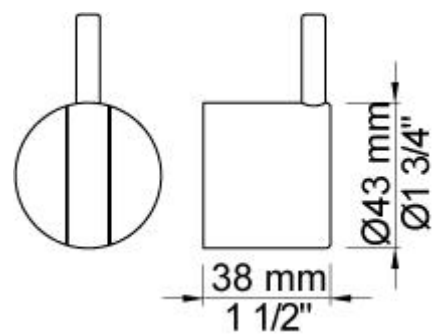**NR24G**

Omstelknop voor 2400 met stift in dezelfde. Kleuren als de bedieningsknop (standaard uitvoering).

