

	Datum:
	Klant:
	Project:



CE



4911VS

Inbouw mengkraan met vlakke sensor voor handvrije bediening, vaste uitloop 160 mm met waterbesparende mousseur. Standaard geleverd met batterijen. De watertemperatuur is met de bedieningsknop te regelen. Gebruik via netspanning mogelijk, adapter apart bestellen.

Haakse uitvoering.

Incl. elektronische box VR2618.

4911VSUP = Inbouw mengkraan 4900VS, sensor kabel VR509.

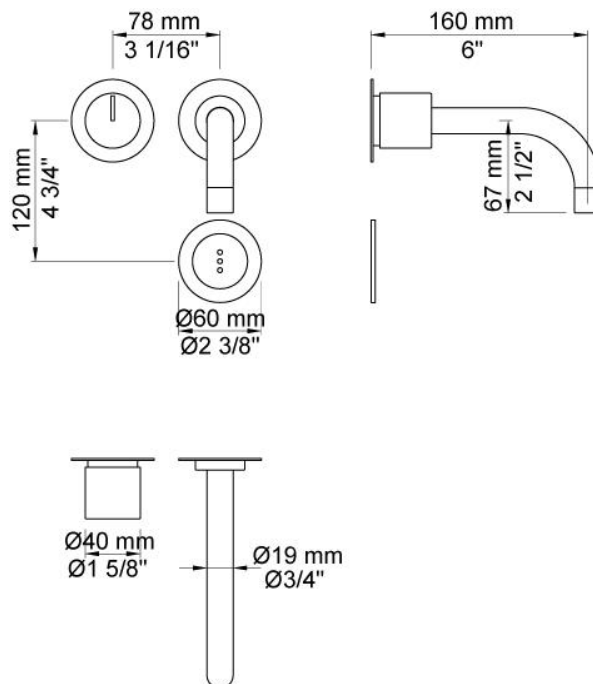
4911VSAP = Bedieningsknop NR41, sensor VR510, 160 mm vaste uitloop 010, rozetten Ø60 mm 001, 3001, VR512.

Ada approved.

Doorstroom

	Bar:	1,0	2,0	3,0	4,0	5,0
4911VS	(l/min)	2,9	4,1	5,0	5,0	5,0
4911VS ¹⁾	(l/min)	2,6	3,7	4,5	4,5	4,5

¹⁾ USA Standard

**Beschikbaar in de kleuren**


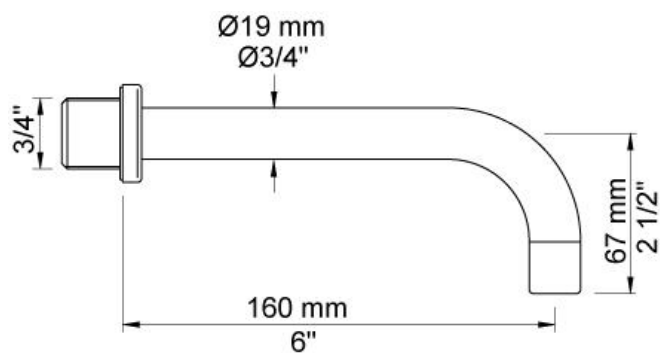
Kleur 02, Grijs	Kleur 21, Karmijnrood
Kleur 04, Blauw	Kleur 25, Rose
Kleur 05, Oranje	Kleur 27, Mat zwart
Kleur 06, Lichtgroen	Kleur 28, Mat wit
Kleur 08, Geel	Kleur 40, Geborsteld roestvrij staal
Kleur 09, Donkergrijs	Kleur 60, Zwart
Kleur 12, Bruin	Kleur 61, Geborsteld zwart
Kleur 14, Oranjerood	Kleur 62, Diepzwart
Kleur 15, Donkerblauw	Kleur 63, Koper
Kleur 16, Chroom	Kleur 64, Geborsteld koper
Kleur 17, Hoogglans zwart	Kleur 65, Goud
Kleur 18, Wit	Kleur 68, Zilver
Kleur 19, Messing	Kleur 70, Geborsteld goud
Kleur 20, Geborsteld chroom	

**001**

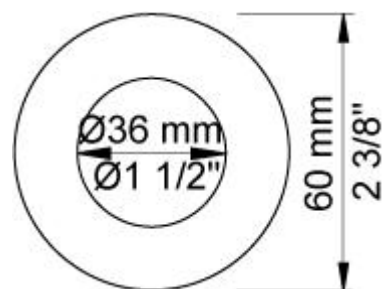
Rozet Ø60 mm, gat Ø30 mm.

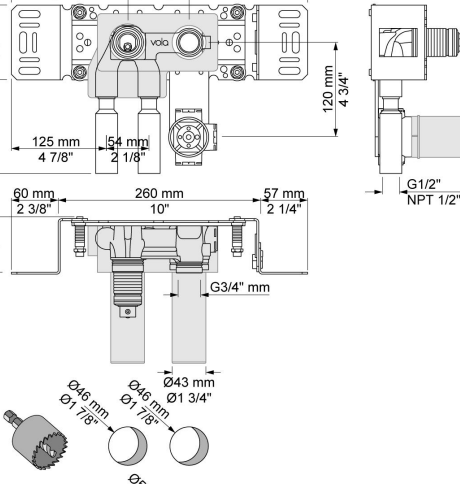
**010**

Vaste uitloop 160 mm met waterbesparende mousseur.

**3001**

Rozet Ø60 mm, gat Ø36 mm.





Technical drawing of the G1/2" NPT 1/2" valve assembly, showing three views: front, side, and top. The drawing includes dimensions in millimeters (mm) and inches (").

Front View Dimensions:

- Overall width: 377 mm (14 3/4")
- Top flange width: 148 mm (5 7/8")
- Top flange width (inner): 78 mm (3 1/16")
- Overall height: 214 mm (8 1/4")
- Top flange thickness: 95 mm (3 3/4")
- Distance from top flange to valve body: 125 mm (4 7/8")
- Valve body width: 54 mm (2 1/8")
- Valve body height: 120 mm (4 3/4")
- Distance from top flange to valve body (inner): 60 mm (2 3/8")
- Valve body width (inner): 260 mm (10")
- Valve body height (inner): 57 mm (2 1/4")
- Valve body width (inner, bottom): 60 mm (2 3/8")
- Valve body height (inner, bottom): 70 mm (2 3/4")
- Valve body width (inner, bottom): 57 mm (2 1/4")
- Valve body width (inner, bottom): 60 mm (2 3/8")

Side View Dimensions:

- Overall height: 120 mm (4 3/4")
- Valve body width: 54 mm (2 1/8")
- Valve body height: 120 mm (4 3/4")
- Valve body width (inner): 260 mm (10")
- Valve body height (inner): 57 mm (2 1/4")
- Valve body width (inner, bottom): 60 mm (2 3/8")
- Valve body height (inner, bottom): 70 mm (2 3/4")
- Valve body width (inner, bottom): 57 mm (2 1/4")
- Valve body width (inner, bottom): 60 mm (2 3/8")

Top View Dimensions:

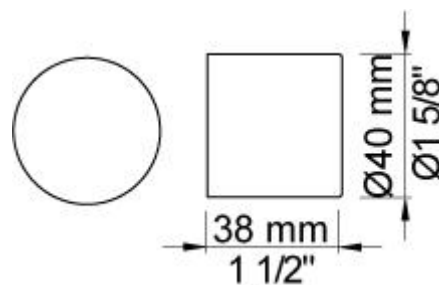
- Overall width: 377 mm (14 3/4")
- Top flange width: 148 mm (5 7/8")
- Top flange width (inner): 78 mm (3 1/16")
- Overall height: 214 mm (8 1/4")
- Top flange thickness: 95 mm (3 3/4")
- Distance from top flange to valve body: 125 mm (4 7/8")
- Valve body width: 54 mm (2 1/8")
- Valve body height: 120 mm (4 3/4")
- Distance from top flange to valve body (inner): 60 mm (2 3/8")
- Valve body width (inner): 260 mm (10")
- Valve body height (inner): 57 mm (2 1/4")
- Valve body width (inner, bottom): 60 mm (2 3/8")
- Valve body height (inner, bottom): 70 mm (2 3/4")
- Valve body width (inner, bottom): 57 mm (2 1/4")
- Valve body width (inner, bottom): 60 mm (2 3/8")

Port Dimensions:

- Port 1: Ø46 mm (Ø1 7/8")
- Port 2: Ø46 mm (Ø1 7/8")
- Port 3: Ø43 mm (Ø1 3/4")
- Port 4: Ø54 mm (Ø2 1/8")

Threaded Port Dimensions:

- Threaded Port 1: G1/2" NPT 1/2"
- Threaded Port 2: G1/2" NPT 1/2"
- Threaded Port 3: G3/4" mm



Bedieningsknop voor 4900.



VR2618

Technical drawing of the Vola 10000 BT module showing front and side views with dimensions.

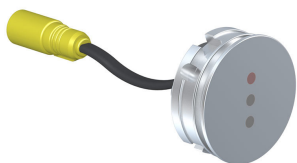
Front View Dimensions:

- Overall width: 180 mm (7")
- Distance between top mounting holes: 68 mm (2 5/8")
- Distance between bottom mounting holes: 68 mm (2 5/8")
- Overall height: 146 mm (5 3/4")
- Top mounting hole offset from left edge: 33 mm (1 1/4")

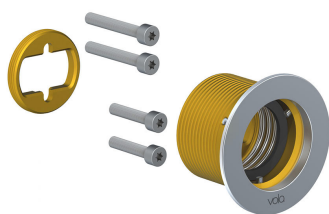
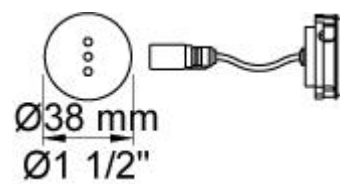
Side View Dimensions:

- Overall depth: 54 mm (2 1/8")
- Distance from top face to top mounting hole: 30 mm (1 1/8")
- Distance from bottom face to bottom mounting hole: 65 mm (2 1/2")
- Bottom mounting hole offset from right edge: 3/8"

The front view also shows the "vola" logo and two circular symbols on the module's face.

**VR510**

Sensor voor 4300, 4800, en 4900.

**VR512**

Rozet Ø60 mm, gat Ø38 mm voor 4300, 4800 en 4900.

