

	Datum:
	Klant:
	Project:



PSB Singapore



Duoknop mengkraan S50DH + S50D met draaibare uitloop 090E, sprong 200 mm.

	Bar:	1,0	2,0	3,0	4,0	5,0
SC8 ¹⁾	(l/min)	28,9	40,8	50,0	57,7	64,5
SC8	(l/min)	15,0	21,2	26,0	30,0	30,0

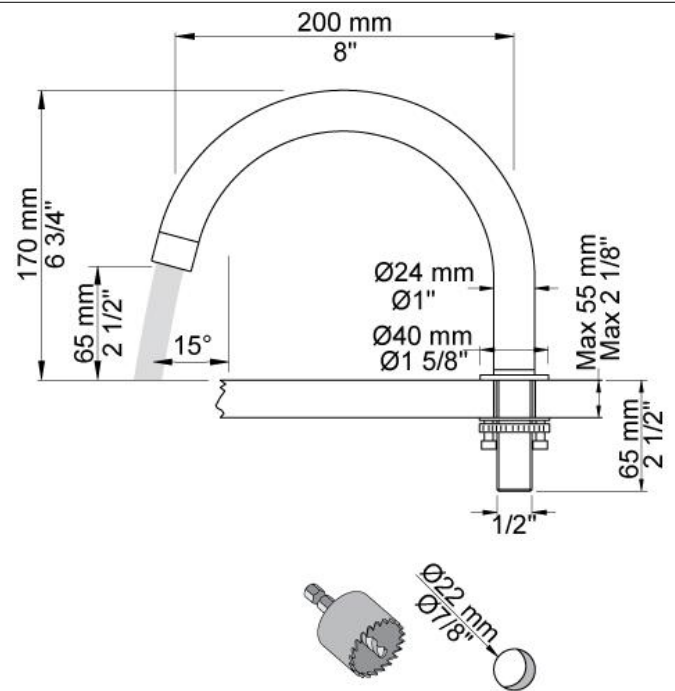
Technical drawing of the 1000 Series 1/2 inch wall bracket. The drawing includes side and top views with the following dimensions:

- Top View:**
 - Two mounting holes with a diameter of $\varnothing 30 \text{ mm}$ ($\varnothing 1 \frac{1}{16}$ inch).
 - Distance between mounting holes: 78 mm ($3 \frac{1}{16}$ inch).
 - Distance from mounting hole to bracket base: 78 mm ($3 \frac{1}{16}$ inch).
- Side View:**
 - Overall height: 170 mm ($6 \frac{3}{4}$ inch).
 - Distance from mounting hole to bracket base: 65 mm ($2 \frac{1}{2}$ inch).
 - Distance from mounting hole to bracket base: 110 mm ($4 \frac{1}{4}$ inch).
 - Distance from mounting hole to bracket base: 200 mm (8 inch).
 - Distance from mounting hole to bracket base: Max 300 mm (Max 12 inch).
 - Distance from mounting hole to bracket base: Max 45 mm (Max 1 $\frac{3}{4}$ inch).
 - Distance from mounting hole to bracket base: $\varnothing 24 \text{ mm}$ ($\varnothing 1$ inch).
 - Distance from mounting hole to bracket base: $\varnothing 40 \text{ mm}$ ($\varnothing 1 \frac{5}{8}$ inch).
 - Distance from mounting hole to bracket base: $\varnothing 60 \text{ mm}$ ($\varnothing 2 \frac{3}{8}$ inch).
 - Distance from mounting hole to bracket base: $\varnothing 40 \text{ mm}$ ($\varnothing 1 \frac{5}{8}$ inch).
 - Distance from mounting hole to bracket base: $\varnothing 28 \text{ mm}$ ($\varnothing 1 \frac{1}{8}$ inch).
 - Distance from mounting hole to bracket base: $\varnothing 22 \text{ mm}$ ($\varnothing \frac{7}{8}$ inch).
 - Distance from mounting hole to bracket base: $\varnothing 30 \text{ mm}$ ($\varnothing 1 \frac{1}{16}$ inch).
 - Distance from mounting hole to bracket base: $\varnothing 22 \text{ mm}$ ($\varnothing \frac{7}{8}$ inch).
 - Distance from mounting hole to bracket base: $\varnothing 30 \text{ mm}$ ($\varnothing 1 \frac{1}{16}$ inch).

Kleur 02, Grijs	Kleur 21, Karmijnrood
Kleur 04, Blauw	Kleur 25, Rose
Kleur 05, Oranje	Kleur 27, Mat zwart
Kleur 06, Lichtgroen	Kleur 28, Mat wit
Kleur 08, Geel	Kleur 40, Geborsteld roestvrij staal
Kleur 09, Donkergrijs	Kleur 60, Zwart
Kleur 12, Bruin	Kleur 61, Geborsteld zwart
Kleur 14, Oranjerood	Kleur 62, Diepzwart
Kleur 15, Donkerblauw	Kleur 63, Koper
Kleur 16, Chroom	Kleur 64, Geborsteld koper
Kleur 17, Hoogglans zwart	Kleur 65, Goud
Kleur 18, Wit	Kleur 68, Zilver
Kleur 19, Messing	Kleur 70, Geborsteld goud
Kleur 20, Geborsteld chroom	

**090E**

Draaibare uitloop met waterbesparende mousseur, Ø24 mm, hoogte 170 mm, sprong 200 mm. Kraangat, uitloop: 22 mm.

**S50**

Stopkraan 1/2", met keramisch cartouche voor bladmontage. Rechtsdraaiend, met terugslagklep. Rozet Ø60 mm 001G. Kraangat: 30 mm.

